


SUPERMICR[®] SuperServer 6028U-E1CNR4T+/E1CNRT+ Quick Reference Guide

Board Layout

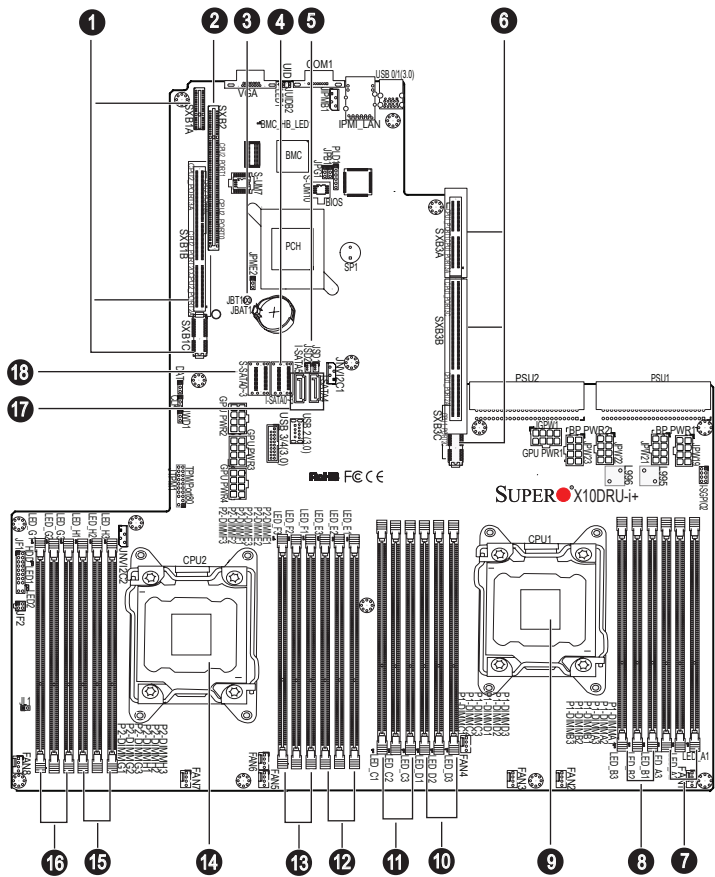

No.	Description
1	SXB1A/1B/1C: Proprietary PCI-e Slot used for WIO-Left Devices (supported by CPU2)
2	SXB2: Proprietary PCI-e 3.0 x8 Slot for WIO-Right Devices or Add-on Cards (supported by CPU2)
3	JBT1: CMOS Clear
4	I-SATA0~3: SATA 3.0 Ports (Intel PCH)
5	JSD1/JSD2: SATA DOM (Device_on_Module) Power Connectors
6	SXB3A/3B/3C: Proprietary PCI-e Slot for Ultra Riser Devices (supported by CPU1)
7	P1-DIMMA1(Blue)/P1-DIMMA2/P1-DIMMA3 slot
8	P1-DIMMB1(Blue)/P1-DIMMB2/P1-DIMMB3 slot
9	CPU1 (Install CPU1 first)
10	P1-DIMMD1(Blue)/P1-DIMMD2/P1-DIMMD3 slot
11	P1-DIMMC1(Blue)/P1-DIMMC2/P1-DIMMC3 slot
12	P2-DIMME1(Blue)/P2-DIMME2/P2-DIMME3 slot
13	P2-DIMMF1(Blue)/P2-DIMMF2/P2-DIMMF3 slot
14	CPU2
15	P2-DIMMH1(Blue)/P2-DIMMH2/P2-DIMMH3 slot
16	P2-DIMMG1(Blue)/P2-DIMMG2/P2-DIMMG3 slot
17	I-SATA 4~5: SATA 3.0 Ports (Intel PCH)
18	S-SATA0~3: SATA 3.0 Ports (Intel SCU)

Memory

Processors and their Corresponding Memory Modules												
CPU#	Corresponding DIMM Modules											
CPU 1	A1	A2	A3	B1	B2	B3	C1	C2	C3	D1	D2	D3
CPU 2	E1	E2	E3	F1	F2	F3	G1	G2	G3	H1	H2	H3

Processor and Memory Module Population for Optimal Performance	
CPU and Memory Population Configuration Table (For memory to work properly, please follow the instructions below.)	
1 CPU & 2 DIMMs	CPU1 P1-DIMMA1/P1-DIMMB1
1 CPU & 4 DIMMs	CPU1 P1-DIMMA1/P1-DIMMB1, P1-DIMMC1/P1-DIMMD1
1 CPU & 5~8 DIMMs	CPU1 P1-DIMMA1/P1-DIMMB1, P1-DIMMC1/P1-DIMMD1 + Any memory pairs in P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2 slots
2 CPUs & 4 DIMMs	CPU1 + CPU2 P1-DIMMA1/P1-DIMMB1, P2-DIMME1/P2-DIMMF1
2 CPUs & 6 DIMMs	CPU1 + CPU2 P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1
2 CPUs & 8 DIMMs	CPU1 + CPU2 P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1
2 CPUs & 8~16 DIMMs	CPU1/CPU2 P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1, P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2, P2-DIMME2/P2-DIMMF2/P2-DIMMG2/P2-DIMMH2
2 CPUs & 16 DIMMs	CPU1/CPU2 P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1, P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2, P2-DIMME2/P2-DIMMF2/P2-DIMMG2/P2-DIMMH2
2 CPUs & 16~24 DIMMs	CPU1/CPU2 P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1, P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2, P2-DIMME2/P2-DIMMF2/P2-DIMMG2/P2-DIMMH2, P1-DIMMA3/P1-DIMMB3/P1-DIMMC3/P1-DIMMD3, P2-DIMME3/P2-DIMMF3/P2-DIMMG3/P2-DIMMH3


DIMM Module Population Configuration

DDR4 Memory POR for Haswell-EP									
Type	Ranks Per DIMM and Data Width	DIMM Capacity (GB)		Speed (MT/s); Voltage (V); Slot Per Channel (SPC) and DIMM Per Channel (DPC)					
				1 Slot Per Channel		2 Slots Per Channel		3 Slots Per Channel	
				1DPC		1DPC	2DPC	1DPC	2DPC
		4Gb	8Gb	1.2V		1.2V	1.2V	1.2V	1.2V
RDIMM	SRx4	8GB	16GB	2133	2133	1866	2133	1866	1600
RDIMM	SRx8	4GB	8GB	2133	2133	1866	2133	1866	1600
RDIMM	DRx8	8GB	16GB	2133	2133	1866	2133	1866	1600
RDIMM	DRx4	16GB	32GB	2133	2133	1866	2133	1866	1600
LRDIMM	QRx4	32GB	64GB	2133	2133	2133	2133	2133	1600

Beep Codes


Beep Code	Error Message	Description
1 beep	Refresh	Circuits have been reset (Ready to power up)
5 short beeps and 1 long beep	Memory error	No memory detected in the system
5 beeps	No Con-In or No Con-Out devices	Con-In: USB or PS/2 keyboard, PCI or Serial Console Redirection, IPMI KVM or SOL Con-Out: Video Controller, PCI or Serial Console Redirection, IPMI SOL
1 beep per device	Refresh	1 beep for each USB device

Front View & Interface

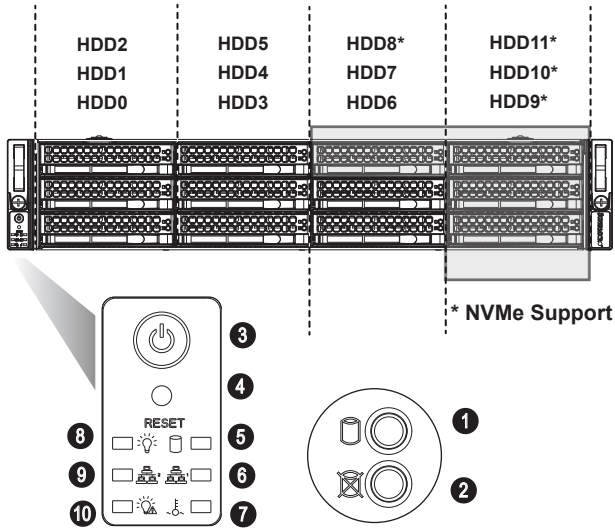

No.	Description	No.	Description
1	Hard Drive Signal	6	LAN1 LED
2	Hard Drive Fail	7	Overheat & Fan Fail LED
3	Power Button	8	Power LED
4	Reset Button	9	LAN2 LED
5	Device Activity LED	10	Power Failure LED


Rear View

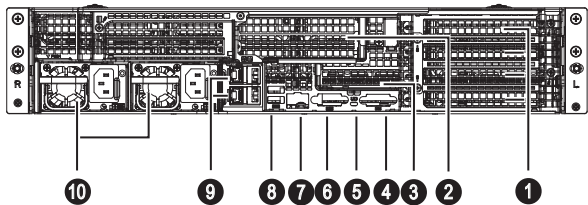


No.	Description
1	4 PCI-E 3.0 x8 (CPU2) Expansion Slots (Full-height 4.2", Length 10.5")
2	PCI-E 3.0 x8 (CPU1) Expansion Slot (Full height 4.2", Length 10.5")*
3	PCI-E 3.0 x8 (CPU2) Expansion Slot (Low-profile 2.536", Half-Length 6.6")
4	VGA Port
5	UID Button (Unit Identifier Button)
6	COM Port
7	Dedicated LAN for IPMI
8	USB 3.0 Ports
9	LAN Ports (2 or 4)
10	Redundant Power Supply Module

* Not Available on E1CNR4T+ Models

CPU Installation

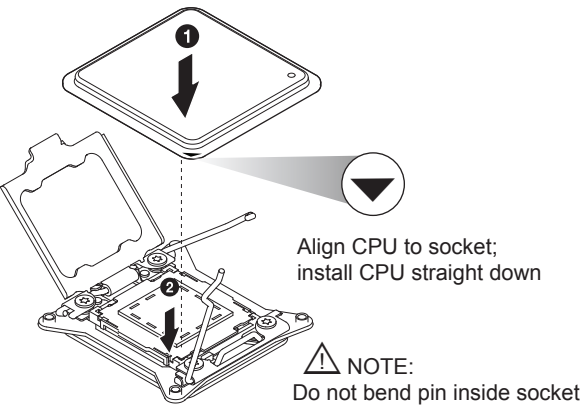

Heatsink Installation

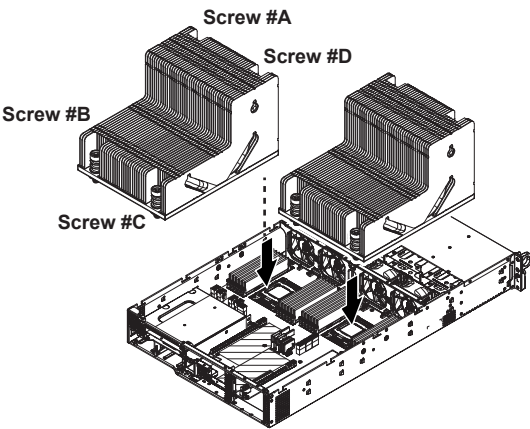

1. Place the heatsink on top of the installed CPU.
2. Align the four screws to the socket.
3. Holding the heatsink in place, screw down as shown (cross pattern, in order: A, C, B, D).
4. Note: Only use 6-8 lb/f of torque; otherwise, hand-tighten each screw to avoid damaging the CPU.

Caution

SAFETY INFORMATION
IMPORTANT: See installation instructions and safety warning before connecting system to power supply.
http://www.supermicro.com/about/policies/safety_information.cfm

WARNING:
To reduce risk of electric shock/damage to equipment, disconnect power from server by disconnecting all power cords from electrical outlets.
If any CPU socket empty, install protective plastic CPU cap

CAUTION:
Always be sure all power supplies for this system have the same power output. If mixed power supplies are installed, the system will not operate.

For more information go to :
<http://www.supermicro.com/support>

