



SUPERMICR○[®] SuperServer[®] SYS-422GA-NBRT-LCC Quick Reference Guide

Front Features

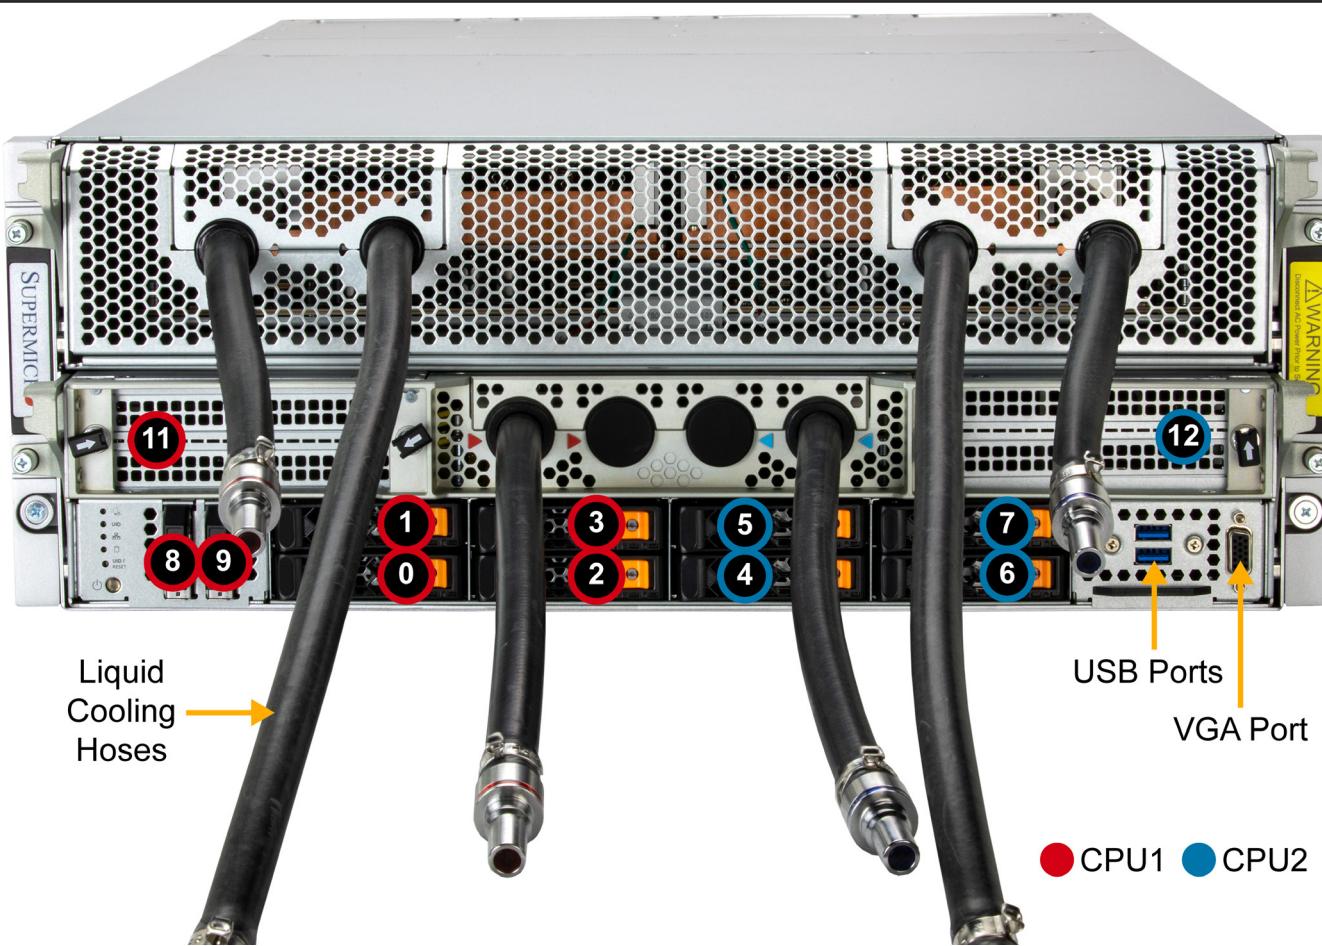

Rear Features

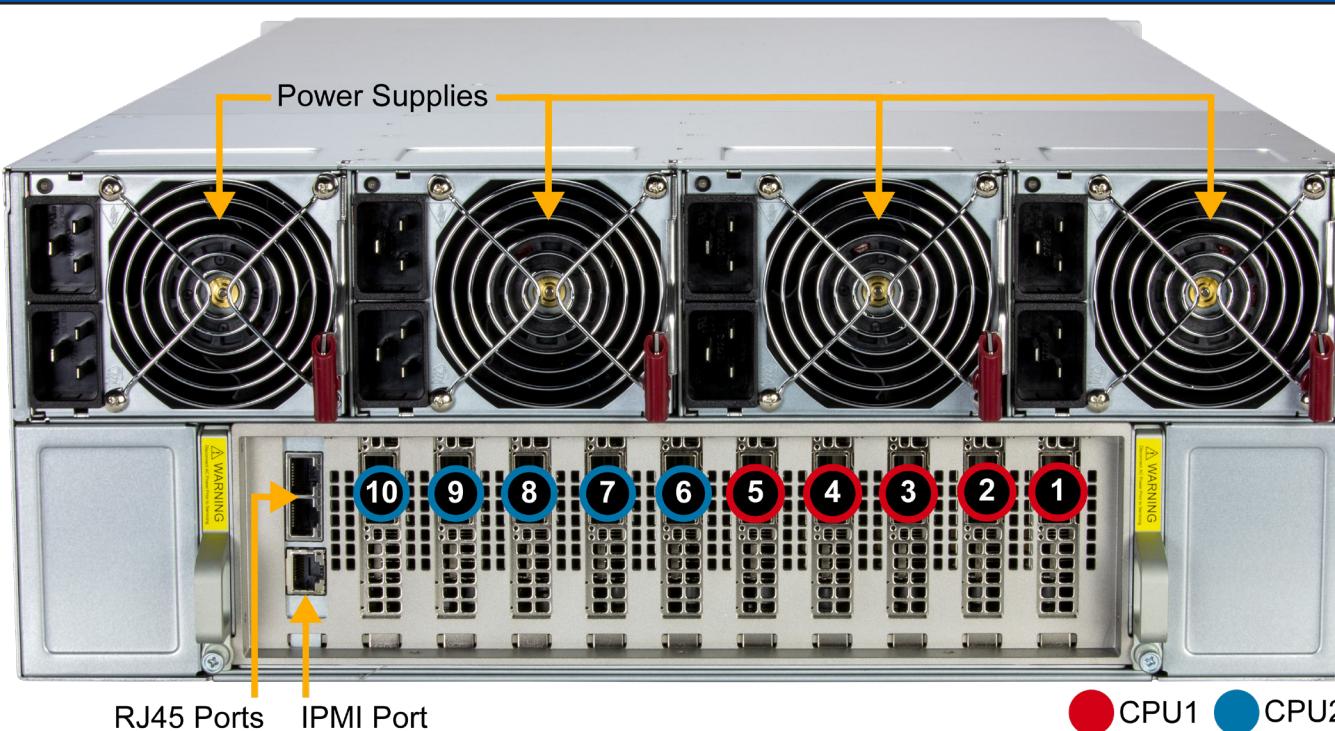

BMC Password


Each system comes with a unique default password for the ADMIN user. This can be found on a sticker on the motherboard and another on the chassis service tag. If necessary, the password can be reset.

For more information, please visit
<https://www.supermicro.com/en/solutions/management-software/bmc-resources>

Product Page



PCIe Tray Components

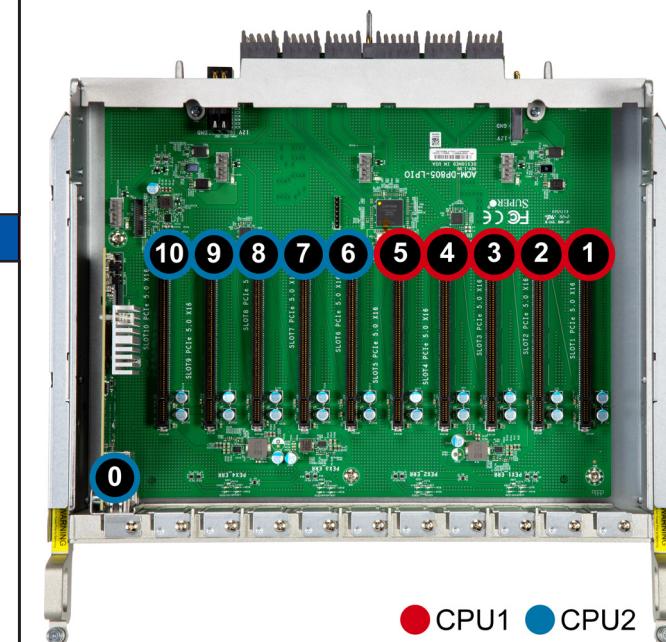

Front Features	
Feature	Description
USB Ports	Two USB 3.0 ports
VGA Port	One video port
Liquid Cooling Hoses	Hoses which circulate coolant between the chassis and an external Coolant Distribution Unit (CDU)

Feature	Description
USB Ports	Two USB 3.0 ports
VGA Port	One video port
Liquid Cooling Hoses	Hoses which circulate coolant between the chassis and an external Coolant Distribution Unit (CDU)

Drive Bay Locations

Bay	Description
0–7	Eight hot-swap 2.5" NVMe drive bays
8–9	Two serviceable NVMe M.2 slots

Expansion Slot Locations

Slot	Description
11	PCIe 5.0 x16 (low profile) from PLX switch (North-South)
12	PCIe 5.0 x16 (low profile) from PLX switch (North-South)

Rear Features

Feature	Description
Power Supplies	Four redundant 6600 W Titanium level power supplies
RJ45 Ports	Two 10G RJ45 ports
IPMI Port	One dedicated IPMI port

Expansion Slot Locations

Slot	Description
1	PCIe 5.0 x16 (low profile) from PLX switch Note: Slot 1 is PCIe 5.0 x16 (with x8 bandwidth).
2–9	PCIe 5.0 x16 (low profile) from PLX switch linked to GPUs Note: Slots 2–9 are for East-West backend NICs.
10	PCIe 5.0 x16 (low profile) from PLX switch

PCIe Tray Components

Feature	Description
0	One BMC/IPMI port Two 10G RJ45 ports
1–10	Ten PCIe 5.0 x16 slots Note: Slot 1 is PCIe 5.0 x16 (with x8 bandwidth), and slots 2–9 are for East-West backend NICs.