

UP Storage SuperServer SSG-110P-NTR10

1U UP front-loading storage server with 10 hot-swap 2.5" NVMe bays and PCIe 4.0



More details here

Key Applications

Virtualization, Cloud Computing, All Flash Storage, CDN Optimized,


Key Features

- Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors. Up to 270W TDP.;
- 8 DIMMs; Supports 3DS DDR4-3200: RDIMM/LRDIMM/Intel® Intel® DCPMM;
- 1 PCIe 4.0 x16 (FHHL) slot;
- Intel® Ethernet Controller X550 2x 10GbE RJ45;
- 10x Hot-swap 2.5" All NVMe Gen 4 tool-less drive bays; Onboard 2x NVMe Gen 3/SATA M.2;
- Redundant Platinum 860W Power Supply;




Form Factor	1U Rackmount Enclosure: 437 x 43 x 597mm (17.2" x 1.7" x 23.5") Package: 610 x 203 x 813mm (24" x 8" x 32")
Processor	Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache
System Memory	Slot Count: 8 DIMM slots Max Memory (1DPC): Up to 2TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 10 bays • 10 front hot-swap 2.5" PCIe 4.0 NVMe drive bays M.2: 2 M.2 PCIe 3.0 x4 NVMe/SATA slots (M-key 2280/22110; VROC required for RAID)
Expansion Slots	Default • 1 PCIe 4.0 x16 FHHL slot
On-Board Devices	NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Network Connectivity: 2 RJ45 10GbE with Intel® X550
Input / Output	LAN: 2 RJ45 1 GbE LAN ports 1 RJ45 1 GbE Dedicated BMC LAN port (IPMI shared on LAN port 1) USB: 2 USB 2.0 ports(header) 2 USB 3.2 Gen1 Type-A ports(rear) 2 USB 2.0 Type-A ports(rear) 2 USB 3.2 Gen1 Type-A ports(front) 1 USB 3.2 Gen1 Type-A port Video: 1 VGA port Serial: 1 COM port(Rear) 1 COM port(Header) DOM: 2 Super DOM (Disk on Module) portswith built-in power TPM: 1 TPM header

(Front View – System)

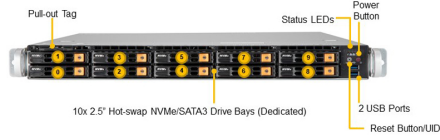

(Rear View – System)

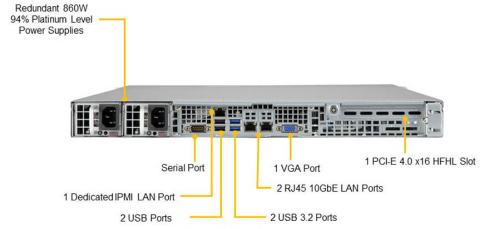

System Cooling	Fans: Up to 6 Counter-rotating PWM 40x40x56mm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 860W Redundant (1 + 1) Platinum Level (94%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7+1 Phase-switching voltage regulator module (VRM) Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 38 lbs (17.24 kg) Net Weight: 25 lbs (11.34 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<u>Super X12SPO-NTF</u>
Chassis	CSE-116TS-R860CBP-N10