

Storage SuperServer SSG-641E-E1CR36L

4U front/rear-loading storage server with 36 hot-swap 3.5" SAS/SATA bays (6 optional NVMe hybrid) and PCIe 5.0



More details here

Key Applications

Enterprise Server, iSCSI SAN, HPC, Data Center, Database Processing & Storage, Corporate Database, Appliance Optimized Storage Building Blocks,

Key Features

- Dual Socket E (LGA-4677) 5th/4th Gen Intel® Xeon® Scalable processors;
- Up to 4TB 3DS ECC RDIMM, DDR5-5600MT/s(1DPC) in 16 DIMM slots;
- 2x 10 GbE onboard via Broadcom BCM57416
 - 1x GbE Dedicated LAN for server remote management: IPMI 2.0 / KVM over LAN / Media over LAN;
- 36x 3.5"/2.5" Hot-swap SAS3/SATA3 drives, 2x Rear 2.5" SATA Slots, 2x NVMe M.2 (form factor: 2280 and 22110);
- 7x 8cm hot-swap counter-rotate redundant PWM cooling fans;
- 1600W Redundant Power Supplies Titanium Level (96%);
- HBA Controller support via Broadcom® 3808;




Form Factor	4U Rackmount Enclosure: (17.2" x 7" x 27.5") Package: (27" x 15" x 39")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	<p>Default: Total 38 bays</p> <ul style="list-style-type: none"> • 12 rear hot-swap 3.5" SAS/SATA drive bays • 24 front hot-swap 3.5" SAS/SATA drive bays • 2 rear hot-swap 2.5" SATA drive bays <p>Option A: Total 6 bays</p> <ul style="list-style-type: none"> • 6 front hot-swap 3.5" PCIe 5.0 x4 NVMe* drive bays <p>(*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details)</p> <p>M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)</p>
Expansion Slots	<p>Default</p> <ul style="list-style-type: none"> • 4 PCIe 5.0 x16 (in x16) LP slots • 2 PCIe 5.0 x8 (in x8) LP slots
On-Board Devices	<p>Chipset: Intel® C741</p> <p>Network Connectivity: 2 RJ45 10GbE with Broadcom® BCM57416</p>
Input / Output	<p>LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GbE LAN ports (Broadcom® BCM57416) (IPMI shared on LAN port 1)</p> <p>USB: 4 USB 3.0 ports(rear)</p> <p>Video: 1 VGA port(Rear)</p> <p>Serial: 1 COM port(Rear)</p> <p>TPM: 1 TPM header</p>

(Front View – System)



Location	Description
1 - 22	24 Hot-swap 3.5" SATA3/SAS3 Drive Bays
23 - 26	6 NVMe Drive Bays (optional)

(Rear View – System)

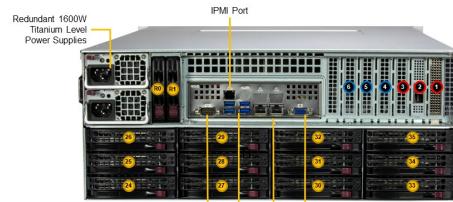

Drive Bay	Description
27 - 38	12 Hot-swap 3.5" SATA3/SAS3 Drive Bays
39 - 40	2 Hot-swap 2.5" SATA3 Drive Bays

Slot Description
PCIe 5.0 x8 (occupied by 3808 or 3808 SAS controller)
PCIe 5.0 x16 (occupied by AOM for external SAS)
PCIe 5.0 x16
PCIe 5.0 x8

System Cooling

Fans: Up to 7 Heavy Duty 8cm Fan(s)
 Air Shroud: 1 Air Shroud

Power Supply

2x 1600W Redundant Titanium Level (96%) Hot-plug power supplies

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: 7+1 Phase-switching voltage regulator
 Monitors for CPU Cores, Chipset Voltages, Memory
 FAN: Fans with tachometer monitoring
 Pulse Width Modulated (PWM) fan connectors
 Status monitor for speed control
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 102.5 lbs (46.4 kg)
 Net Weight: 65.5 lbs (29.7 kg)
 Available Color: Silver

Operating Environment

RoHS Compliant
 Operating Temperature: 10°C to 35°C (50°F to 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% (Non-Condensing)
 Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

Motherboard

[Super X13DEI-T](#)

Chassis

CSE-847BTS-R1K68LPBP5