

# IoT SuperServer SYS-110D-14C-FRAN8TP

Intel Xeon Processor, 14-Core, 800W redundant Platinum Level PWS, 1U edge platform



More details here

## Key Applications



Intel® QuickAssist Technology, Networking Security Appliance,

## Key Features

- Intel® Xeon® Processor D-2766NT, CPU TDP 97W;
- Up to 256GB Registered ECC RDIMM, DDR4-2667MHz; Up to 512GB LRDIMM LRDIMM, DDR4-2667MHz, in 4 DIMM slots;
- 2x Internal 2.5" drive bays(2x PCIe 4.0 NVMe x8 SlimSAS and 1x OCuLink options);
- 4x GbE, 2x 25G SFP28 and 2x 10G Base-T;
- 1x M.2 M-Key 2242/2280 (SATA/PCIe 3.0 x4);
- 5x 40x56mm Hot-swap Counter-rotation PWM Fans;
- Redundant 800 W, 100-240 Vac;



<b>Form Factor</b>	1U Rackmount Enclosure: 437 x 43 x 399mm (17.2" x 1.7" x 15.7") Package: 680 x 200 x 605mm (26.7" x 7.9" x 23.8")
<b>Processor</b>	Single FCBGA-2579 Intel® Xeon® Processor D-2700 Series
<b>GPU</b>	Max GPU Count: Up to 1 double-width or 1 single-width GPU Supported GPU: NVIDIA PCIe: L4 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect
<b>System Memory</b>	Slot Count: 4 DIMM slots Max Memory (1DPC): Up to 256GB/512GB 2667MT/s ECC DDR4 RDIMM/LRDIMM
<b>Drive Bays Configuration</b>	Default: Total 2 bays <ul style="list-style-type: none"> <li>• 2 internal fixed 2.5" SATA drive bays</li> </ul> M.2: 1 M.2 PCIe 3.0 x4 NVMe/SATA slot (M-key 2242/2280)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 1 PCIe 4.0 x16 FHFL slot</li> </ul>
<b>On-Board Devices</b>	SATA: SATA (6Gbps) Network Connectivity: 4 RJ45 1GBASE-T with Intel® I350 2 SFP28 25GbE with Intel® SoC 2 RJ45 10GBASE-T with Intel® X550
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 4 RJ45 1 GbE LAN ports (Intel® I350) 2 RJ45 10 GbE LAN ports (Intel® X550) 2 SFP28 25 GbE LAN ports (Intel® SOC) USB: 2 ports Video: 1 VGA port

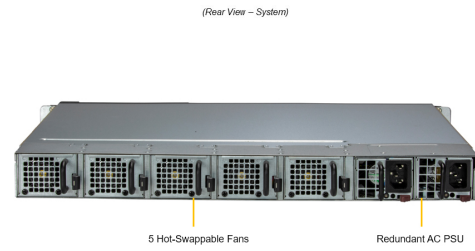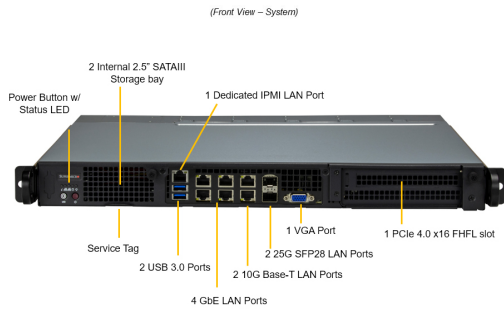

System Cooling	Fans: Up to 5 Counter-rotating, Hot-swappable 40x40x56mm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 800W Redundant (1 + 1) Platinum Level (94%) power supplies
Management	SuperCloud Composer <sup>®</sup> ; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor <sup>®</sup> 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: CPU thermal trip support, PEPI Monitoring for CPU and chassis environment
Dimensions and Weight	Weight: Gross Weight: 29 lbs (13.15 kg) Net Weight: 18 lbs (8.16 kg) Available Color: Silver
Operating Environment	Operating Temperature: 0°C to 40°C (32°F to 104°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super X12SDV-14C-SPT8F</a>
Chassis	CSE-515M-R000NP2