

# Hyper A+ Server AS -1115HS-TNR

1U UP Hyper with 8 hot-swap 2.5" drive bays and 3 PCIe 5.0 slots



More details here

## Key Applications

Virtualization, Software-defined Storage, AI Inference and Machine Learning, Cloud Computing, Enterprise Server,

## Key Features

- Single AMD EPYC™ 9004/9005\* Series Processor  
(\*AMD EPYC™ 9005 series drop-in support requires board revision 2.x);
- Support up to DDR5 24 DIMM slots (2DPC)  
(Please check System Memory Section for detail);
- 2 PCIe 5.0 x16 FHFL slots  
1 PCIe 5.0 x16 FHHL slot  
Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible);
- 8 Hot-swap 2.5" NVMe/SATA/SAS drive bays  
Optional 4 Hot-swap 2.5" NVMe/SAS/SATA drive support via additional parts  
2 M.2 PCIe 3.0 NVMe slots;
- Dual 1200W Redundant Titanium Level power supplies  
(Power supply full redundancy based on configuration and application load);



Form Factor	1U Enclosure: 437 x 43 x 747mm (17.2" x 1.7" x 29.4") Package: 605 x 206 x 1032mm (23.8" x 8.1" x 40.6")
Processor	Single processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x) Up to 192C/320T
GPU	Max GPU Count: Up to 1 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: H100, L4, L40S, RTX 4000 Ada Generation CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (2DPC): Up to 6TB 4000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (1DPC): Up to 3TB 5200MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (2DPC): Up to 6TB 4400MT/s ECC DDR5 1R RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (2DPC): Up to 6TB 4000MT/s ECC DDR5 2R RDIMM (AMD EPYC™ 9005 Series Processor)
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> Option A: Total 12 bays <ul style="list-style-type: none"> <li>• 12 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays</li> </ul> (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 PCIe 3.0 x4 NVMe slot (M-key 22110(default)/2280) 1 M.2 PCIe 3.0 x2 NVMe slot (M-key 22110(default)/2280)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x16 FHHL slot</li> <li>• 2 PCIe 5.0 x16 FHFL slots</li> <li>• 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)</li> </ul>
On-Board Devices	Chipset: AMD System on Chip Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port

USB: 2 USB 3.0 ports(rear)  
1 USB 3.0 port(front)  
Video: 1 VGA port

---


(Front View – System)



Drive Bay	Description
1-8	8 Hot-swap 2.5" NVMe/SAS/SATA Drive Bays
9-12	4 Hot-swap 2.5" SAS/SATA Drive Bays* (optional)

\* NVMe/SAS/SATA functionality depends on configuration chosen and may require additional parts from the optional parts list  
 \* Drive bays and backplane optional for drive slots 9-12, see optional parts list

(Rear View – System)

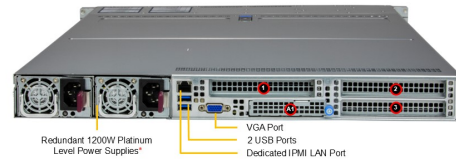

Slot	Slot Description
1	PCIe 5.0 x16 FH (6.6" L)
2	PCIe 5.0 x16 FH (10.5" L)
3	PCIe 5.0 x16 FH (10.5" L)
4	PCIe 5.0 x16 AIOM (OCP 3.0)

\* Full redundancy based on configuration and application load

System Cooling	Fans: Up to 8 counter-rotating 40x40x56mm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 1200W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM BIOS Features: ACPI 6.4 Plug and Play (PnP) SMBIOS 3.5 or later UEFI 2.8 USB Keyboard support
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); OOB Management Package (SFT-OOB-LIC ); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: System temperature, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, CPU thermal trip support
Dimensions and Weight	Weight: Gross Weight: 51 lbs (23.1 kg) Net Weight: 32 lbs (14.5 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super H13SSH</a>
Chassis	<b>CSE-HS119-R1K24P2-A</b>