

Hyper A+ Server AS -2115HS-TNR

2U UP Hyper with 24 hot-swap 2.5" drive bays and 1 PCIe 5.0 slot



More details here

Key Applications

Virtualization, Software-defined Storage, AI Inference and Machine Learning, Cloud Computing, Enterprise Server,

Key Features

- Single AMD EPYC™ 9004/9005* Series Processor
(*AMD EPYC™ 9005 series drop-in support requires board revision 2.x);
- Support up to DDR5 24 DIMM slots (2DPC)
(Please check System Memory Section for detail);
- Optional PCIe slot configurations up to 8 PCIe 5.0 x8 or 4 PCIe 5.0 x16 slots or mix and match
Flexible networking options with 1 AIOM networking slot (OCP NIC 3.0 compatible);
- 24 Hot-swap 2.5" NVMe/SATA/SAS drive bays
2 M.2 PCIe 3.0 NVMe slots;
- Dual 1600W Redundant Titanium Level power supplies
(Power supply full redundancy based on configuration and application load);



| | |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Form Factor | 2U Enclosure: 437 x 88.9 x 760mm (17.2" x 3.5" x 29.9") Package: 605 x 263 x 1107mm (23.8" x 10.4" x 43.6") |
| Processor | Single processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x) Up to 160C/320T |
| GPU | Max GPU Count: Up to 2 double-width GPUs Supported GPU: NVIDIA PCIe: RTX 6000 Ada Generation, RTX A6000 CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe |
| System Memory | Slot Count: 24 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (2DPC): Up to 6TB 4000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (1DPC): Up to 3TB 5200MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (2DPC): Up to 6TB 4400MT/s ECC DDR5 1R RDIMM (AMD EPYC™ 9005 Series Processor) Max Memory (2DPC): Up to 6TB 4000MT/s ECC DDR5 2R RDIMM (AMD EPYC™ 9005 Series Processor) |
| Drive Bays Configuration | Default: Total 24 bays <ul style="list-style-type: none"> • 24 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 PCIe 3.0 x4 NVMe slot (M-key 22110(default)/2280) 1 M.2 PCIe 3.0 x2 NVMe slot (M-key 22110(default)/2280) |
| Expansion Slots | Default <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) Option A* <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHFL double-width slot • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) Option B* <ul style="list-style-type: none"> • 2 PCIe 5.0 x8 (in x16) FHFL slots • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) Option C* <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHFL double-width slots • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) Option D* <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 FHFL double-width slot |

- 2 PCIe 5.0 x8 (in x16) FHFL slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)

Option E*

- 4 PCIe 5.0 x8 (in x16) FHFL slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)

Option F*

- 4 PCIe 5.0 x16 FHFL double-width slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)

Option G*

- 3 PCIe 5.0 x16 FHFL double-width slots
- 2 PCIe 5.0 x8 (in x16) FHFL slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)

Option H*

- 2 PCIe 5.0 x16 FHFL double-width slots
- 4 PCIe 5.0 x8 (in x16) FHFL slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)

Option I*

- 1 PCIe 5.0 x16 FHFL double-width slot
- 6 PCIe 5.0 x8 (in x16) FHFL slots
- 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)


On-Board Devices

Via AIOM

Input / Output


LAN: 1 RJ45 1 GbE Dedicated BMC LAN port
 USB: 2 USB 3.0 ports(rear)
 Video: 1 VGA port

(Front View – System)

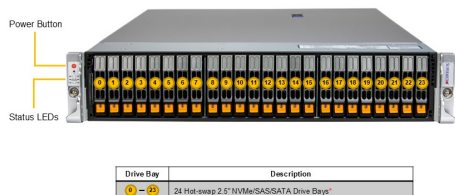

*NVMe/SAS/SATA functionality depends on configuration chosen and may require additional parts from the optional parts kit

(Rear View – System)

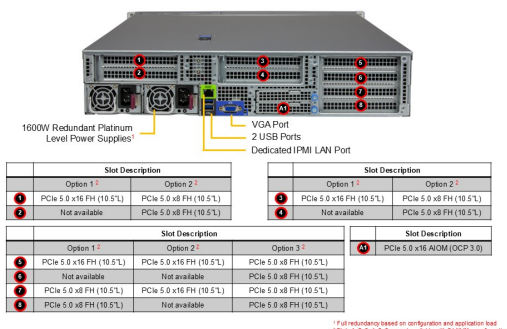

1 Full redundancy based on configuration and application load
 2 Slots 1, 2, 3, 4, 5 are not available with 24 drive configuration
 3 Slots 1, 2, 3, 4, 5 are not available with 25 drive configuration

| | |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Cooling | Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud |
| Power Supply | 2x 1600W Redundant (1 + 1) Titanium Level (96%) power supplies |
| System BIOS | BIOS Type: AMI 32MB SPI Flash EEPROM BIOS Features: ACPI 6.4 Plug and Play (PnP) SMBIOS 3.5 or later UEFI 2.8 USB Keyboard support |
| Management | SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); OOB Management Package (SFT-OOB-LIC); SuperServer Automation Assistant (SAA) New! |
| PC Health Monitoring | Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors Voltage: System temperature, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, CPU thermal trip support |
| Dimensions and Weight | Weight: Gross Weight: 72 lbs (32.7 kg) Net Weight: 39 lbs (17.7 kg) Available Color: Black front & silver body |
| Operating Environment | Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing) |
| Motherboard | Super H13SSH |
| Chassis | CSE-HS219-R1K63P-A |