

# MicroCloud A+ Server AS -3015MR-H8TNR-01-G2



More details here

3U 8-Node MicroCloud with single-width GPU support

## Key Applications

Hosting & Cloud Gaming


## Gold Configuration Details

- CPU: 1x AMD EPYC™ 4565P (16C/4.3GHz) per node
- Memory: 64GB DDR5-5600 per node
- Storage: 2x 1.92TB U.2 NVMe SSD per node
- NIC: 2-port 10GbE/25GbE AOC per node
- Power: 2x 2200W Titanium Level




## Base System Specs

Form Factor	3U Rackmount Enclosure: 438 x 132 x 589mm (17.26" x 5.21" x 23.2") Package: 667 x 295.91 x 863.6mm (26.26" x 11.65" x 34")
Processor	Single Socket AM5 (LGA-1718) AMD EPYC™ 4005/4004 Series Processor Up to 16C/32T; Up to 128MB Cache
GPU	Max GPU Count: Up to 1 single-width GPU Supported GPU: NVIDIA PCIe: A2, L4, T4
System Memory	Slot Count: 4 DIMM slots Max Memory (1DPC): Up to 192GB 5600MT/s ECC/non-ECC DDR5 UDIMM Max Memory (2DPC): Up to 192GB 3600MT/s ECC/non-ECC DDR5 UDIMM
Drive Bays Configuration	(*SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 NVMe slot (M-key 2280/22110)
On-Board Devices	NVMe: NVMe; (Native) Network Connectivity: No NIC option supported
Input / Output	USB: 2 USB 2.0 ports 1 Type-C port(front) Video: 1 port TPM: 1 TPM Onboard/port 80

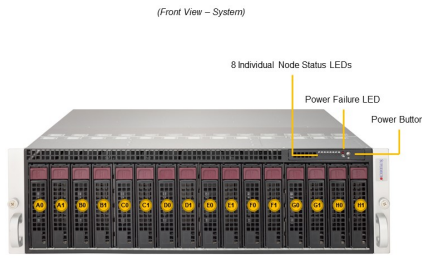

Drive Bay (node A-F)	Description
	2 Hot-swap 2.5" NVMe Drive Bays (per node)

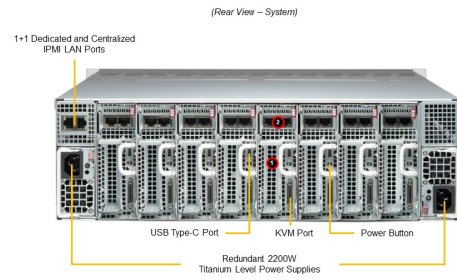

Slot Description
PCIe 5.0 x8 (in x16) LP
PCIe 4.0 x8 Micro LP

\*Supports single-port 1GbE/10GbE LAN cards

System Cooling	Fans: Up to 4 Heavy Duty 8cm Fan(s) Air Shroud: 8 Air Shrouds
Power Supply	2x 2200W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 3-Phase-switching voltage regulator with auto-sense from 0.5V-2.3V Monitors for CPU Cores, +3.3V, +5V, +12V, +3.3V Standby, +5V Standby, VBAT, Memory, Chipset Voltages. Fan: Fan speed control, Dual Cooling Zone Temperature: Monitoring for CPU and chassis environment
Dimensions and Weight	Weight: Gross Weight: 88 lbs (39.92 kg) Net Weight: 62.2 lbs (28.21 kg) Available Color: N/A
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	<a href="#"><b>Super H13SRD-F</b></a>
Chassis	<b>CSE-938NH-R2K20BP2</b>