

Storage SuperServer SSG-620P-ACR12L

2U front-loading storage server with 12 hot-swap 3.5" hybrid SAS/SATA bays and PCIe 4.0



More details here

Key Applications


Enterprise Server, iSCSI SAN, HPC, Data Center, Database Processing & Storage, Corporate Database,

Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- 16 ECC DDR4-3200: LRDIMM/RDIMM + 2 Intel® Optane™ Persistent Memory Dedicated Slots;
- 2x 10GbE;
- 12x 3.5" hot-swap hybrid SATA/SAS drive bays (4 NVMe Hybrid Ports); 2 rear SATA 2.5" slots; onboard 1 M.2 NVMe;
- 3 heavy duty fans with optimal fan speed control; 1 Air Shroud;
- Broadcom® 3816 Controller;



Form Factor	2U Rackmount Enclosure: (17.3" x 3.5" x 25.5") Package: (27" x 12" x 35")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 38C/76T; Up to 57MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 14 bays <ul style="list-style-type: none">• 8 front hot-swap 3.5" SAS/SATA drive bays• 4 front hot-swap 3.5" NVMe*/SAS/SATA drive bays• 2 rear hot-swap 2.5" SAS*/SATA drive bays (*NVMe/SAS support may require additional storage controller and/or cables) M.2: 1 M.2 NVMe slot (M-key)
Expansion Slots	Default <ul style="list-style-type: none">• 4 PCIe 4.0 x16 LP slots• 1 PCIe 4.0 x8 LP slot
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GBASE-T LAN ports USB: 4 USB 3.0 ports(rear) Video: 1 VGA port DOM: 2 SuperDOM (Disk on Module) ports

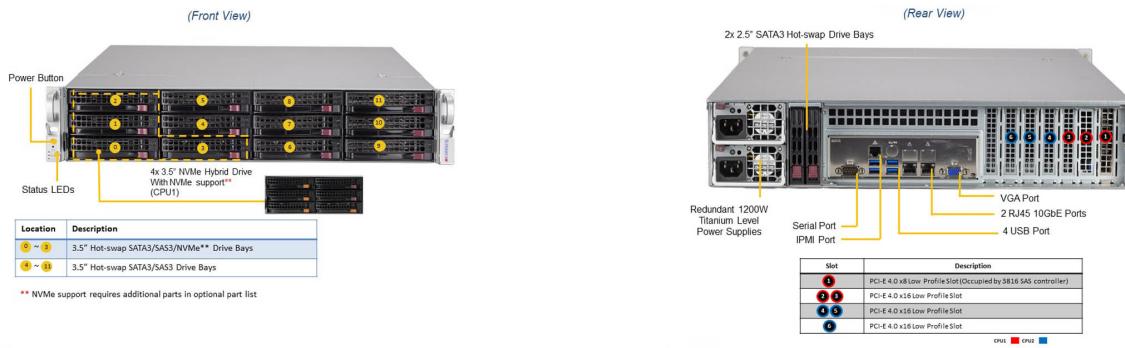

System Cooling

Fans: Up to 3 Heavy Duty 8cm Fan(s)
 Air Shroud: 1 Air Shroud

Power Supply

2x 1200W Redundant Titanium Level (96%) Hot-plug power supplies

System BIOS

BIOS Type: AMI 128MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: 4+1 Phase-switching voltage regulator
 Monitors for CPU Cores, Chipset Voltages, Memory
 FAN: Fans with tachometer monitoring
 Pulse Width Modulated (PWM) fan connectors
 Status monitor for speed control
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 61 lbs (27.7 kg)
 Net Weight: 34 lbs (15.4 kg)
 Available Color: Black

Operating Environment

RoHS Compliant
 Operating Temperature: 10°C to 35°C (50°F to 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% ()
 Non-operating Relative Humidity: 5% to 95% ()

Motherboard

[Super X12DPi-NT6](#)

Chassis

[CSV-826BTS-R1K23LPBP2](#)