

# Storage SuperServer SSG-640P-E1CR24H

4U front-loading storage server with 24 hot-swap 3.5" SAS/SATA bays (SAS hardware RAID) and PCIe 4.0



More details here

## Key Applications


Enterprise Server, iSCSI SAN, HPC, Data Center, Database Processing & Storage, Corporate Database, Appliance Optimized Storage Building Blocks,

## Key Features

- Dual socket 3rd Gen Intel® Xeon® Scalable processors, up to 72 Cores Per Node;
- 16 ECC DDR4-3200: LRDIMM/RDIMM + 2 Intel® Optane™ Persistent Memory Dedicated Slots;
- 2x 10Gbe  
Server remote management: IPMI 2.0 / KVM over LAN / Media over LAN per node;
- 24 3.5"/2.5" Hot-swap SAS3/SATA3 drives, 2x Rear SATA Slots, 1x SATA/NVMe M.2 (form factor: 2280 and 22110);
- 5x 8cm hot-swap counter-rotate redundant PWM cooling fans;
- 1200W Redundant Power Supplies Titanium Level (96%);
- HW RAID support via Broadcom® 3908;



Form Factor	4U Enclosure: 437 x 178 x 660mm (17.2" x 7" x 26") Package: 871 x 673 x 343mm (34.3" x 26.5" x 13.5")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 38C/76T; Up to 57MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 26 bays <ul style="list-style-type: none"> <li>• 24 front hot-swap 3.5" SAS/SATA drive bays</li> <li>• 2 rear hot-swap 2.5" SAS*/SATA drive bays</li> </ul> (*SAS support may require additional storage controller and/or cables) M.2: 1 M.2 NVMe slot (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 3 PCIe 4.0 x16 LP slots</li> <li>• 1 PCIe 4.0 x8 LP slot</li> </ul>
On-Board Devices	2 RJ45 10GBASE-T with Intel® X550
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 4 USB 3.0 ports(rear) Video: 1 VGA port DOM: 2 SuperDOM (Disk on Module) ports

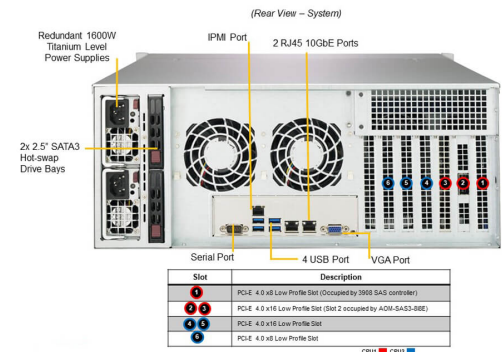

System Cooling	Fans: Up to 5 Heavy Duty 8cm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 1200W Redundant Titanium Level (96%) Hot-plug power supplies
System BIOS	BIOS Type: AMI 128MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 4+1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 118 lbs (53.52 kg) Net Weight: 86 lbs (39 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% ( ) Non-operating Relative Humidity: 5% to 95% ( )
Motherboard	<a href="#">Super X12DPi-NT6</a>
Chassis	<a href="#">CSE-846BE1C-R1K23B</a>