

GPU SuperServer ARS-121L-DNR-LCC

1U 2-Node NVIDIA Grace™ CPU Superchip liquid-cooled system supporting NVIDIA BlueField®-3 or NVIDIA ConnectX®-7 (complete rack and onsite service are required)



Key Applications

High Performance Computing, Hyperscale Cloud Applications, Data Analytics,

Key Features

- Two nodes in a 1U form factor. Each node supports the following:;
- High density processor(s) NVIDIA 144-core CPUs on a Grace™ CPU Superchip with liquid- cooling;
- Up to 960GB onboard memory;
- Up to 2xPCIe 5.0 x16 slots;
- Up to 2xE1.S NVMe drive bays, 2xM.2 NVMe drive;
- 2 Redundant 2000W Titanium Level power supplies;




Form Factor	1U Rackmount Enclosure: 438.4 x 43.6 x 900mm (17.26" x 1.7" x 35.4") Package: 695 x 230 x 1170mm (27.36" x 9.05" x 46.06")
Processor	Single processor(s) NVIDIA Dual 72-core CPUs on a Grace™ CPU Superchip
System Memory	Slot Count: Onboard Memory Max Memory: Up to 960GB ECC
Drive Bays Configuration	Default: Total 2 bays <ul style="list-style-type: none">• 2 front fixed E1.S NVMe drive bays M.2: 2 M.2 NVMe slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none">• 1 PCIe 5.0 x16 FHFL slot• 1 PCIe 5.0 x16 LP slot
On-Board Devices	NVIDIA C2
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 1 port(Rear) Video: 1 mini-DP port

(Front View – System)



Drive Bay	Description
2	Fixed E1.S NVMe Drive Bays

(Rear View – System)

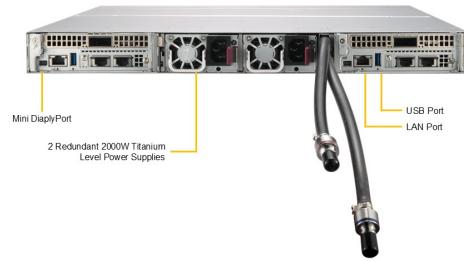

System Cooling
 Fans: Up to 7 Removable heavy-duty 4cm Fan(s)
 Liquid Cooling: Direct to Chip (D2C) Cold Plate

Power Supply 2x 2000W Redundant Titanium Level (96%) power supplies

System BIOS BIOS Type: AMI 64MB SPI Flash EEPROM

PC Health Monitoring
 CPU: Monitors for CPU Cores, Chipset Voltages, Memory
 FAN: Fans with tachometer monitoring
 Status monitor for speed control
 Pulse Width Modulated (PWM) fan connectors
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight
 Weight: Gross Weight: 49.21 lbs (22.32 kg)
 Net Weight: 33.64 lbs (15.26 kg)
 Available Color: Silver

Operating Environment
 Operating Temperature: 10°C to 35°C (50°F to 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% (non-condensing)
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard [Super G1SMH](#)

Chassis [CSE-MG102TS-R000NDFP-2N](#)