

GPU SuperServer ARS-221GL-NHIR

DP NVIDIA GH200 Grace Hopper Superchip system supporting NVIDIA BlueField-3 or NVIDIA ConnectX-7




Key Applications

High Performance Computing, AI/Deep Learning Training and Inference, Large Language Model (LLM) and Generative AI,


Key Features

- High density 2U 1-node GPU system with two Integrated NVIDIA H100 GPUs and two 72-core Arm Neoverse V2 CPUs
NVIDIA® NVLink® high speed interconnect between both GH200 Super Chips;
- NVIDIA Grace™ Hopper Superchip (Grace CPU and H100 GPU);
- NVLink® Chip-2-Chip (C2C) high-bandwidth, low-latency interconnect between CPU and GPU at 900GB/s;
- Up to 1248GB of coherent memory (system as a whole), including 960GB LPDDR5X and 288GB of HBM3e for LLM applications;
- 4x PCIe 5.0 X16 supporting one NVIDIA Bluefield 3 and two connectX-7 cards;
- 6 Heavy Duty Fans with Optional Speed Control;

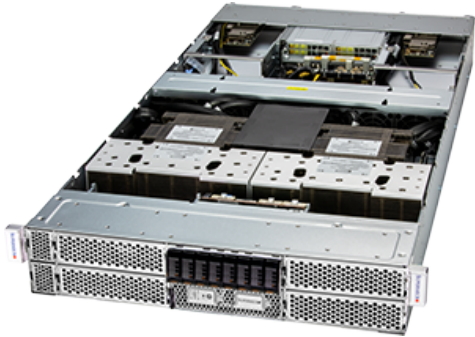


Form Factor	2U Rackmount Enclosure: 438.4 x 87 x 900mm (17.3" x 3.43" x 35.43") Package: 700 x 280 x 1200mm (27.56" x 11.02" x 47.24")
Processor	NVIDIA 72-core NVIDIA Grace CPU on GH200 Grace Hopper™ Superchip
GPU	Max GPU Count: 2 onboard GPUs Supported GPU: NVIDIA: H100 Tensor Core GPU on GH200 Grace Hopper™ Superchip (Air-cooled) CPU-GPU Interconnect: NVIDIA NVLink™-C2C GPU-GPU Interconnect: NVIDIA® NVLink™
System Memory	Slot Count: Onboard Memory Max Memory: Up to 960GB ECC LPDDR5X Additional GPU Memory: Up to 288GB ECC HBM3e
Drive Bays Configuration	Default: Total 3 bays <ul style="list-style-type: none"> • 3 front fixed E1.S NVMe drive bays M.2: 2 M.2 NVMe slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> • 3 PCIe 5.0 x16 (in x16) FHFL slots • 1 PCIe 5.0 x4 (in x16) FHFL slot
On-Board Devices	System on Chip
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 1 port(Rear) Video: 1 mini-DP port

(Front View – System)

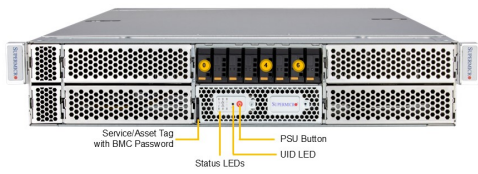

Drive Bay	Description
	3 Fixed E.S.NVMe Drive Bays

(Rear View – System)

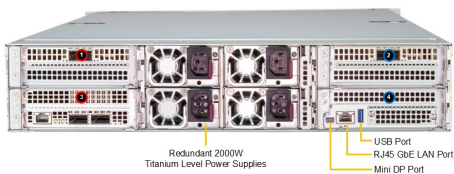

Slot	Slot Description
	PCIe 5.0 x16 FHFL

System Cooling	Fans: Up to 6 Removable heavy-duty 6cm Fan(s)
Power Supply	4x 2000W Redundant (2 + 2) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB UEFI
PC Health Monitoring	<p>CPU: Monitors for CPU Cores, Chipset Voltages, Memory</p> <p>FAN: Fans with tachometer monitoring</p> <p>Status monitor for speed control</p> <p>Pulse Width Modulated (PWM) fan connectors</p> <p>Temperature: Monitoring for CPU and chassis environment</p> <p>Thermal Control for fan connectors</p>
Dimensions and Weight	<p>Weight: Gross Weight: 103 lbs (46.8 kg)</p> <p>Net Weight: 88 lbs (40 kg)</p> <p>Available Color: Silver</p>
Operating Environment	<p>Operating Temperature: 10°C to 35°C (50°F to 95°F)</p> <p>Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)</p> <p>Operating Relative Humidity: 8% to 90% (non-condensing)</p> <p>Non-operating Relative Humidity: 5% to 95% (non-condensing)</p>
Motherboard	Super G2DMH-G1
Chassis	CSE-MG202TS-R000NDFP