

# IoT SuperServer AS -E300-14GR

Mini-1U embedded system with AMD EPYC™ 4004/4005 Series Processor up to 65W TDP



## Key Applications

Healthcare, Surveillance Security Server, AI Inference, Digital Signage / PoS,

## Key Features

- Single AMD EPYC™ 4004/4005 Series Processors up to 65W with air cooling;
- Support for PCIe GPU accelerator cards;
- Up to 4 DIMMs supporting up to 192GB DDR5-5600 UDIMM;
- Up to 1 PCIe 5.0 x16 LP slots;
- Up to 1 internal fixed 2.5" SATA drive bays;
- Fan-based Embedded chassis with 8.89" (225.8mm) depth;




<b>Form Factor</b>	Fan-based Embedded Enclosure: 264.8 x 43 x 225.8mm (10.43" x 1.69" x 8.89") Package: 381 x 276 x 142mm (15" x 10.87" x 5.59")
<b>Processor</b>	Single Socket AM5 (LGA-1718) AMD EPYC™ 4005/4004 Series Processor 16C/32T; 64MB Cache
<b>System Memory</b>	Slot Count: 4 DIMM slots Max Memory (1DPC): 192GB 5600MT/s ECC/non-ECC DDR5 UDIMM
<b>Drive Bays Configuration</b>	Default: Total 1 bay <ul style="list-style-type: none"> <li>• 1 internal fixed 2.5" SATA* drive bay</li> </ul> (*SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 PCIe 5.0 x4 NVMe slot (M-key 2280) 1 M.2 PCIe 5.0 x4 NVMe slot (M-key 22110)
<b>Expansion Slots</b>	Default* <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x16 (in x16) LP slot</li> </ul> (*Requires additional parts, please see the optional parts list for details. For more details on PCIe slot configuration options, please refer to the system callout images above.)
<b>On-Board Devices</b>	AMD B650
<b>Input / Output</b>	LAN: 4 RJ45 1 GbE LAN ports (Intel® I350-AM4) 1 RJ45 1 GbE Dedicated BMC LAN port (ASPEED AST2600) USB: 1 USB 3.2 Gen2 Type-C port(Rear) 2 USB 3.2 Gen2 Type-A ports(Rear) 1 USB 3.2 Gen1 Type-A port(Rear) Video: 1 HDMI 2.1 port(Rear) 1 Mini-DP port(Rear) TPM: 1 TPM header 1 TPM Onboard/port 80

(Front View – System)



(Rear View – System)

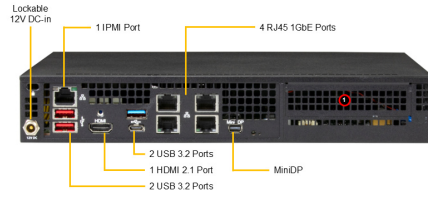

Slot	Slot Description
1	PCIe 5.0 x16 LP

System Cooling	Fans: Up to 1 CPU heatsink with 70x70x15mm Fan(s) Up to 2x 4-PIN PWM 40x40x28mm Fan(s)
Power Supply	1x 180W power supply
System BIOS	BIOS Type: AMI 32MB UEFI BIOS Features: ACPI 6.5 SMBIOS 3.7 or later UEFI 2.9
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; Plug-ins for 3rd Party Software
PC Health Monitoring	Fan: Status monitor for speed control
Dimensions and Weight	Weight: Gross Weight: 7.5 lbs (3.4 kg) Net Weight: 3.7 lbs (1.6 kg) Available Color: Black
Operating Environment	Operating Temperature: 0°C to 40°C (32°F to 104°F) with 0.7 m/s airflow Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><b>Super H14SRV-HLN4F</b></a>
Chassis	<b>CSE-E300</b>