

# GrandTwin A+ Server AS -2115GT-HNTR-01-G2

2U 4-Node GrandTwin with up to 6 hot-swap 2.5" NVMe/SATA drives per node and rear I/O



More details here

## Key Applications

Web Application/Storage


## Gold Configuration Details

- CPU: 1x AMD EPYC 9534 (64C/2.45GHz) per node
- Memory: 512GB DDR5-4800 per node
- Storage: 1x 960GB 2.5" SATA SSD per node
- NIC: 1x dual 100GbE QSFP28 per node
- Power: 2x 2200W Titanium Level



## Base System Specs

Form Factor	2U Rackmount Enclosure: 449 x 88 x 711.2mm (17.67" x 3.46" x 28") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28")
Processor	Single processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x) Up to 160C/320T
System Memory	Slot Count: 12 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor, MB R1.x/R2.0/R2.01) Max Memory (1DPC): Up to 3TB 6000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor, MB R2.0) Max Memory (1DPC): Up to 3TB 6400MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor, MB R2.01)
Drive Bays Configuration	2 M.2 NVMe/SATA slots (M-key)
On-Board Devices	Chipset: AMD SP5 Network Connectivity: Via IO Module
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports Video: 1 VGA port

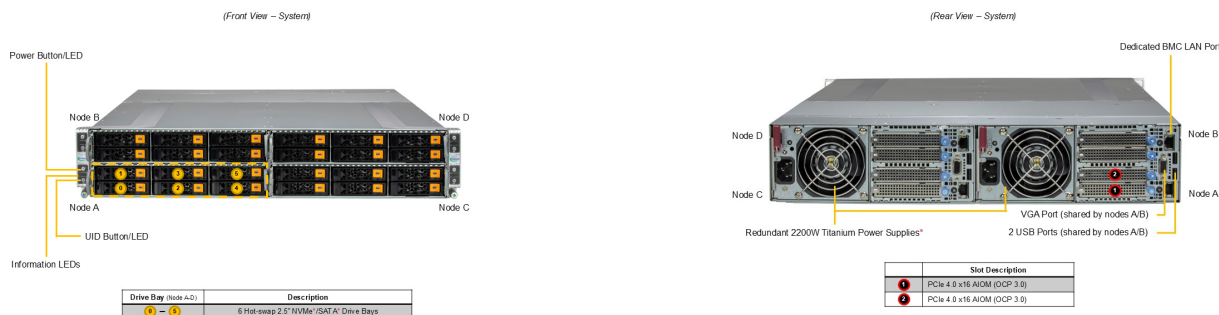

\*NVMe/SATA functionality depends on configuration chosen. Additional parts are required

\*All redundancy based on configuration and application load

System Cooling	Fans: Up to 2x 17.6K RPM Heavy Duty 8cm Fan(s) Air Shroud: 1 per node Air Shroud
Power Supply	2x 2200W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB Flash ROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Voltage: Voltage, VBAT, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, VRM temperature, CPU thermal trip support, 1.8V standby
Dimensions and Weight	Weight: Gross Weight: 88 lbs (39.9 kg) Net Weight: 68 lbs (30.8 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	<a href="#">Super H13SST-G</a>
Chassis	CSE-GT214BC-R2K21BP