

Storage SuperServer SSG-121E-NE3X12R

1U front-loading all-flash storage server with 8 E3.S NVMe drives and 4 E3.S 2T CXL bays



More details here

Key Applications

Software-defined Storage, In-Memory Computing, Data Intensive HPC, Private & Hybrid Cloud, NVMe Over Fabrics Solution,

Key Features

- Dual Socket E (LGA-4677) 5th Generation Intel® Xeon® Scalable processors. Up to 270W TDP.;
- Supports 32 DIMMs with 2DPC, up to 8TB memory capacity with 32 DIMMs of 256GB 3DS RDIMM DDR5-4800 ECC memory;
- Two PCIe 5.0 x16 slots & two AIOM connectors (OCP 3.0 SFF compliant);
- 8x hot-swap E3.S (1T) NVMe drive bays, 4x E3.S(2T) CXL bays;
- Redundant Titanium 1600W Power Supplies;



Form Factor

1U Rackmount
 Enclosure: 438.4 x 43.6 x 773.25mm (17.2" x 1.7" x 30.4")
 Package: 604.774 x 199.898 x 1029.97mm (23.81" x 7.87" x 40.55")

System Memory

Slot Count: 32 DIMM slots

Drive Bays Configuration

Default: Total 12 bays

- 8 front hot-swap E3.S 1T NVMe drive bays
- 4 front fixed E3.S 2T CXL Type 3 drive bays

M.2: 2 M.2 NVMe/SATA slots (M-key 2280/22110)

Expansion Slots

PCI-Express (PCIe) Configuration: Default

- 2 PCIe 5.0 x16 FHHL slots
- 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)

CXL Support: Up to 4 CXL 2.0 x8 Type 3 devices


On-Board Devices

Via AIOM


Input / Output

LAN: 1 RJ45 1 GbE Dedicated BMC LAN port
 USB: 2 USB 3.0 ports(rear)
 2 USB 3.0 ports(front)
 Video: 1 VGA port

(Front View – System)

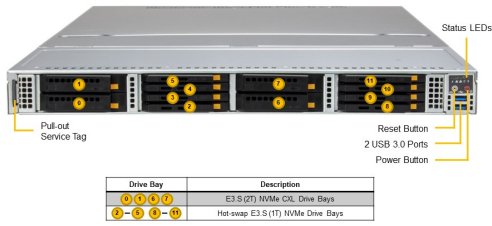

(Rear View – System)

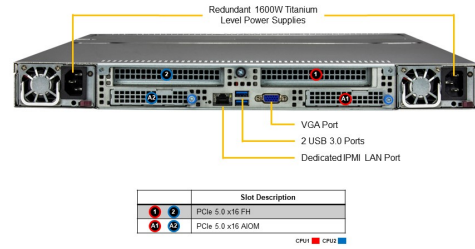

System Cooling	Fans: Up to 8 Heavy Duty 4cm Fan(s) Air Shroud: 2 Air Shrouds
Power Supply	2x 1600W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 68.74 lbs (31.2 kg) Net Weight: 48 lbs (21.8 kg) Available Color: Silver
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% () Non-operating Relative Humidity: 8% to 95% ()
Motherboard	<u>Super X13DSF-A</u>
Chassis	CSE-126E32-R1K62P