Hyper SuperServer SYS-112H-TN-02-G2

1U UP Hyper supporting up to 12 hot-swap 2.5" NVMe/SAS/SATA bays and up to 3 PCIe 5.0 + 1 PCIe 5.0 AIOM slots


More details here

Key Applications

IaaS – Compute/Virtualization Bare Metal

Gold Configuration Details

- CPU: 1x Intel® Xeon® 6731P (32C/2.5GHz)
- Memory: 1TB DDR5-6000
- Storage: 2x 960GB M.2 NVMe SSD
- NIC: 1x quad 25GbE SFP28
- Power: 2x 1200W Titanium Level

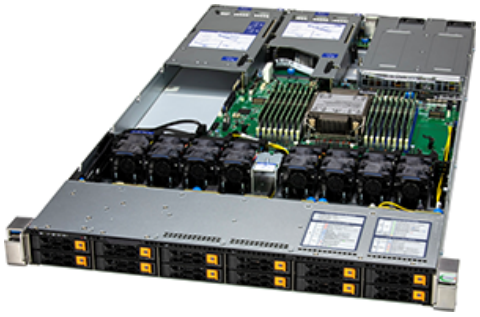


Base System Specs

Form Factor	1U Rackmount Enclosure: 437 x 43 x 778.7mm (17.2" x 1.7" x 30.66") Package: 672 x 224 x 1100mm (26.46" x 8.82" x 43.31")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 86C/172T; Up to 336MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
GPU	Max GPU Count: Up to 1 double-width or 3 single-width GPUs Supported GPU: NVIDIA PCIe: L4, L40S, NVIDIA RTX PRO™ 4000 Blackwell, NVIDIA RTX PRO™ 4500 Blackwell Server Edition Intel PCIe: Intel Data Center GPU Flex 170 CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM Max Memory (1DPC): Up to 512GB 8000MT/s ECC DDR5 MRDIMM Max Memory (2DPC): Up to 4TB 6000MT/s ECC DDR5 RDIMM
Drive Bays Configuration	(*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slots (M-key 2280/22110/25110; VROC required for RAID)
On-Board Devices	NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.2 Gen1 ports (Rear) 1 USB 3.2 Gen1 port (Front) Video: 1 VGA port

©2026 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice

(Front View – System)



Drive Bay	Description
0 – 7	8 Hot-swap 2.5" NVMe/SAS/SATA Drive Bays*

*NVMe, SAS, or SATA support requires additional parts from the optional parts list

(Front View – System)



Drive Bay	Description
0 – 11	12 Hot-swap 2.5" NVMe/SAS/SATA Drive Bays

*NVMe, SAS, or SATA support requires additional parts from the optional parts list

System Cooling	Fans: Up to 8 counter-rotating 40x40x56mm Fan(s) Air Shroud: 1 CPU Air Shroud
Power Supply	2x 1200W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB UEFI
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 41.4 lbs (18.8 kg) Net Weight: 19.2 lbs (8.7 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	**Super X14SBH**
Chassis	**CSE-HS101-R000NFP**

©2026 Copyright Super Micro Computer, Inc. All rights reserved. *Product specifications may change without notice