

# GPU SuperServer SYS-212GB-FNR-01-G2

UP Intel 2U PCIe GPU System with up to 4 NVIDIA RTX PRO™ 6000 Blackwell Server Edition or NVIDIA H200



## Key Applications

SaaS - Agent Flow AI Inference


## Gold Configuration Details

- CPU: 1x Intel® Xeon® 6731P (32C/2.5GHz)
- GPU: 2x NVIDIA RTX PRO™ 6000 Blackwell Server Edition, 96GB GDDR7
- Memory: 512GB DDR5-6400
- Storage: 2x 3.84TB E1.S SSD
- M.2: 1x 960GB M.2 NVMe SSD
- NIC: 1x dual 10GbE RJ45
- Power: 2x 2700W Titanium Level




## Base System Specs

Form Factor	2U Rackmount Enclosure: 438.4 x 87 x 900mm (17.3" x 3.43" x 35.43") Package: 700 x 280 x 1200mm (27.56" x 11.02" x 47.24")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores Up to 80C/160T
GPU	Max GPU Count: Up to 4 double-width GPUs Supported GPU: NVIDIA PCIe: H200 NVL (141GB), NVIDIA RTX PRO™ 6000 Blackwell Server Edition CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: NVIDIA® NVLink™ Bridge (optional)
System Memory	Slot Count: 16 DIMM slots/8 Channels Max Memory (1DPC): Up to 1TB 6400MT/s ECC DDR5 RDIMM Max Memory (1DPC): Up to 512GB 8000MT/s ECC DDR5 MRDIMM Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM
Drive Bays Configuration	2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)
Expansion Slots	2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 1 USB 3.0 Type-A port(Rear) Video: 1 mini-DP port

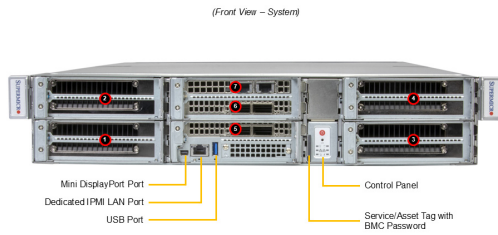

Slot	Description
1 - 2	PCIe 5.0 x16 FHFL Double-width GPU
3 - 4	PCIe 5.0 x16 FHFL Networking DPUs

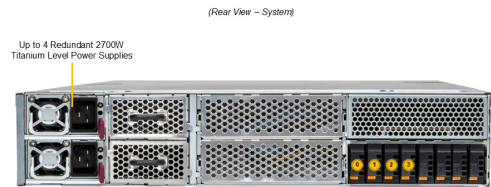

Drive Bay	Description
1 - 4	4 Hot-swap ED8FF E1 S Drive Bays

System Cooling	Fans: 5x 8cm heavy duty fans with optimal fan speed control
Power Supply	2x 2700W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; Plug-ins for 3rd Party Software
PC Health Monitoring	CPU: 8+4 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 84 lbs (38 kg) Net Weight: 66 lbs (30 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (max 21° DP; non-condensing) Non-operating Relative Humidity: 8% to 90% (max 38° DP; non-condensing)
Motherboard	<a href="#"><b>Super X14SBGM</b></a>
Chassis	<b>CSE-MG204-R000NDFP</b>