

# GPU SuperServer SYS-220GP-TNR

DP Intel System with 6 PCIe GPUs



More details here

## Key Applications

Scientific Virtualization, High Performance Computing, VDI, AI/Deep Learning Training,

## Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 16 DIMM Slots; Up to 4TB DRAM; Up to 4TB Intel® Optane™ Persistent Memory (up to 6TB with DRAM) ; 3200/2933/2666 ECC DDR4 LRDIMM;RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 6 PCIe Gen 4.0 x16 FH, 10.5" L  
Up to 2 PCIe Gen 4.0 x8 FH;
- Flexible networking options;
- Total 10x 2.5" Hot-swap drive bays, configurable combination of SATA + NVMe with optional cable, up to 6x NVMe  
Configuration 3: 4x SATA + 6x NVMe  
2x M.2 NVMe for boot drive only (with optional expansion card AOC-SLG3-2M2)  
Configuration 1: 8x SATA + 2x NVMe (PCIe slot 7 + slot 8 enabled)  
Configuration 2: 6x SATA + 4x NVMe (PCIe slot 7 enabled);
- 5 counter rotating fans w/ Optimal Fan Speed Control;



**Form Factor** 2U Rackmounts;  
**Power Supply** Enclosure: 440.7 x 88 x 766.8mm (17.35" x 3.46" x 30.18")  
 Package: 673 x 279 x 1130mm (26.5" x 11" x 44.5")

**Processor** Dual Socket P+ (LGA-4189)  
 3rd Gen Intel® Xeon® Scalable processors  
 Up to 40C/80T; Up to 60MB Cache per CPU

**GPU** Max GPU Count: Up to 6 double-width GPUs  
 Supported GPU:  
 NVIDIA PCIe: H100, A10, A100, A16, A2, A30, A40, L40S, RTX A4000, RTX A4500, RTX A5000, RTX A6000  
 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect  
 GPU-GPU Interconnect: PCIe

**System Memory** Slot Count: 16 DIMM slots  
 Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM  
 Supports Intel® Optane™ persistent memory 200 series


**Drive Bays Configuration** Default: Total 10 bays  
 • 6 front hot-swap 2.5" SAS\*/SATA drive bays  
 • 4 front hot-swap 2.5" NVMe drive bays  
 (\*SAS support may require additional storage controller and/or cables, please see the optional parts list for details)

**Expansion Slots** Default  
 • 6 PCIe 4.0 x16 FH/10.5"L slots  
 • 2 PCIe 4.0 x8 FHFL slots


**On-Board Devices** SATA: SATA (6Gbps) ; RAID 0/1/5/10 support  
 Network Connectivity: Via AIOM

**Input / Output** 1 VGA port

(Front View – System)

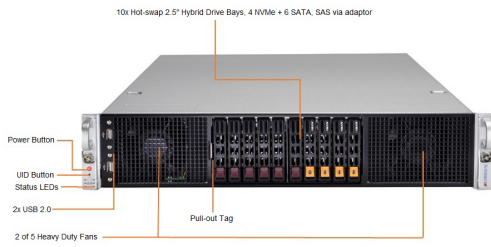

(Rear View – System)

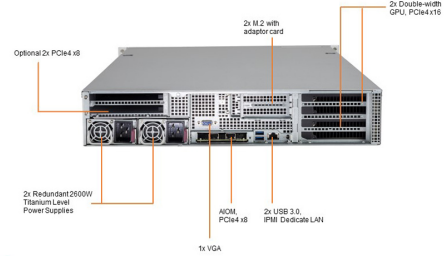

System Cooling	Fans: Up to 5 heavy duty fans with optimal fan speed control
Power Supply	1x 2600W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7 +1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 54 lbs (24.5 kg) Net Weight: 39.5 lbs (17.9 kg) Available Color: Black Front & Silver Body
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><b>Super X12DPG-AR</b></a>
Chassis	<b>CSE-218GH2TS-R2K63BP</b>