

# Twin SuperServer SYS-220TP-HC9TR

2U 4-node TwinPro with 6 2.5" SAS/SATA (HW RAID) drives per node and dual 10GbE



More details here

## Key Applications

High Performance Computing, Hyper-Converged Infrastructure, Big Data / Big Science,

## Key Features


- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following:;
- Dual Socket P+ (LGA-4189) 3rd Generation Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 16 DIMMs, Up to 4TB 3DS ECC DDR4-3200 LRDIMM/RDIMM;
- 1 PCIe 4.0 x16 (LP), 1 PCIe 4.0 x8 (with M.2 adapter installed for support 2 NVME up to 22x80 mm);
- Intel® X710 Dual port 10GbE LAN onboard;
- 6x 2.5" hot-swap SATA/SAS drive bays;
- 4 heavy duty 8cm PWM fans with optimal fan speed control (Per System);
- Two 2200W redundant power supplies with PMBus;
- Broadcom® 3908 SAS (12Gbps); 6 slots per node; RAID 0, 1, 5, 6, 10, 50 support.

ASPEED AST2600 BMC, 2 USB, VGA, RoT;




Form Factor	2U Rackmount Enclosure: 438 x 88 x 730mm (17.25" x 3.47" x 28.75") Package: 622 x 254 x 1143mm (24.5" x 10" x 45")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 32C/64T; Up to 48MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM
Drive Bays Configuration	Default: Total 6 bays • 6 front hot-swap 2.5" SATA drive bays
Expansion Slots	Default • 1 PCIe 4.0 x16 LP slot
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GBASE-T with Intel® X710-AT2
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

(Front View – System)

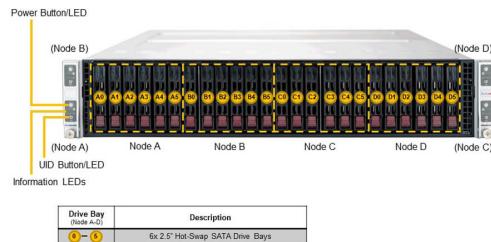

(Rear View – System)

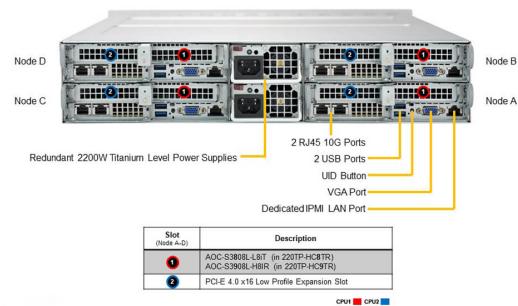**System Cooling**

Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control  
 Air Shroud: 4 Air Shrouds

**Power Supply**

1x 2200W Redundant Titanium Level (96%) power supply

**System BIOS**

BIOS Type: AMI 32MB SPI Flash EEPROM

**Management**

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

**PC Health Monitoring**

CPU: 5 Phase-switching voltage regulator  
 Monitors for CPU Cores, Chipset Voltages, Memory  
 FAN: Fans with tachometer monitoring  
 Pulse Width Modulated (PWM) fan connectors  
 Status monitor for speed control  
 Temperature: Monitoring for CPU and chassis environment  
 Thermal Control for fan connectors

**Dimensions and Weight**

Weight: Gross Weight: 90 lbs (40.9 kg)  
 Net Weight: 72 lbs (32.7 kg)  
 Available Color: Black front & silver body

**Operating Environment**

Operating Temperature: 10°C to 35°C (50°F to 95°F)  
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)  
 Operating Relative Humidity: 8% to 90% (non-condensing)  
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

**Motherboard**

[\*\*Super X12DPT-PT6\*\*](#)

**Chassis**

[\*\*CSV-217HQ+-R2K20BP4\*\*](#)