

# GPU SuperServer SYS-221GE-NR

DP Intel 2U PCIe GPU System with up to 4 NVIDIA H100, H100 NVL, or L40S



More details here

## Key Applications



High Performance Computing, AI/Deep Learning Training, Large Language Model (LLM) Natural Language Processing,

## Key Features

- High density 2U GPU system with up to 4 NVIDIA® PCIe GPUs  
Highest GPU communication using NVIDIA® NVLink™ using PCIe-based NVIDIA H100-NVL with NVIDIA NVLink support;
- 5th/4th Gen Intel® Xeon® Scalable processor support;
- 32 DIMM slots Up to 8TB: 32x 256 GB DRAM Memory Type: 5600MT/s ECC DDR5;
- 7 PCIe 5.0 x16 FHFL Slots;
- NVIDIA BlueField®-3 Data Processing Unit Support for the most demanding accelerated computing workloads.;
- 8 E1.S NVMe Storage Support;
- NVIDIA RTX PRO™ 6000 Blackwell GPUs at 450W by firmware control;



Form Factor	2U Rackmount Enclosure: 438.4 x 88 x 900mm (17.25" x 3.46" x 35.43") Package: (22.5" x 11" x 45.5")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon®/4th Gen Intel® Xeon® Scalable processors Up to 64C/128T; Up to 320MB Cache per CPU
GPU	Max GPU Count: Up to 4 double-width GPUs Supported GPU: NVIDIA PCIe: H100, H100 NVL, L40, L40S, NVIDIA RTX PRO™ 6000 Blackwell Server Edition CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: NVIDIA® NVLink™ Bridge (optional)
System Memory	Slot Count: 32 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 Max Memory (2DPC): Up to 8TB 4400MT/s ECC DDR5
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap E1.S NVMe drive bays</li> </ul> M.2: 2 M.2 NVMe/SATA slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 4 PCIe 5.0 x16 FHFL double-width slots</li> <li>• 3 PCIe 5.0 x16 FHFL slots</li> </ul>
On-Board Devices	Chipset: Intel® C741 Network Connectivity: 1 RJ45 1GbE IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 ports(rear) Video: 1 mini-DP port

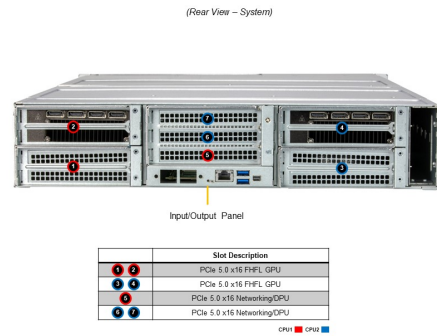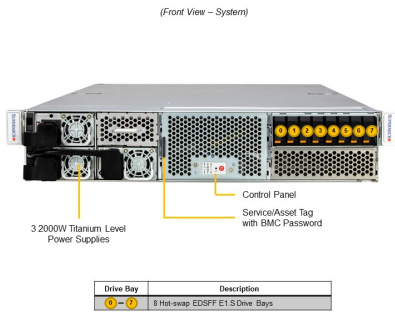

System Cooling	Fans: Up to 6x 6cm heavy duty fans with optimal fan speed control Air Shroud: 1 Air Shroud
Power Supply	3x 2000W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Server Manager (SSM); Supermicro Power Manager (SPM); Supermicro SuperDoctor® 5 (SD5); KVM with dedicated LAN ; IPMI 2.0; OOB Management Package (SFT-OOB-LIC ); SMCIPMITool; IPMIView
PC Health Monitoring	CPU: 8+4 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 86.5 lbs (39.2 kg) Net Weight: 67.5 lbs (30.6 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (max 21° DP; non-condensing) Non-operating Relative Humidity: 8% to 90% (max 38° DP; non-condensing)
Motherboard	<a href="#"><b>Super X13DEH</b></a>
Chassis	<b>CSE-GP201TS-R000NP</b>