

Hyper SuperServer SYS-222H-TN

2U Hyper with 8 hot-swap 2.5" NVMe/SAS/SATA bays and 4 PCIe 5.0 slots + up to 2 PCIe 5.0 x16 AIOM slots



More details here

Key Applications

Virtualization, Software-defined Storage, High Performance Computing, Cloud Computing, Enterprise Server,

Key Features

- Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores;
- 32 DIMM slots supporting up to 8TB of memory;
- Optional PCIe slot configurations up to 8 PCIe 5.0 x8 or 4 PCIe 5.0 x16 slots with support for double-width GPU/Accelerator cards;
- Flexible networking options with up to 2 AIOM networking slots (OCP NIC 3.0 compatible);
- 8x 2.5" hot-swap NVMe/SATA/SAS drive bays with optional configurations for 16x/24x 2.5" hot-swap NVMe/SAS/SATA drive bays; 2x internal M.2 NVMe drive slots; Optional RAID support via storage add-on card;



Form Factor

2U Rackmount
 Enclosure: 438.4 x 88 x 755.2mm (17.3" x 3.5" x 29.73")
 Package: 605 x 257 x 947mm (23.82" x 10.12" x 37.28")

Processor

Dual Socket E2 (LGA-4710)
 Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores
 P-cores: Up to 86C/172T; Up to 336MB Cache per CPU
 E-cores: Up to 144C/144T; Up to 108MB Cache per CPU

GPU

Max GPU Count: Up to 4 double-width or 8 single-width GPUs
 Supported GPU:
 NVIDIA PCIe: H100 NVL, A1000, A16, L4, L40S, NVIDIA RTX PRO™ 4000 Blackwell, NVIDIA RTX PRO™ 4500 Blackwell, NVIDIA RTX PRO™ 4500 Blackwell Server Edition, NVIDIA RTX PRO™ 5000 Blackwell, NVIDIA RTX PRO™ 6000 Blackwell Max-Q Workstation Edition, RTX 2000 Ada, RTX 4000 Ada Generation, RTX 5000 Ada, RTX 6000 Ada Generation

System Memory

Slot Count: 32 DIMM slots
 Max Memory (1DPC): Up to 4TB 6400MT/s ECC DDR5 RDIMM
 Max Memory (1DPC): Up to 1TB 8000MT/s ECC DDR5 MRDIMM (P-core only)
 Max Memory (2DPC): Up to 8TB 5200MT/s ECC DDR5 RDIMM

Drive Bays Configuration

Default: Total 8 bays
 • 8 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays
 Option A: Total 16 bays
 • 16 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays
 Option B: Total 24 bays
 • 24 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays
 (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details)
 M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)

Expansion Slots

PCI-Express (PCIe) Configuration: Option A*
 • 4 PCIe 5.0 x16 FH/10.5"L double-width slots
 • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)
 • 1 PCIe 5.0 x8 AIOM slot (OCP 3.0 compatible)
 Option B*
 • 8 PCIe 5.0 x8 (in x16) FH/10.5"L slots
 • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)
 • 1 PCIe 5.0 x8 AIOM slot (OCP 3.0 compatible)
 CXL Support: Up to 4 CXL 2.0 x16/x8 devices

On-Board Devices

NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required)
 Network Connectivity: Via AIOM



Input / Output

LAN: 1 RJ45 1 GbE Dedicated BMC LAN port

USB: 2 USB 3.0 ports(rear)

2 USB 3.0 ports(Header)

Video: 1 VGA port

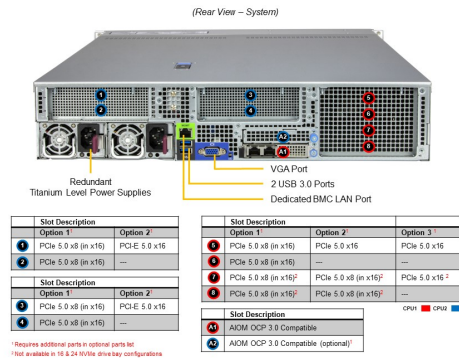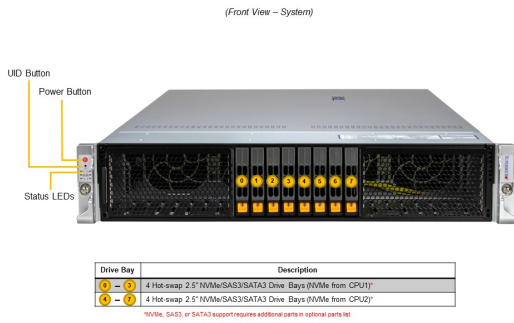

System Cooling	Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control Air Shroud: 2 Air Shrouds Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	2x 1200W Redundant (1 + 1) Titanium Level (96%) Hot-plug power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 66 lbs (30 kg) Net Weight: 40 lbs (18.2 kg) Available Color: Silver
Operating Environment	Name: A2 Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 80% (max 21° DP; non-condensing) Non-operating Relative Humidity: 8% to 90% (max 38° DP; non-condensing)
Motherboard	Super X14DBM-SP
Chassis	CSE-HS219-R000NP