

Hyper SuperServer SYS-222H-TN-01-G2

2U Hyper with 8 hot-swap 2.5" NVMe/SAS/SATA bays and 4 PCIe 5.0 slots + up to 2 PCIe 5.0 x16 AIOM slots



Key Applications

Virtualization & Private Cloud Consolidation

Gold Configuration Details

- CPU: 2x Intel® Xeon® 6740P (48C/2.1GHz)
- Memory: 1TB DDR5-6400
- Storage: 2x 3.8TB U.2 NVMe SSD
- NIC: 1x dual 25GbE SFP28
- Power: 2x 2000W Titanium Level



Base System Specs

Form Factor	2U Rackmount Enclosure: 438.4 x 88 x 755.2mm (17.3" x 3.5" x 29.73") Package: 605 x 257 x 947mm (23.82" x 10.12" x 37.28")
Processor	Dual Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 86C/172T; Up to 336MB Cache per CPU E-cores: Up to 144C/144T; Up to 108MB Cache per CPU
GPU	Max GPU Count: Up to 4 double-width or 8 single-width GPUs Supported GPU: NVIDIA PCIe: H100 NVL, A1000, A16, L4, L40S, NVIDIA RTX PRO™ 4000 Blackwell, NVIDIA RTX PRO™ 4500 Blackwell, NVIDIA RTX PRO™ 4500 Blackwell Server Edition, NVIDIA RTX PRO™ 5000 Blackwell, NVIDIA RTX PRO™ 6000 Blackwell Max-Q Workstation Edition, RTX 2000 Ada, RTX 4000 Ada Generation, RTX 5000 Ada, RTX 6000 Ada Generation
System Memory	Slot Count: 32 DIMM slots Max Memory (1DPC): Up to 4TB 6400MT/s ECC DDR5 RDIMM Max Memory (1DPC): Up to 1TB 8000MT/s ECC DDR5 MRDIMM (P-core only) Max Memory (2DPC): Up to 8TB 5200MT/s ECC DDR5 RDIMM
Drive Bays Configuration	(*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110)
Expansion Slots	Up to 4 CXL 2.0 x16/x8 devices
On-Board Devices	NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) 2 USB 3.0 ports(Header) Video: 1 VGA port


(Front View – System)



Drive Bay	Description
1 – 4	4 Hot-swap 2.5" 10k/6e/SAS/SATA3 Drive Bays (10k/6e from CPU1)
5 – 8	4 Hot-swap 2.5" 10k/6e/SAS/SATA3 Drive Bays (10k/6e from CPU2)

*10k/6e, SAS1, or SATA3 support requires additional parts in optional parts list

(Rear View – System)

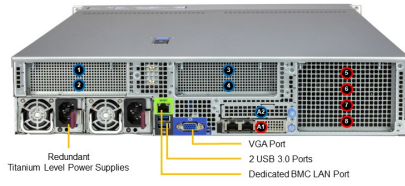

Slot Description	Option 1	Option 2	Option 3
Option 1	PCIe 5.0 x8 (m x16)	PCI-E 5.0 x16	PCIe 5.0 x16
Option 2	PCIe 5.0 x8 (m x16)	—	—
Option 3	PCIe 5.0 x8 (m x16) ²	PCIe 5.0 x8 (m x16) ²	PCIe 5.0 x16 ²

Slot Description	Option 1	Option 2
Option 1	PCIe 5.0 x8 (m x16)	PCI-E 5.0 x16
Option 2	PCIe 5.0 x8 (m x16)	—

Slot Description
AIOM OCP 3.0 Compatible
AIOM OCP 3.0 Compatible (optional)

¹Requires additional parts in optional parts list
²Not available in 16 & 24 NVMe drive bay configurations

System Cooling	Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control Air Shroud: 2 Air Shrouds Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	2x 1200W Redundant (1 + 1) Titanium Level (96%) Hot-plug power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 66 lbs (30 kg) Net Weight: 40 lbs (18.2 kg) Available Color: Silver
Operating Environment	Name: A2 Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 80% (max 21° DP; non-condensing) Non-operating Relative Humidity: 8% to 90% (max 38° DP; non-condensing)
Motherboard	Super X14DBM-SP
Chassis	CSE-HS219-R000NP