

MP SuperServer SYS-242H-NR

2U 4-socket system with 64 DIMMs and 8 NVMe drive bays



More details here

Key Applications

Business Intelligence, ERP, CRM, Scientific Virtualization, In-Memory Database, HCI, SAP HANA,

Key Features

- Quad Intel® Xeon® 6700-Series Processors with P-cores up to 350W with air cooling;
- Support for up to 2 double-width PCIe GPU accelerator cards;
- Up to 64 DIMMs supporting up to 16TB DDR5 in 2DPC;
- Flexible networking with up to 2 OCP 3.0 compatible AIOM slots;
- Up to 2 PCIe 5.0 x8 FHHL + 4 PCIe 5.0 x16 FHHL + 2 PCIe 5.0 x16 AIOM;
- Up to 8 front hot-swap 2.5" NVMe drive bays;
- 4 Redundant 2700W Titanium Level power supplies;




Form Factor	2U Rackmount Enclosure: 438.4 x 88 x 848.7mm (17.3" x 3.5" x 33.4") Package: 701 x 293 x 1183mm (27.6" x 11.53" x 46.57")
Processor	Quad E2 (LGA-4710) Intel® Xeon® 6700 series processors with P-cores (4S/8S) Up to 86C/172T; Up to 336MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width GPUs CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: 64 DIMM slots Max Memory (1DPC): Up to 8TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 16TB 5200MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> • 8 front hot-swap 2.5" NVMe drive bays M.2: 1 M.2 PCIe 4.0 x4 NVMe slot (M-key 2280/22110; VROC required for RAID) 1 M.2 PCIe 4.0 x4 NVMe slot (M-key 22110; VROC required for RAID)
Expansion Slots	Default <ul style="list-style-type: none"> • 2 PCIe 5.0 x8 (in x16) FHHL slots • 4 PCIe 5.0 x16 FHHL slots • 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible) Option A* <ul style="list-style-type: none"> • 2 PCIe 5.0 x16 FHHL double-width slots • 2 PCIe 5.0 x16 FHHL slots • 2 PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)
On-Board Devices	Chipset: System on Chip Network Connectivity: Via AIOM
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 Type-A ports(Rear) Video: 1 VGA port(Front) 1 DisplayPort port(Rear) Serial: 1 COM port(rear)

(Front View – System)



Drive Bay	Description
0 – 7	8 Hot-swap 2.5" NVMe Drive Bays

(Rear View – System)

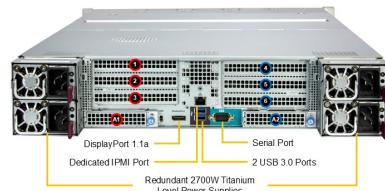

	Slot Description
PCIe 5.0 x8 (in x16) FHHL*	
PCIe 5.0 x16 FHHL*	
PCIe 5.0 x16 FHHL	
PCIe 5.0 x16 AVOM (OCP 3.0)	

*Supports FFL with lower TDP CPUs

System Cooling

Fans: Up to 2 Internal Heavy duty counter-rotating 6cm Fan(s)
 Up to 3 Heavy duty counter-rotating 8cm Fan(s)
 Air Shroud: 4 Air Shrouds

Power Supply

4x 2700W Redundant (2 + 2) Titanium Level (96%) power supplies

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory
 8 Phase-switching voltage regulator
 FAN: Fans with tachometer monitoring
 Status monitor for speed control
 Pulse Width Modulated (PWM) fan connectors
 Temperature: Monitoring for CPU and chassis environment
 Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 99.7 lbs (45.2 kg)
 Net Weight: 72.1 lbs (32.7 kg)
 Available Color: Silver

Operating Environment

RoHS Compliant
 Operating Temperature: 10°C to 35°C (50°F to 95°F)
 Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)
 Operating Relative Humidity: 8% to 90% (Non-Condensing)
 Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

Motherboard

[Super X14QBH+](#)

Chassis

CSE-218H2TS-R5K4AWP