

UP SuperServer SYS-510T-M

1U UP mainstream with 4 hot-swap 3.5" drive bays




More details here

Key Applications

Web/Hosting Application, Email/Firewall/Print Server, General Purpose,


Key Features

- Single Socket H5 (LGA-1200) supports Intel® Xeon® E-2300 series, Intel® Pentium® processors;
- 4 DIMMs; Up to 128GB of DDR4 ECC UDIMM memory with speeds of up to 3200MHz;
- 1 PCIe 4.0 x16 or 2 PCIe 4.0 x8 (FHHL); 1 Dedicated Internal HBA slot;
- Intel® Ethernet Controller i210 2x 1GbE RJ45;
- Single Platinum 350W Power Supply;

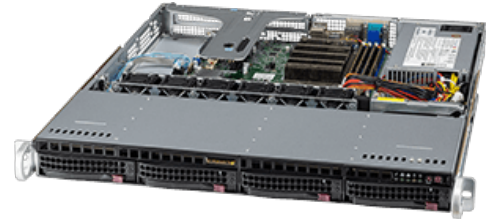


Form Factor	<p>1U Rackmount</p> <p>Enclosure: 437 x 43 x 507mm (17.2" x 1.7" x 19.98")</p> <p>Package: 609.6 x 215.9 x 749.3mm (24" x 8.5" x 29.5")</p>
Processor	<p>Single Socket H5 (LGA-1200)</p> <p>Intel® Xeon® E-2300 series Processors and 10th Gen. Pentium® Processors</p> <p>Up to 8C/16T; Up to 16MB Cache</p>
GPU	<p>Max GPU Count: Up to 1 single-width GPU</p> <p>Supported GPU: NVIDIA PCIe: T1000, T400</p> <p>CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect</p>
System Memory	<p>Slot Count: 4 DIMM slots</p> <p>Max Memory (2DPC): Up to 128GB 3200MT/s ECC DDR4 UDIMM</p>
Drive Bays Configuration	<p>Default: Total 4 bays</p> <ul style="list-style-type: none"> • 4 front hot-swap 3.5" SATA drive bays <p>M.2: 1 M.2 NVMe slot (M-key 2280/22110)</p> <p>Peripheral Bays: 2 2.5" bays (optional)</p>
Expansion Slots	<p>Default</p> <ul style="list-style-type: none"> • 1 PCIe 4.0 x8 FHFL slot • 1 PCIe 4.0 x8 LP slot <p>Option A</p> <ul style="list-style-type: none"> • 1 PCIe 4.0 x16 FHFL slot
On-Board Devices	<p>SATA: SATA (6Gbps) ; RAID 0/1/5/10 support</p> <p>Network Connectivity: 2 RJ45 1GbE with Intel® I210</p>
Input / Output	<p>LAN: 2 RJ45 1 GbE LAN ports</p> <p>1 RJ45 1 GbE Dedicated BMC LAN port (IPMI shared on LAN port 1)</p> <p>USB: 4 USB 2.0 ports(header)</p> <p>2 USB 3.2 Gen1 Type-A ports(rear)</p> <p>2 USB 2.0 Type-A ports(rear)</p> <p>2 USB 3.2 Gen1 ports(Header)</p> <p>1 USB 3.2 Gen1 Type-A port(Header)</p> <p>Video: 1 VGA port</p> <p>Serial: 1 COM port(Rear)</p> <p>1 COM port(Header)</p> <p>DOM: 2 Super DOM (Disk on Module) portswith built-in power</p> <p>TPM: 1 TPM header</p>

(Front View - System)

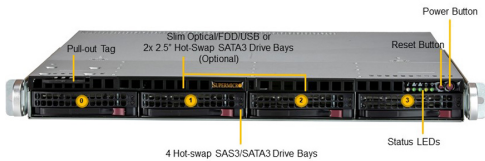

Drive Bay	Description
1 - 2	4x 3.5" Hot-swap SAS3/SATA3 Drive Bays

(Rear View - System)

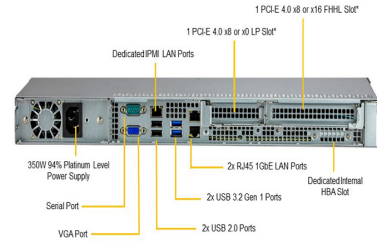

* Platinum CPUs provide PCIe 3.0 only

System Cooling	Fans: Up to 4 middle cooling PWM 40x40x28mm Fan(s) Up to 2 AOC cooling Fan(s) (optional) Air Shroud: 1 Air Shroud
Power Supply	1x 350W Platinum Level (93%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 6 + 2 + 1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 30.4 lbs (13.8 kg) Net Weight: 17.6 lbs (8 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<u>Super X12STH-SYS</u>
Chassis	CSE-813MF2TS-350RCBP