

# WIO SuperServer SYS-512B-WR

1U UP WIO with 4 hot-swap 3.5" NVMe/SAS/SATA bays and 3 PCIe 5.0 slots



More details here

## Key Applications


Enterprise Applications, General Purpose Computing, Cloud Computing, Web/Hosting Application, Network Appliance, Database/Storage, Storage Headnode, Entry GPU server,

## Key Features


- WIO systems offer flexible I/O configurations in a cost-effective architecture to deliver truly optimized systems for specific enterprise requirements.;
- Single Intel® Xeon® 6 Processor;
- 8 DIMM slots supporting up to 2TB of memory;
- Tool-less, Top-loading riser design support 3 PCIe 5.0 Expansion (2x FHFL + 1x LP).;
- Native SATA drives supported, with option PCIe 5.0 NVMe and SAS.;
- Trusted Platform Module (TPM) 2.0 onboard.;



Form Factor	1U Enclosure: 437 x 43 x 650mm (17.2" x 1.7" x 25.6") Package: 597 x 216 x 856mm (23.5" x 8.5" x 33.7")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 86C/172T; Up to 336MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
GPU	Max GPU Count: Up to 1 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: NVIDIA RTX PRO™ 4500 Blackwell Server Edition, RTX 2000 Ada, RTX 4000 Ada Generation NVIDIA: RTX A400 CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect
System Memory	Slot Count: 8 DIMM slots/8 Channels Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5" SAS*/SATA drive bays</li> </ul> Option A: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5"/2.5" PCIe 5.0 x4 NVMe*/SAS*/SATA drive bays</li> </ul> (*NVMe/SAS support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 5.0 x2 NVMe slots (M-key 2280/22110; VROC required for RAID) Peripheral Bays: 2 slim peripheral bays
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x16 FHFL slots</li> <li>• 1 PCIe 5.0 x8 (in x16) LP slot</li> </ul>
On-Board Devices	SATA: SATA (6Gbps) NVMe: NVMe; RAID 0/1/5/10 support(Intel® VROC RAID key required) Network Connectivity: 2 RJ45 1GbE with Intel® I210
Input / Output	LAN: 2 RJ45 1 GbE LAN ports 1 RJ45 1 GbE Dedicated BMC LAN port (IPMI shared on LAN port 1) USB: 2 USB 3.2 Gen1 Type-A ports(rear) 2 USB 3.2 Gen1 ports(Header) Video: 1 VGA port Serial: 1 COM port(header) 1 COM port(rear) TPM: 1 TPM header

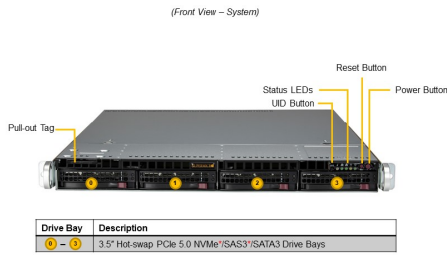

\*NVMe or SAS3 support requires additional parts from the optional parts list

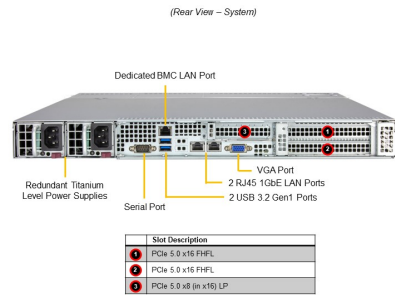

System Cooling	Fans: Up to 1 AOC cooling Fan(s) (optional) Up to 5 middle cooling PWM 40x40x56mm Fan(s) Air Shroud: 1 CPU Air Shroud
Power Supply	2x 860W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 8 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 34.5 lbs (15.46 kg) Net Weight: 21.5 lbs (9.75 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	<a href="#"><u>Super X14SBW-F</u></a>
Chassis	<a href="#"><u>CSE-815BTS-R000WNP</u></a>