

# GPU SuperServer SYS-740GP-TNRT

DP Intel, Tower Workstation with 4 GPUs



More details here

## Key Applications


Scientific Virtualization, High Performance Computing, Rendering, AI/Deep Learning Training,

## Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 16 DIMM Slots; Up to 4TB DRAM; Up to 6TB Intel® Optane™ Persistent Memory ; 3200/2933/2666 ECC DDR4 LRDIMM; RDIMM; Intel® Optane™ Persistent Memory 200 series;
- 4 PCIe 4.0 x16 (double-width) slots, 2 PCIe 4.0 x16 (single-width) slots, 1 PCIe 4.0 x8 LP;
- Total 8x 3.5" Hot-swap drive bays  
Up to 8 NVMe drives (4 NVMe drives supported by default)  
2 M.2 NVMe or SATA for boot drive only;
- 4 Removable heavy duty fans w/ Optimal Fan Speed Control;
- 2x 2200W redundant Titanium level power supplies;



<b>Form Factor</b>	Full-Tower Rackmount Enclosure: 177 x 465.4 x 678.5mm (6.96" x 18.32" x 26.71") Package: 689 x 329 x 971mm (27.12" x 12.95" x 38.22")
<b>Processor</b>	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU
<b>GPU</b>	Max GPU Count: Up to 4 double-width or 6 single-width GPUs Supported GPU: NVIDIA PCIe: A10, A100, A16, A30, A40, RTX A4000, RTX A4500, RTX A5000, RTX A6000 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
<b>Drive Bays Configuration</b>	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5" SAS/SATA drive bays</li> <li>• 4 front hot-swap 3.5" NVMe/SAS/SATA drive bays</li> </ul> M.2: 2 M.2 NVMe/SATA slots (M-key) Peripheral Bays: 3 5.25" peripheral bays
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 4 PCIe 4.0 x16 FHFL slots</li> <li>• 2 PCIe 4.0 x16 LP slots</li> <li>• 1 PCIe 4.0 x8 LP slot</li> </ul>
<b>On-Board Devices</b>	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Network Connectivity: 2 RJ45 10GbE with Intel® X550-AT2 BMC: ASPEED AST2600 BMC
<b>Input / Output</b>	1 VGA port

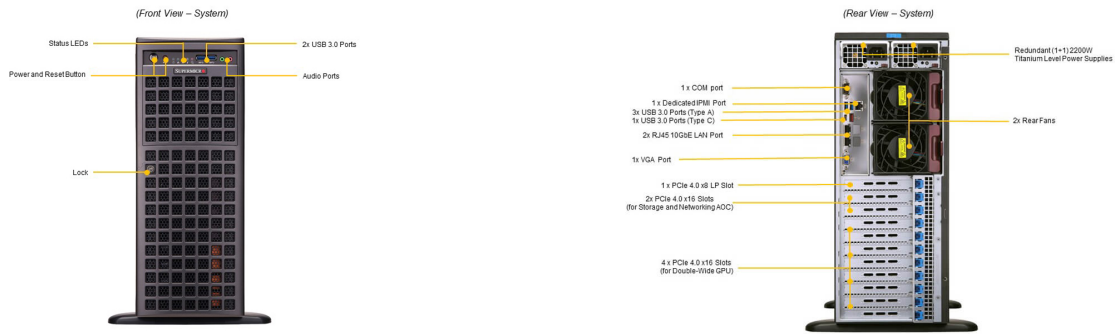

System Cooling	Fans: Up to 4 heavy duty fans with optimal fan speed control
Power Supply	1x 2200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7 +1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 57 lbs (25.85 kg) Net Weight: 52.9 lbs (24 kg) Available Color: black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><u>Super X12DPG-QT6</u></a>
Chassis	<b>CSE-747BTS-R2K20BP</b>