

# Mainstream SuperServer SYS-740P-TRT

4U tower server with 10G LAN for office and enterprise applications



More details here

## Key Applications

Enterprise Server, Application and data serving, Model analysis, Compute


Intensive Applications, Office environment,

## Key Features

- Dual sockets P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors; CPU TDP supports Up to 270W TDP; 3 UPI up to 11.2 GT/s;
- Up to 4TB 3DS ECC RDIMM, DDR4-3200MHz, Up to 4TB 3DS ECC LRDIMM, DDR4-3200MHz; Up to 4TB Intel® Optane™ Persistent Memory 200 Series, DDR4-3200MHz, in 18 DIMM slots (P1-DIMMB2 and P2-DIMMB2 are reserved for Intel® Optane Persistent Memory 200 Series only);
- 4 PCIe 4.0 x16 Full Height (FH); 2 PCIe 4.0 x8 Full Height (FH);
- Dual 10GBase-T LAN with Intel® X550 Ethernet Controller;
- Three 80mm high-performance 9.4K RPM Hot-swappable Middle Cooling Fans; Two 80mm 9.4K RPM Rear Exhaust Fans; 1 air shroud;
- 1200W Redundant Power Supplies Titanium level 100-240Vac and 200-240Vdc, Whisper-Quiet;
- 1 rear VGA, 1 Type A port, 1 COM Port (rear) and 6 USB ports (2 front USB 3.0 and 4 rear USB 3.0);



Form Factor	Tower/4U Rackmount Enclosure: 178 x 452 x 647mm (7" x 17.8" x 25.5") Package: 356 x 625 x 795mm (14" x 24.6" x 31.3")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 36C/72T; Up to 60MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 3.5" SAS*/SATA drive bays</li> </ul> Option A: Total 10 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 3.5" SAS*/SATA drive bays</li> <li>• 2 front fixed 3.5" NVMe*/SATA* drive bays</li> </ul> (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 NVMe slot (M-key) Peripheral Bays: 1 5.25" DVD bay (optional)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 4 PCIe 4.0 x16 LP slots</li> <li>• 2 PCIe 4.0 x8 LP slots</li> </ul>
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GbE
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 2.0 ports(front) 4 USB 3.0 ports(rear) Video: 1 VGA port DOM: 2 Super <u>DOM</u> (Disk on Module) ports

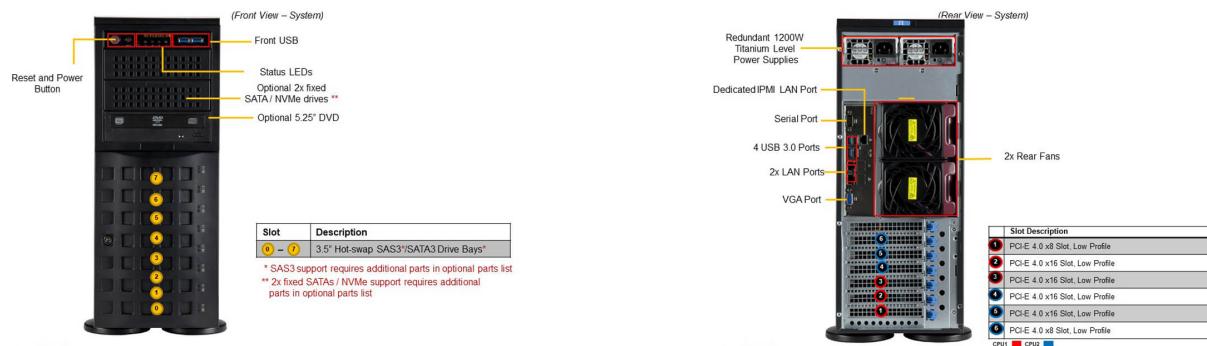

## System Cooling

Fans: Up to 3 middle Fan(s)  
Up to 2 rear Fan(s)

## Power Supply

1x 1200W Redundant Titanium Level (96%) power supply

## System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

## Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

## PC Health Monitoring

CPU: 4+1 Phase-switching voltage regulator  
Monitors for CPU Cores, Chipset Voltages, Memory  
FAN: Fans with tachometer monitoring  
Pulse Width Modulated (PWM) fan connectors  
Status monitor for speed control  
Temperature: Monitoring for CPU and chassis environment  
Thermal Control for fan connectors

## Dimensions and Weight

Weight: Gross Weight: 73.5 lbs (33.9 kg)  
Net Weight: 56 lbs (25.9 kg)  
Available Color: Black

## Operating Environment

RoHS Compliant  
Operating Temperature: 10°C to 35°C (50°F to 95°F)  
Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)  
Operating Relative Humidity: 8% to 90% (Non-Condensing)  
Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

## Motherboard

[Super X12DPi-NT6](#)

## Chassis

[CSE-745BTS-R1K23BP](#)