

IoT SuperServer SYS-E200-12D-10C

Embedded Mini-ITX Box Based on Intel Xeon D-1749NT processor



More details here

Key Applications

Virtualization, Firewall Applications, Embedded Networking Applications, Networking Security Appliance,

Key Features

- Intel® Xeon® Processor D-1749NT, CPU TDP 90W, Intel® Quick Assist Technology;
- 2 DIMMs Slots; Up to 128GB DDR4-2666 ECC and Non-ECC RDIMM/UDIMM;
- 1x dedicated LAN for IPMI
2x 10GbE Base-T LAN ports
2x 25GbE SFP28 LAN ports;
- 1 M.2 PCIe 4.0 x4/SATA 3.0, M-Key 2280;




| | |
|---------------------------------|---|
| Form Factor | Mini-ITX Enclosure: 195 x 43 x 225.8mm (7.68" x 1.69" x 8.89") Package: 380 x 285 x 139mm (14.96" x 11.22" x 5.47") |
| Processor | Single processor(s) Intel® Xeon® Processor D-1749NT Up to 10C/20T; Up to 15MB Cache |
| System Memory | Slot Count: 2 DIMM slots Max Memory (1DPC): Up to 128GB 2933MT/s ECC/non-ECC DDR4 RDIMM/UDIMM |
| Drive Bays Configuration | 1 M.2 PCIe 4.0 x4 NVMe/SATA slot (M-key 2280) |
| On-Board Devices | 2 RJ45 10GbE with Intel® X550-AT2 2 SFP28 25GbE 1 RJ45 1GbE with Realtek RTL8211F PHY (dedicated IPMI) |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 SFP28 25 GbE LAN ports 2 RJ45 10 GbE LAN ports (Intel® X550-AT2) USB: 2 USB 3.0 Type-A ports(Rear) Video: 1 VGA port(Rear) |

(Front View - System)



(Rear View - System)

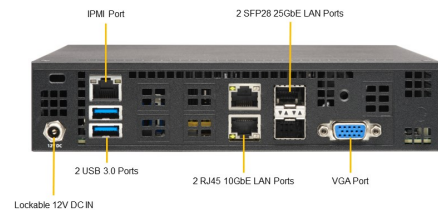

| | |
|-----------------------|--|
| System Cooling | Fans: Up to 3x 4-PIN PWM 40x40x28mm Fan(s) |
| Power Supply | 1x 180W power supply |
| System BIOS | <p>BIOS Type: AMI 32MB UEFI</p> <p>BIOS Features: Plug and Play (PnP)</p> <p>SMBIOS 3.0 or later</p> <p>ACPI 6.0</p> <p>Riser Card audio detection support</p> |
| Management | <p>SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!</p> |
| Dimensions and Weight | <p>Weight: Gross Weight: 7.5 lbs (3.4 kg)</p> <p>Net Weight: 2.76 lbs (1.25 kg)</p> <p>Available Color: Black</p> |
| Operating Environment | <p>Operating Temperature: 0°C to 40°C (32°F to 104°F)</p> <p>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)</p> <p>Operating Relative Humidity: 8% to 90% (non-condensing)</p> <p>Non-operating Relative Humidity: 5% to 95% (non-condensing)</p> |
| Motherboard | <u>Super X12SDV-10C-SPT4F</u> |
| Chassis | CSE-101F |