

# Embedded SuperServer SYS-E300-14AR

Mini-1U Embedded System with Intel® Core™ Ultra processor up to 65W TDP



## Key Applications

Healthcare, Surveillance Security Server, AI Inference, Digital Signage / PoS,

## Key Features

- Single Intel® Core™ Ultra 9/7/5 Series 2 Processor up to 65W with air cooling;
- Support Low-Profile of PCIe GPU cards;
- Up to 2 ECC/Non-ECC SODIMMs supporting up to 96GB with DDR5-6400MT/s;
- 2 RJ45 2.5GbE + 2 RJ45 10GbE LAN ports;
- 1 PCIe 5.0 x16 LP slots;
- 1 internal fixed 2.5" SATA drive bays;




<b>Form Factor</b>	Fan-based Embedded Enclosure: 264.8 x 43 x 225.8mm (10.43" x 1.69" x 8.89") Package: 381 x 276 x 142mm (15" x 10.87" x 5.59")
<b>Processor</b>	Single LGA-1851 Intel® Core™ Ultra 9/7/5 (Series 2) processors
<b>System Memory</b>	Slot Count: 2 DIMM slots Max Memory (1DPC): Up to 96GB 6400MT/s ECC/non-ECC DDR5 SO-DIMM
<b>Drive Bays Configuration</b>	Default: Total 1 bay <ul style="list-style-type: none"> <li>• 1 internal fixed 2.5" SATA* drive bay</li> </ul> (*SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 1 M.2 PCIe 5.0 x4 NVMe slot (M-key 2280)
<b>Expansion Slots</b>	PCI-Express (PCIe) Configuration: Default* <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x16 (in x16) LP slot</li> </ul> (*Requires additional parts, please see the optional parts list for details. For more details on PCIe slot configuration options, please refer to the system callout images above.) M.2: 1 M.2 PCIe 4.0 x2 slot (B-key 3052)
<b>On-Board Devices</b>	Intel® W880
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GbE LAN ports (Intel® X550) 2 RJ45 2.5 GbE LAN ports (Intel® I226-LM) USB: 4 USB 3.2 Gen2 Type-A ports(Rear) Video: 1 VGA port(Rear) 1 DisplayPort port(Rear) 1 HDMI port(Rear) TPM: 1 TPM header 1 TPM Onboard/port 80

(Front View – System)



(Rear View – System)

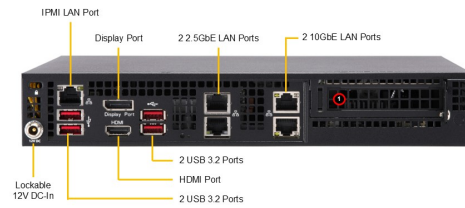

Slot	Slot Description
1	PCIe 5.0 x16 LP

System Cooling	Fans: Up to 1 CPU heatsink with $\Phi 80 \times 15 \text{mm}$ Fan(s) Up to 2x 4-PIN PWM 40x40x28mm Fan(s)
Power Supply	1x 180W power supply
System BIOS	BIOS Type: AMI 32MB UEFI BIOS Features: ACPI 6.5 SMBIOS 3.7 or later UEFI 2.9
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; Plug-ins for 3rd Party Software
Dimensions and Weight	Weight: Gross Weight: 7.5 lbs (3.4 kg) Net Weight: 3.7 lbs (1.6 kg) Available Color: Black
Operating Environment	Operating Temperature: 0°C to 40°C (32°F to 104°F) with 0.7 m/s airflow Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><u>Super X14SAV-TLN4F</u></a>
Chassis	CSE-E300