

# IoT SuperServer SYS-E403-13E-FRN2T

X13 2.5U Box PC with Intel 5th / 4th Gen Intel Xeon Scalable processor and support for 3 PCIe 5.0 x16 (FHFL) slots and 2 10GbE LAN



More details here

## Key Applications



Multi-Access Edge Computing (MEC), Universal Customer Premise Equipment (uCPE), Industrial Automation, Retail, Machine Learning (ML), Edge AI,

## Key Features

- Support 5th and 4th Gen Intel® Xeon® Scalable processors;
- Up to 8 DIMMs and total 2TB 3DS ECC DDR5-5600 RDIMM;
- 3x PCIe5.0 x16 slot;
- 2x 10 Gigabit Ethernet Ports;
- Up to 2 front hot-swap 2.5" NVMe + 2 internal fixed 2.5" SATA drive bays;



Form Factor	Fan-based Embedded Enclosure: 266.7 x 117.348 x 406.4mm (10.5" x 4.62" x 16") Package: 416 x 264 x 660mm (16.4" x 10.4" x 26")
Processor	Single Socket E (LGA-4677) 5th Gen Intel® Xeon®/4th Gen Intel® Xeon® Scalable processors Up to 32C/64T; Up to 60MB Cache
GPU	Max GPU Count: Up to 1 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: A10, A2, L4, L40, L40S, RTX 4000 Ada Generation, RTX 6000 Ada Generation
System Memory	Slot Count: 8 DIMM slots Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none"> <li>• 2 front hot-swap 2.5" NVMe drive bays</li> <li>• 2 internal fixed 2.5" SATA* drive bays</li> </ul> (*SATA support may require additional storage controller and/or cables) M.2: 1 M.2 PCIe 3.0 x2 NVMe slot (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 3 PCIe 5.0 x16 FHFL slots</li> </ul>
On-Board Devices	NVMe: NVMe; RAID 0/1 support(Intel® VROC RAID key required) Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550-AT2 1 RJ45 1GbE with Realtek RTL8211F PHY (dedicated IPMI)
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GbE LAN ports (Intel® X550-AT2) USB: 2 USB 2.0 Type-A ports(front) 4 USB 3.2 Gen1 Type-A ports(Front) Video: 1 VGA port(Front) Serial: 1 COM port(Front)

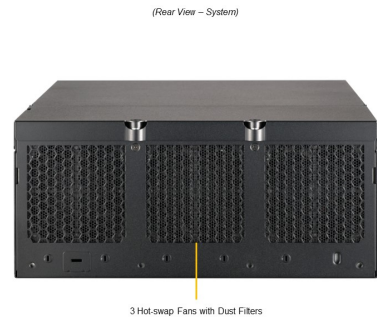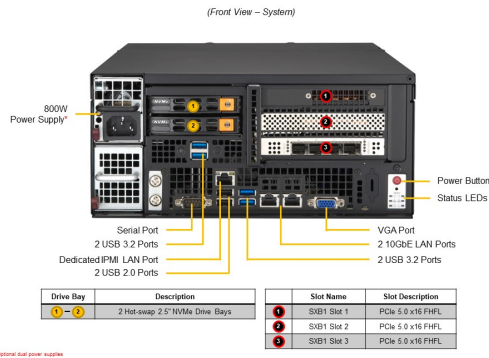

**System Cooling**

Fans: Up to 3x 8cm heavy duty fans with optimal fan speed control 80x80x38mm Fan(s)  
 Air Shroud: 1 Air Shroud

**Power Supply**

1x 800W Redundant Platinum Level (94%) power supply

**Management**

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

**Dimensions and Weight**

Weight: Gross Weight: 24.5 lbs (10.95 kg)  
 Net Weight: 18.5 lbs (8.16 kg)  
 Available Color: Black

**Operating Environment**

Operating Temperature: 0°C to 45°C (32°F to 113°F)  
 Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)  
 Operating Relative Humidity: 8% to 90% (non-condensing)  
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

**Motherboard**

[Super X13SEW-TF](#)

**Chassis**

CSE-E403BiF-000NDBP2