

GPU SuperServer ARS-121L-DNR

1U 2-Node NVIDIA Grace CPU Superchip system supporting NVIDIA BlueField-3 or NVIDIA ConnectX-7



More details here

Key Applications

High Performance Computing, Hyperscale Cloud Applications, Data Analytics,


Key Features

- Pending a firmware fix, this system currently supports four E1.S drives. Please consult your Supermicro Salesperson for details.;
- Two nodes in a 1U form factor. Each node supports the following:;
- High density 1U 2-node system with NVIDIA Grace™ CPU Superchip per node;
- NVLink® Chip-2-Chip (C2C) high-bandwidth, low-latency interconnect between CPU and CPU at 900GB/s;
- Up to 960GB LPDDR5X onboard memory (per node);
- 2x PCIe 5.0 x16 slots per node supporting NVIDIA BlueField®-3 or ConnectX®-7;
- Up to 2x Hot-swap E1.S drives and 2x M.2 NVMe drives per node;
- 7 Hot-Swap Heavy Duty Fans with Optimal Fan Speed Control;



Form Factor	1U Rackmount Enclosure: 440 x 44 x 940mm (17.33" x 1.75" x 37") Package: 711 x 241 x 1219mm (28" x 9.5" x 48")
Processor	Dual processor(s) NVIDIA Dual 72-core CPUs on a Grace™ CPU Superchip
System Memory	Slot Count: Onboard Memory Max Memory: Up to 960GB ECC
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none">• 4 front hot-swap E1.S NVMe drive bays M.2: 4 M.2 NVMe slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none">• 2 PCIe 5.0 x16 FHFL slots
On-Board Devices	NVIDIA C2
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 ports(rear) Video: 1 mini-DP port

(Front View – System)

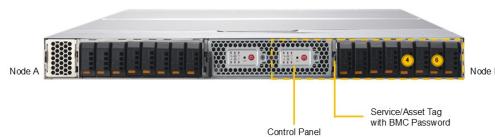

Drive Bay (Node A-B)	Description
2	2 Fixed E1.S NVMe Drive Bays

(Rear View – System)



Per Node (Node A-B)	Slot Description
1	PCIe 5.0 x16 FHHL (on physical motherboard slot 4)
1	PCIe 5.0 x16 HHHL (on physical motherboard slot 5)

System Cooling

Fans: Up to 9 Removable heavy-duty 4cm Fan(s)

Power Supply

2x 2000W Redundant Titanium Level (96%) power supplies

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory

FAN: Fans with tachometer monitoring

Status monitor for speed control

Pulse Width Modulated (PWM) fan connectors

Temperature: Monitoring for CPU and chassis environment

Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 65.5 lbs (29.7 kg)

Net Weight: 48.5 lbs (22 kg)

Available Color: Silver

Operating Environment

Operating Temperature: 10°C to 35°C (50°F to 95°F)

Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)

Operating Relative Humidity: 8% to 90% (non-condensing)

Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[Super G1SMH](#)

Chassis

[CSE-GP102TS-R000NDFP](#)