

UP SuperServer SYS-110T-M

1U UP mainstream with 8 hot-swap 2.5" drive bays



More details here

Key Applications


Web/Hosting Application, Database Processing and Storage, Encoding
Decoding,

Key Features

- Single Socket H5 (LGA-1200) supports Intel® Xeon® E-2300 series, Intel® Pentium® processors;
- 4 DIMMs; Up to 128GB of DDR4 ECC UDIMM memory with speeds of up to 3200MHz;
- 1 PCIe 4.0 x16 or 2 PCIe 4.0 x8 (FHHL); 1 Dedicated Internal HBA slot;
- Intel® Ethernet Controller i210 2x 1GbE RJ45;
- Default single Platinum 400W Power Supply; Optional redundant power by adding 1x Power Supply Module;



Form Factor	1U Rackmount Enclosure: 437 x 43 x 507mm (17.2" x 1.7" x 19.98") Package: 609.6 x 215.9 x 749.3mm (24" x 8.5" x 29.5")
Processor	Single Socket H5 (LGA-1200) Intel® Xeon® E-2300 series Processors and 10th Gen. Pentium® Processors Up to 8C/16T; Up to 16MB Cache
GPU	Max GPU Count: Up to 1 single-width GPU Supported GPU: NVIDIA PCIe: T400, T1000 CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect
System Memory	Slot Count: 4 DIMM slots Max Memory (2DPC): Up to 128GB 3200MT/s ECC DDR4 UDIMM
Drive Bays Configuration	Default: Total 8 bays • 8 front hot-swap 2.5" SATA drive bays M.2: 1 M.2 PCIe 3.0 x4 SATA slot (M-key 2280/22110)
Expansion Slots	Default • 1 PCIe 4.0 x8 FHHL slot • 1 PCIe 4.0 x8 LP slot Option A • 1 PCIe 4.0 x16 FHHL slot
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Chipset: Intel® C256 Network Connectivity: 2 RJ45 1GbE with Intel® I210
Input / Output	LAN: 2 RJ45 1 GbE LAN ports 1 RJ45 1 GbE Dedicated BMC LAN port (IPMI shared on LAN port 1) USB: 4 USB 2.0 ports(header) 2 USB 3.2 Gen1 Type-A ports(rear) 2 USB 2.0 Type-A ports(rear) 2 USB 3.2 Gen1 ports(Header) 1 USB 3.2 Gen1 Type-A port(Header) Video: 1 VGA port Serial: 1 COM port(Rear) 1 COM port(Header) DOM: 2 SuperDOM (Disk on Module) portswith built-in power TPM: 1 TPM header

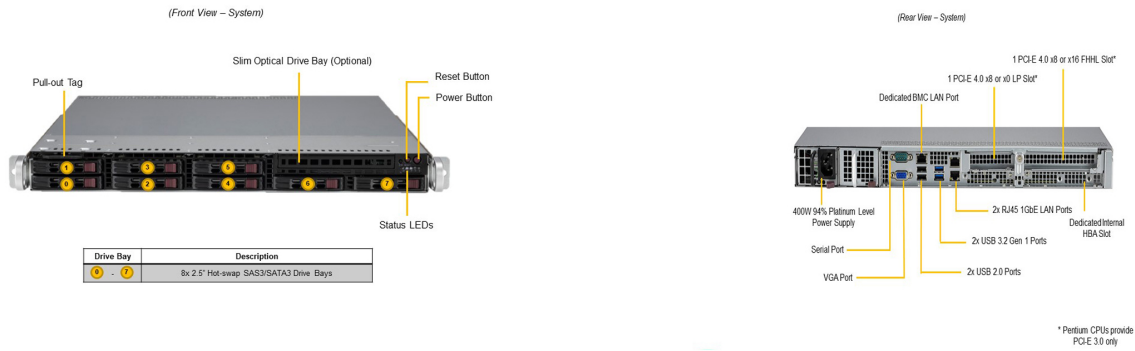

System Cooling	Fans: Up to 4 middle cooling PWM 40x40x28mm Fan(s) Up to 2 AOC cooling Fan(s) (optional) Air Shroud: 1 Air Shroud
Power Supply	1x 400W Redundant Platinum Level (94%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 6 + 2 + 1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 30.4 lbs (13.8 kg) Net Weight: 17.6 lbs (8 kg) Available Color: Black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X12STH-SYS
Chassis	CSE-113MFTS-407RCBP-1P