

IoT SuperServer SYS-210TP-HPTRD

X12 SuperEdge 2U4-Node UP rear I/O Server with 24 SATA bays



More details here

Key Applications

Multi-Access Edge Computing (MEC), VRAN/ORAN for Telecom, Enterprise Edge,


Key Features

- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following:;
- Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processor (per node);
- Intel® C621A Chipset;
- 8 DIMMs; Up to 2TB 3DS ECC DDR4-3200: RDIMM/LRDIMM (per node);
- 2 PCIe Gen4 x16 HHHL slot (per node);
- 2 NVMe M.2 2280/22110 (per node)
- Front hot-swappable 2.5" HDD/SSD tray (6 tray per node);
- 4 heavy duty 8cm PWM fans with optimal fan speed control (Per System);
- 1+1 Redundant 2000W DC Power Supplies (per system);
- Intel® X710 Dual port 10G SFP+ onboard;




| | |
|--------------------------|---|
| Form Factor | 2U Rackmount Enclosure: 438 x 88 x 730mm (17.25" x 3.5" x 28.75") Package: 526 x 250 x 965mm (20.7" x 9.8" x 38") |
| Processor | Single Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 32C/64T; Up to 48MB Cache |
| System Memory | Slot Count: 8 DIMM slots Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 RDIMM/LRDIMM |
| Drive Bays Configuration | Default: Total 6 bays <ul style="list-style-type: none"> • 6 front hot-swap 2.5" SATA drive bays M.2: 2 M.2 NVMe slots (M-key 2280/22110) |
| Expansion Slots | Default <ul style="list-style-type: none"> • 2 PCIe 4.0 x16 HHHL slots |
| On-Board Devices | SATA: SATA (6Gbps) via Intel® C621A; RAID 0/1/5/10 support(Intel® VROC RAID key required) Chipset: Intel® C621A Network Connectivity: 2 SFP+ 10GbE with Intel® X710-BM2 |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 SFP+ 10 GbE LAN ports (IPMI shared on LAN port 1) USB: 2 USB 3.2 Gen1 Type-A ports(rear) Video: 1 VGA port(Rear) |

(Front View – System)

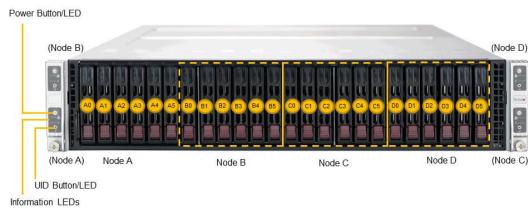

(Rear View – System)

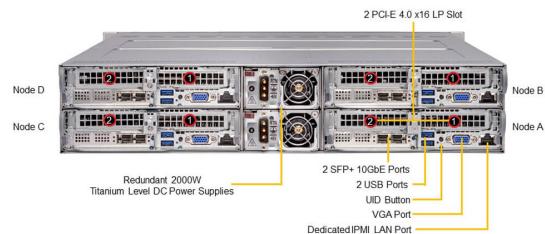**System Cooling**

Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control 80x80x38mm Fan(s)
 Air Shroud: 4 Air Shrouds

Power Supply

2x 2000W Redundant (1 + 1) power supplies

System BIOS

BIOS Type: AMI 32MB UEFI

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory
 FAN: Fans with tachometer monitoring
 Status monitor for speed control
 Pulse Width Modulated (PWM) fan connectors
 Temperature: Monitoring for CPU and chassis environment
 CPU thermal trip support, PEPI

Dimensions and Weight

Weight: Gross Weight: 90 lbs (40.8 kg)
 Net Weight: 70 lbs (31.8 kg)
 Available Color: Black front & silver body

Operating Environment

RoHS Compliant
 Operating Temperature: 0°C to 35°C (32°F to 95°F)
 Non-operating Temperature: 0°C to 70°C (32°F to 140°F)
 Operating Relative Humidity: 8% to 90% (non-condensing)
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[**Super X12SPT-PT**](#)

Chassis

CSE-217HQ+-000NBP4