



More details here

MP SuperServer SYS-240P-TNRT


2U 4-socket system with 48 DIMMs and 24 NVMe/SAS/SATA drive bays

Key Applications

Artificial Intelligence (AI), Business Intelligence, ERP, CRM, Scientific Virtualization, In-Memory Database, HCI, SAP HANA,

Key Features

- Quad Socket P+ (LGA-4189) 3rd Generation Intel® Xeon® Scalable processors;
- 48 DIMMs; Up to 18TB 3DS ECC DDR4-3200:LRDIMM/RDIMM/Intel® Intel® DCPMM;
- Intel® Ethernet Controller X710-TM4 2x 10G RJ45 + 2x 10G SFP+ port; (optional) AIOM up to 100G QSFP28;
- Up to 24 Hot-swap 2.5" NVMe/SAS3/SATA3 drive bays (Default with 8 SAS3/SATA3 drive bays); Onboard 2x M.2 SATA.;
- 4 heavy duty fans w/ optimal fan speed control; 1 Air Shroud;

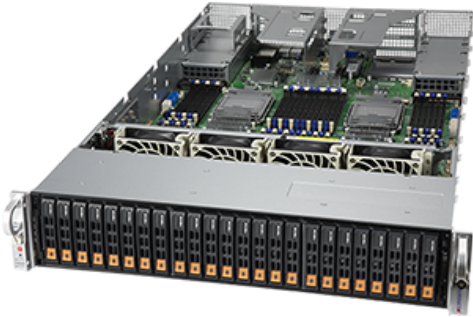

Form Factor	2U Rackmount Enclosure: 439.5 x 89 x 803mm (17.3" x 3.5" x 31.6") Package: 672 x 250 x 1100mm (26.5" x 9.75" x 43.5")
Processor	Quad Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 28C/56T; Up to 38.5MB Cache per CPU
GPU	Max GPU Count: Up to 2 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: RTX A6000, RTX 4000, A16
System Memory	Slot Count: 48 DIMM slots Max Memory (2DPC): Up to 12TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none"> • 8 front hot-swap 2.5" SATA drive bays Option A: Total 24 bays <ul style="list-style-type: none"> • 24 front hot-swap 2.5" NVMe*/SAS*/SATA* drive bays (*NVMe/SAS/SATA support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe/SATA slots (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none"> • 2 PCIe 3.0 x16 FHHL slots • 4 PCIe 3.0 x8 (in x16) FHFL slots • 1 PCIe 3.0 x16 (in x16) AIOM slot (OCP 3.0 compatible)
On-Board Devices	Chipset: Intel® C621 Network Connectivity: 2 RJ45 10GBASE-T with Intel® X710-TM4 2 SFP+ 10GbE with Intel® X710-TM4 IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GbE LAN ports 2 SFP+ 10 GbE LAN ports USB: 2 USB 3.0 ports(rear) Serial: 1 COM port(Rear)



System Cooling	<p>Fans: Up to 4x 8cm heavy duty fans with optimal fan speed control</p> <p>Air Shroud: 8 Air Shrouds</p>
Power Supply	2x 2000W Redundant (1 + 1) Titanium Level (96%) Hot-plug power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	<p>SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!; IPMICFG; SMCIPMITool; IPMIView</p>
PC Health Monitoring	<p>CPU: Monitors for CPU Cores, Chipset Voltages, Memory</p> <p>4+1 Phase-switching voltage regulator</p> <p>FAN: Fans with tachometer monitoring</p> <p>Status monitor for speed control</p> <p>Pulse Width Modulated (PWM) fan connectors</p> <p>Temperature: Monitoring for CPU and chassis environment</p> <p>Thermal Control for fan connectors</p>
Dimensions and Weight	<p>Weight: Gross Weight: 71.5 lbs (32.43 kg)</p> <p>Net Weight: 45.5 lbs (20.64 kg)</p> <p>Available Color: Black</p>
Operating Environment	<p>RoHS Compliant</p> <p>Operating Temperature: 10°C to 35°C (50°F to 95°F)</p> <p>Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)</p> <p>Operating Relative Humidity: 8% to 90% (Non-Condensing)</p> <p>Non-operating Relative Humidity: 5% to 95% (Non-Condensing)</p>
Motherboard	Super X12QCH+
Chassis	CSE-218HTS-R2K08P