

A+ Server®

AS -1116CS-TN

USER'S MANUAL

Revision 1.0b MNL-2761

The information in this User's Manual has been carefully reviewed and is believed to be accurate. The vendor assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the information in this manual, or to notify any person or organization of the updates. Note: For the most up-to-date version of this manual, see our website at https://www.supermicro.com.

Super Micro Computer, Inc. ("Supermicro") reserves the right to make changes to the product described in this manual at any time and without notice. This product, including software and documentation, is the property of Supermicro and/or its licensors, and is supplied only under a license. Any use or reproduction of this product is not allowed, except as expressly permitted by the terms of said license.

IN NO EVENT WILL Super Micro Computer, Inc. BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, SPECULATIVE OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OR INABILITY TO USE THIS PRODUCT OR DOCUMENTATION, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN PARTICULAR, SUPER MICRO COMPUTER, INC. SHALL NOT HAVE LIABILITY FOR ANY HARDWARE, SOFTWARE, OR DATA STORED OR USED WITH THE PRODUCT, INCLUDING THE COSTS OF REPAIRING, REPLACING, INTEGRATING, INSTALLING OR RECOVERING SUCH HARDWARE, SOFTWARE, OR DATA.

Any disputes arising between manufacturer and customer shall be governed by the laws of Santa Clara County in the State of California, USA. The State of California, County of Santa Clara shall be the exclusive venue for the resolution of any such disputes. Supermicro's total liability for all claims will not exceed the price paid for the hardware product.

FCC Statement: This equipment has been tested and found to comply with the limits for a Class A or Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in industrial environment for Class A device or in residential environment for Class B device. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the manufacturer's instruction manual, may cause harmful interference with radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case you will be required to correct the interference at your own expense.

California Best Management Practices Regulations for Perchlorate Materials: This Perchlorate warning applies only to products containing CR (Manganese Dioxide) Lithium coin cells. "Perchlorate Material-special handling may apply. See https://www.dtsc.ca.gov/hazardouswaste/perchlorate".



WARNING: This product can expose you to chemicals including lead, known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to https://www.P65Warnings.ca.gov.



AVERTISSEMENT : Ce produit peut vous exposer à des agents chimiques, y compris le plomb, identifié par l'État de Californie comme pouvant causer le cancer, des malformations congénitales ou d'autres troubles de la reproduction. Pour de plus amples informations, prière de consulter https://www.P65Warnings.ca.gov.

The products sold by Supermicro are not intended for and will not be used in life support systems, medical equipment, nuclear facilities or systems, aircraft, aircraft devices, aircraft/emergency communication devices or other critical systems whose failure to perform be reasonably expected to result in significant injury or loss of life or catastrophic property damage. Accordingly, Supermicro disclaims any and all liability, and should buyer use or sell such products for use in such ultra-hazardous applications, it does so entirely at its own risk. Furthermore, buyer agrees to fully indemnify, defend and hold Supermicro harmless for and against any and all claims, demands, actions, litigation, and proceedings of any kind arising out of or related to such ultra-hazardous use or sale.

Manual Revision 1.0b

Release Date: September 25, 2025

Unless you request and receive written permission from Super Micro Computer, Inc., you may not copy any part of this document. Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.

Copyright © 2025 by Super Micro Computer, Inc.
All rights reserved.
Published in the United States of America

Preface

About This Manual

This manual is written for professional system integrators and PC technicians. It provides information for the installation and use of the AS -1116CS-TN server. Installation and maintenance should be performed by certified service technicians only.

Notes

For your system to work properly, follow the links below to download all necessary drivers/utilities and the user's manual for your server.

- Supermicro product manuals: https://www.supermicro.com/support/manuals
- Product drivers and utilities: https://www.supermicro.com/wdl
- Product safety info: https://www.supermicro.com/about/policies/safety_information.cfm
- A secure data deletion tool designed to fully erase all data from storage devices can be found on our website: https://www.supermicro.com/about/policies/disclaimer.cfm?url=/wdl/utility/Lot9_Secure_Data_Deletion_Utility
- Frequently Asked Questions: https://www.supermicro.com/FAQ/index.php
- If you still have questions after referring to our FAQs, contact our support team. Region-specific Technical Support email addresses can be found at: "Contacting Supermicro" on page 11
- If you have any feedback on Supermicro product manuals, contact our writing team at: Techwriterteam@supermicro.com

This manual may be periodically updated without notice. Check the Supermicro website for possible updates to the manual revision level.

Conventions Used in the Manual

Special attention should be given to the following symbols for proper installation and to prevent damage done to the components or injury to yourself.



Warning! Indicates important information given to prevent equipment/property damage or personal injury.



Warning! Indicates high voltage may be encountered while performing a procedure.

Important: Important information given to ensure proper server installation or to relay safety precautions.

Note: Additional information given to differentiate various models or to provide information for proper server setup.

Contents

Contacting Supermicro ***11***
Chapter 1: Introduction ***12***
1.1 Overview 13
1.2 System Features 15
Front View 15
Drive Carriers 16
Control Panel 17
Rear View 19
1.3 System Architecture 20
Main Components 20
System Block Diagram 21
1.4 Motherboard Quick Reference 22
Motherboard Layout 22
Quick Reference 25
Chapter 2: Server Installation ***27***
2.1 Unpacking the System 28
2.2 Preparing for Setup 29
Choosing a Setup Location 29
Rack Precautions 29
System Precautions 29
Rack Mounting Considerations 30
Ambient Operating Temperature 31
Airflow 31
Mechanical Loading 31
Circuit Overloading 31
Reliable Ground 31
2.3 Installing the Chassis into the Rack 32
Identifying the Rails 33
Releasing the Inner Rail 34
Installing the Outer Rails onto the Rack 35
Installing the Inner Rails onto the Chassis 36

2.4 Installing the Chassis into the Rack 37
Removing the Chassis from the Rack 38
Removing the Outer Rails from the Rack 39
Releasing the Outer Rails 39
Chapter 3: Maintenance and Component Installation 40
3.1 Removing Power 42
3.2 Accessing the System 43
Removing the Chassis Cover 43
3.3 Static-Sensitive Devices 44
Precautions 44
3.4 Processor and Heatsink Installation 45
Preparing the Processor Socket 45
Installing the Processor into the Frame 47
Installing the Heatsink 50
Uninstalling the Heatsink and Processor 51
3.5 Memory Support and Installation 53
Memory Support 53
General Guidelines for Optimizing Memory Performance 54
DIMM Population 54
DIMM Installation 56
DIMM Removal 58
3.6 Motherboard Battery Removal and Installation 59
Battery Removal 59
Proper Battery Disposal 59
Battery Installation 59
3.7 Storage Drives 60
Removing Hot-Swap Drive Carriers from the Chassis 60
Installing a Drive 60
Hot-Swap for NVMe Drives 62
Ejecting a Drive 62
Replacing a Drive 62
3.8 System Cooling 63
Fans 63
Changing a System Fan 63

Air Shrouds 64
Installing an Air Shroud 64
3.9 Expansion Cards 65
AIOM Cards 65
3.10 Power Supply 66
Replacing the Power Supply 66
3.11 Cable Routing Diagrams 67
Configurations 67
12 NVMe 68
8 NVMe 69
12 SATA 70
8 SATA 71
12 SAS 72
8 SAS 73
Chapter 4: Motherboard Connections, Jumpers, and LEDs 74
4.1 Power Supply and Power Connections 75
Power Connectors 75
Management Connector 75
4.2 Headers and Connections 77
Chassis Intrusion 77
Front Control Panel Connector 77
Power Button 78
Unit Identifier (UID) Button 78
UID LED 78
Information LED 78
LAN1/LAN2 (NIC1/NIC2) LED 79
Storage Drive Activity LED 79
Front Panel Power LED 79
Front Panel I2C 80
Power Fail LED Indicators 80
External BMC I²C Header 80
External BMC I²C Header for Backplane 80
NVMe I²C Hot-Swap Header 81
Leakage Detection Sensor Connectors 81

M.2 Boot Tray Connector 82
MCIO PCIe 5.0 x8 Connectors 82
Modular Extensible I/O PCIe Connectors 82
NC-SI Connection 82
4.3 Jumper Settings 83
CMOS Clear 83
4.4 LED Indicators 85
Onboard Power LED 85
Chapter 5: Software ***86***
5.1 Microsoft Windows OS Installation 87
Installing the OS 87
5.2 Driver Installation 89
5.3 BMC 90
BMC ADMIN User Password 90
Chapter 6: Optional Components ***91***
6.1 Storage Protocols Supported 92
6.2 Storage Control Cards 93
6.3 Configuration Ordering Information 94
8 Drive Bay Configurations 94
12 Drive Bay Configurations 95
6.4 TPM Security Module 96
6.5 Power Supply Modules 97
Chapter 7: Troubleshooting and Support ***98***
7.1 Online Resources 99
Direct Links for the AS -1116CS-TN System 99
Direct Links for General Support and Information 99
7.2 Baseboard Management Controller (BMC) 100
7.3 Troubleshooting Procedures 101
Before Power On 101
No Power 101
No Video 101
System Boot Failure 101
Memory Errors 102
Losing the System's Setup Configuration 102

If the System Becomes Unstable 102
7.4 CMOS Clear 104
7.5 Motherboard Battery 105
7.6 Where to Get Replacement Components 106
7.7 Technical Support Procedures 107
Returning Merchandise for Service 107
7.8 Feedback 109
Chapter 8: UEFI BIOS ***110***
8.1 Introduction 111
Updating BIOS 111
Starting the Setup Utility 111
8.2 Main Setup 113
8.3 Advanced Setup Configurations 115
Boot Feature Menu 116
CPU Configuration Menu 117
NB Configuration 119
ACPI Settings Menu 122
Super IO Configuration Menu 123
Serial Port 1 Configuration Menu 123
Serial Port 2 Configuration Menu 123
Serial Port Console Redirection Menu 124
PCIe/PCI/PnP Configuration Menu 127
USB Configuration 129
Network Configuration Menu 130
SATA Configuration Menu 132
HTTP Boot Configuration Menu 132
Supermicro KMS Server Configuration Menu 133
Super-Guardians Configuration Menu 135
TLS Authenticate Configuration Menu 137
RAM Disk Configuration 138
8.4 BMC 139
System Event Log Menu 139
BMC Network Configuration Menu 140
8.5 Event Logs 143

8.6 Security 145
8.7 Boot 147
8.8 Save & Exit 149
Appendix A: BIOS Codes ***151***
BIOS Error POST (Beep) Codes 151
Additional BIOS POST Codes 151
Appendix B: Standardized Warning Statements for AC Systems ***152***
Warning Definition 152
Installation Instructions 154
Circuit Breaker 156
Power Disconnection Warning 157
Equipment Installation 159
Rack Stability Hazard 160
Restricted Area 162
Battery Handling 164
Redundant Power Supplies 165
Backplane Voltage 167
Comply with Local and National Electrical Codes 168
Product Disposal 169
Fan Warning 171
Power Cable and AC Adapter 173
Appendix C: System Specifications ***176***
Power Supply Options 179
Appendix D: Particulate and Gaseous Contamination Limits ***180***
Particulate Contamination Specifications 180
Gaseous Contamination Specifications 180
Appendix E: Statement of Volatility (SOV) ***181***

Contacting Supermicro

Headquarters

Address:	Super Micro Computer, Inc. 980 Rock Ave. San Jose, CA 95131 U.S.A.
Tel:	+1 (408) 503-8000
Fax:	+1 (408) 503-8008
Email:	Marketing@supermicro.com (General Information) Sales-USA@supermicro.com (Sales Inquiries) Government_Sales-USA@supermicro.com (Gov. Sales Inquiries) Support@supermicro.com (Technical Support) RMA@Supermicro.com (RMA Support) Webmaster@supermicro.com (Webmaster)
Website:	https://www.supermicro.com

Europe

Address:	Super Micro Computer B.V. Het Sterrenbeeld 28, 5215 ML 's-Hertogenbosch, The Netherlands
Tel:	+31 (0) 73-6400390
Fax:	+31 (0) 73-6416525
Email:	Sales_Europe@supermicro.com (Sales Inquiries) Support_Europe@supermicro.com (Technical Support) RMA_Europe@supermicro.com (RMA Support)
Website:	https://www.supermicro.nl

Asia-Pacific

Address:	Super Micro Computer, Inc. 3F, No. 150, Jian 1st Rd. Zhonghe Dist., New Taipei City 235 Taiwan (R.O.C)
Tel:	+886 (2) 8226-3990
Fax:	+886 (2) 8226-3992
Email:	Sales-Asia@supermicro.com.tw (Sales Inquiries) Support@supermicro.com.tw (Technical Support) RMA@supermicro.com.tw (RMA Support)
Website:	https://www.supermicro.com.tw

Chapter 1:

Introduction

This chapter provides a brief outline of the functions and features of the AS -1116CS-TN system. It is based on the H14SHM motherboard and the CSE-MD101TS-R000NDP chassis.

1.1 Overview **13**
1.2 System Features **15**
Front View 15
Rear View 19
1.3 System Architecture **20**
Main Components 20
System Block Diagram 21
1.4 Motherboard Quick Reference **22**
Motherboard Layout 22
Quick Reference 25

1.1 Overview

This chapter provides a brief outline of the functions and features of the AS -1116CS-TN. The following provides an overview of the specifications and capabilities.

System Overview	
Motherboard	H14SHM
Chassis	CSE-MD101TS-R000NDP
Processor	Single AMD EPYC™ 9005/9004-series in socket SP5 and a Thermal Design Power (TDP) up to 500 W **Note:** Dependent on thermal validation and system configuration. Contact a Supermicro representative for details.
Memory	12 DIMM slots with 1DPC supporting up to 3 TB registered ECC DDR5/3DS RDIMM at 6400 MT/s (AMD EPYC™ 9005-series processor) or 3 TB of ECC DDR5/3DS RDIMM at 4800 MT/s (AMD EPYC™ 9004-series processor), both in Socket SP5 **Note:** Memory speed support depends on the processor used in the system. For details, refer to "Memory Support and Installation" on page 53.
Drive Support	Up to 12 2.5" front hot-swap NVMe/SAS/SATA drive bays (drive options require additional parts) Up to two M.2 NVMe PCIe 3.0 x4 M-key slots in 2280 (default) or 22110 form factors **Note:** M.2 support requires an optional M.2 adapter card
Expansion Slots	Two PCIe 5.0 x16 FHHL slots One PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)
I/O Ports	One RJ45 1 GbE dedicated BMC LAN port (via DC-SCM) One USB 3 2. Gen1 Type-A port (via DC-SCM) One USB 2.0 Type-A port (via DC-SCM) One VGA port (via DC-SCM)
System Cooling	Up to eight counter-rotating 40 x 4 x 56-mm fans One air shroud
Power	Selectable dual redundant power supplies 1000 W/2000 W CRPS (Titanium Level) redundant power supplies **Note:** Full redundancy based on configuration and application load
Form Factor	1U rackmount; (WxHxD) 17.2" x 1.7" x 29.4" (437 x 43 x 747 mm)

Notes:

- A Quick Reference Guide can be found on the following page of the Supermicro website:https://www.supermicro.com/en/products/system/clouddc/1u/as-1116cs-tn
- The following safety models associated with the AS -1116CS-TN have been certified as compliant with UL or CSA: MD101-R10H14, MD101-10, MD101-R20H14, MD101-20, MD101-R16H14, MD101-16

1.2 System Features

The following views of the system display the main features. Refer to the System Specifications appendix of this manual for additional specifications.

Front View

The following features are located on the front of the AS -1116CS-TN server.



Figure 1-1. AS -1116CS-TN Front View

System Features: Front	
Feature	**Description**
Control Panel	One control panel with a power button, UID button, and status LEDs
Service Tag	One pull-out service tag with the BMC admin password
Storage I/O Bay	Additional storage I/O bays

Storage Drive Numbers	
Drive Bay	**Description**
0–7	Eight hot-swap 2.5" NVMe/SATA/SAS drive bays
8–11	Optional four hot-swap 2.5" NVMe/SATA/SAS drive bays*
NVMe/SATA/SAS support requires additional parts. See "Cable Routing Diagrams" on page 1 for optional configurations and part numbers. ***Additional parts are needed for optional four drive support.**	

Drive Carriers

Each drive carrier has two LED indicators: an activity indicator and a status indicator. For RAID configurations using a controller, the meaning of the status indicator is described in the table below. For OS RAID or non-RAID configurations, some LED indications are not supported, such as hot spare.

Drive Carrier LED Indicators			
	Color	**Blinking Pattern**	**Behavior for Device**
Activity LED	Blue	Solid On	Idle SAS/NVMe drive installed
	Blue	Blinking	I/O Activity
	Off		Idle SATA drive installed
Status LED	Red	Solid On	Drive failure
	Red	Blinking at 1 Hz	Rebuilding drive
	Red	Blinking with two blinks and one stop at 1 Hz	Hot spare for drive
	Red	On for five seconds, then off	Power on for drive
	Red	Blinking at 4 Hz	Identify drive
	Green	Solid On	Save to remove in NVMe device
	Amber	Blinking at 1 Hz	Do not remove NVMe drive

Control Panel

The following switches and LEDs are located on the AS -1116CS-TN server control panel.

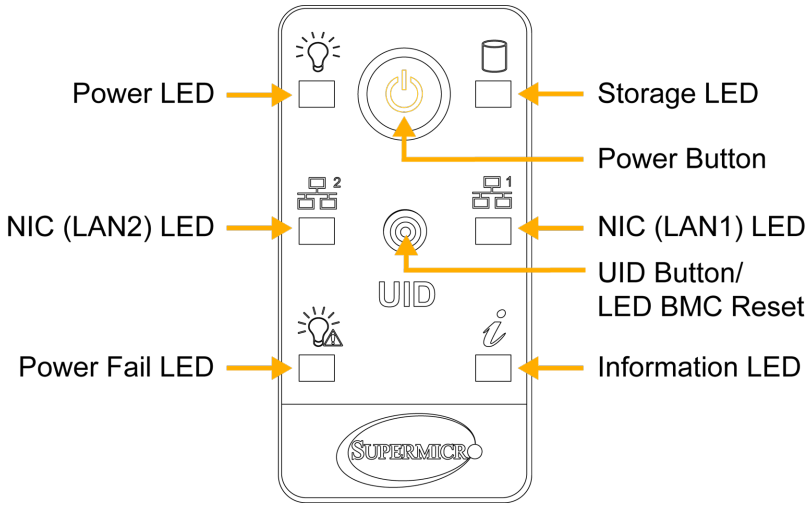


Figure 1-2. AS -1116CS-TN Control Panel

Control Panel Features	
Feature	**Description**
Power Button	The main power switch applies or removes primary power from the power supply to the server but maintains standby power.
UID Button	The unit identification (UID) button turns on or off the blue light function of the Information LED and a blue LED on the rear of the chassis.
Power LED	Indicates power is being supplied to the system power supply units. This LED is illuminated when the system is operating normally. Steady on: Power on. Blinking at 4 Hz: Checking BIOS/BMC integrity. Blinking at 4 Hz with blue Information LED: BIOS firmware is updating. Two blinks at 4 Hz and one pause 2 Hz with blue Information LED: BMC firmware is updating. Blinking at 1 Hz with red Information LED: Fault detected.
Storage LED	Indicates activity on the storage drives when flashing.
NIC1 LED	Indicates network activity on odd-numbered AIOM ports when flashing.
NIC2 LED	Indicates network activity on even-numbered AIOM ports when flashing.
Power Fail LED	Indicates a power supply module has failed.
Information LED	Alerts the operator to several states as noted in the table below.

Information LED	
Color, Status	**Description**
Red, solid	An overheat condition has occurred.
Red, blinking at 1 Hz	Fan failure; check for an inoperative fan.
Red, blinking at 0.25 Hz	Power failure; check for an inoperative power supply.
Red, solid with Power LED blinking green	Fault detected.
Blue and red, blinking at 10 Hz	Recovery mode.
Blue, solid	UID has been activated locally to locate the server in a rack environment.
Blue, blinking at 1 Hz	UID has been activated via BMC to locate the server in a rack environment.
Blue, blinking at 2 Hz	BMC is resetting.
Blue, blinking at 4 Hz	BMC is setting factory defaults.
Blue, blinking at 10 Hz with Power LED blinking green	BMC/BIOS firmware is updating.

Rear View

The following features are located on the rear of the AS -1116CS-TN server.

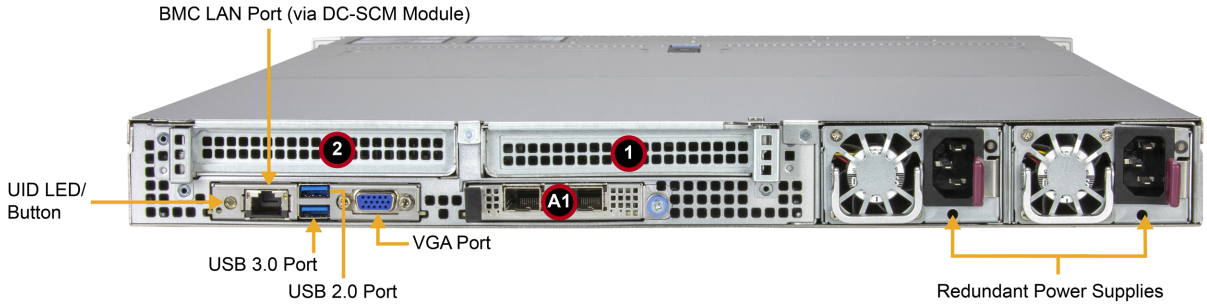


Figure 1-3. AS -1116CS-TN Rear View

System Features: Rear	
Feature	**Description**
UID Button/LED	One UID button/LED on the DC-SCM module
BMC LAN Port	One 1 GbE RJ45 dedicated BMC LAN port, via DC-SCM module
USB 2.0 Port	One USB 2.0 Type-A port, via DC-SCM module
USB 3.0 Ports	One USB 3.2 Gen1 Type-A port, via DC-SCM module
VGA Port	One VGA port, via DC-SCM module
Redundant Power Supplies	Two redundant power supplies, 80Plus Titanium Level

PCIe Slots	
Item	**Description**
1–2	PCIe 5.0 x16 FHHL
A1	PCIe 5.0 x16 AIOM (OCP 3.0 compatible)

1.3 System Architecture

This section covers the locations of the system's main components and provides a system block diagram.

Main Components

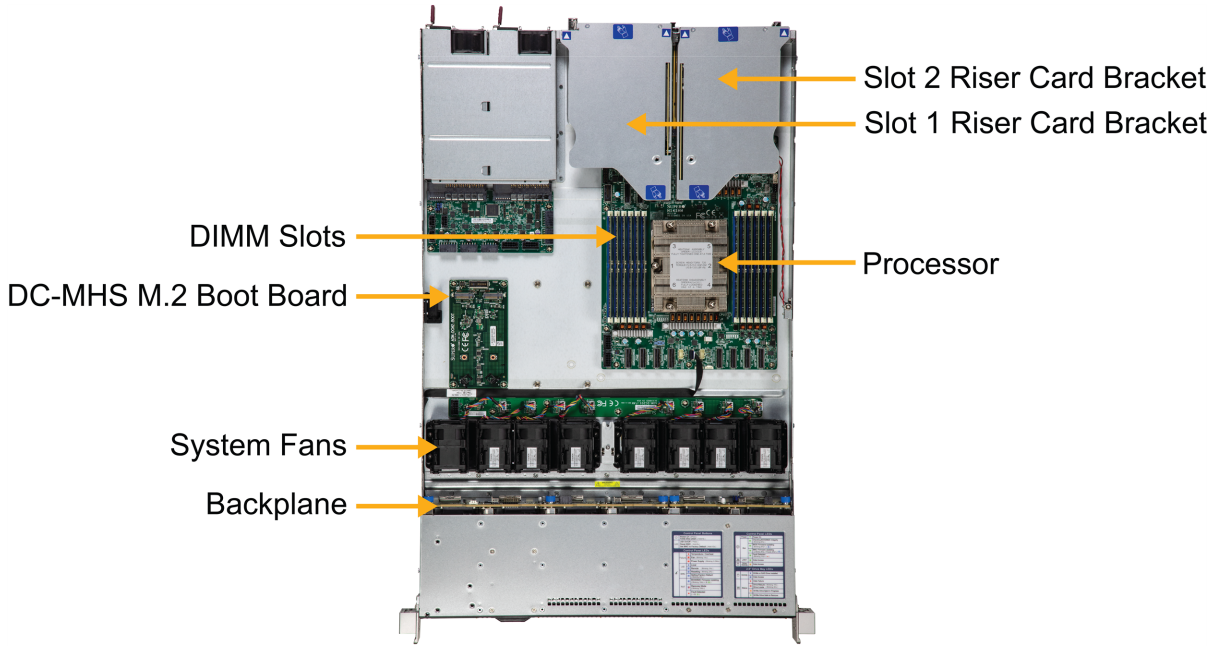


Figure 1-4. AS -1116CS-TN Main Component Locations

System Features: Top	
Feature	**Description**
DIMM Slots	12 DDR5 DIMM slots
DC-MHS M.2 Boot Board	Two M.2 NVMe slots (optional)
System Fans	Up to eight internal fans
Processor	AMD EPYC™ 9005/9004-series processor in SP5 socket
Backplane	Default: One BPN-NVME5-HS119N-S8L, eight NVMe/SATA/SAS storage device backplanes Optional: One BPN-NVME5-HS119N-S4R, which supports four additional NVMe/SATA/SAS storage devices
Slot 1 Riser Card Bracket	Riser card bracket for one PCIe slot with riser card RSC-MR-6G5-UP
Slot 2 Riser Card Bracket	Riser card bracket for one PCIe slot with riser card RSC-M-6G5-UP

System Block Diagram

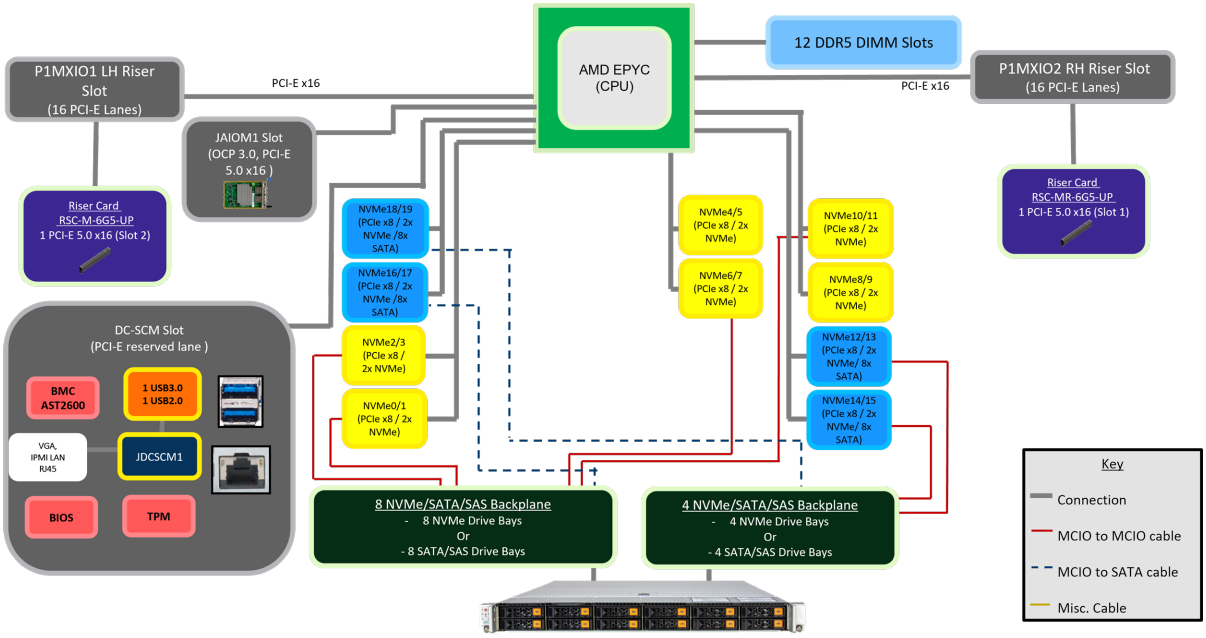


Figure 1-5. System Block Diagram

1.4 Motherboard Quick Reference

For details on the H14SHM motherboard layout and other quick reference information, refer to the content below.

Motherboard Layout

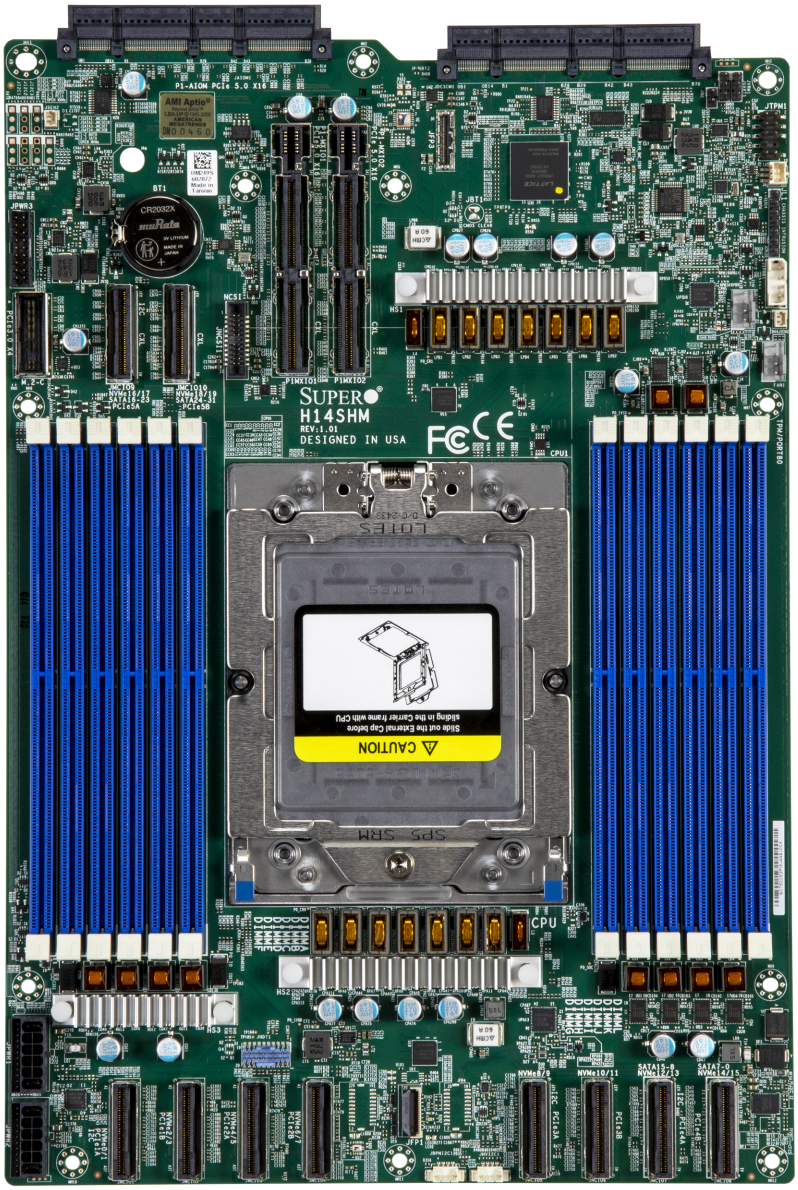


Figure 1-6. Motherboard Image

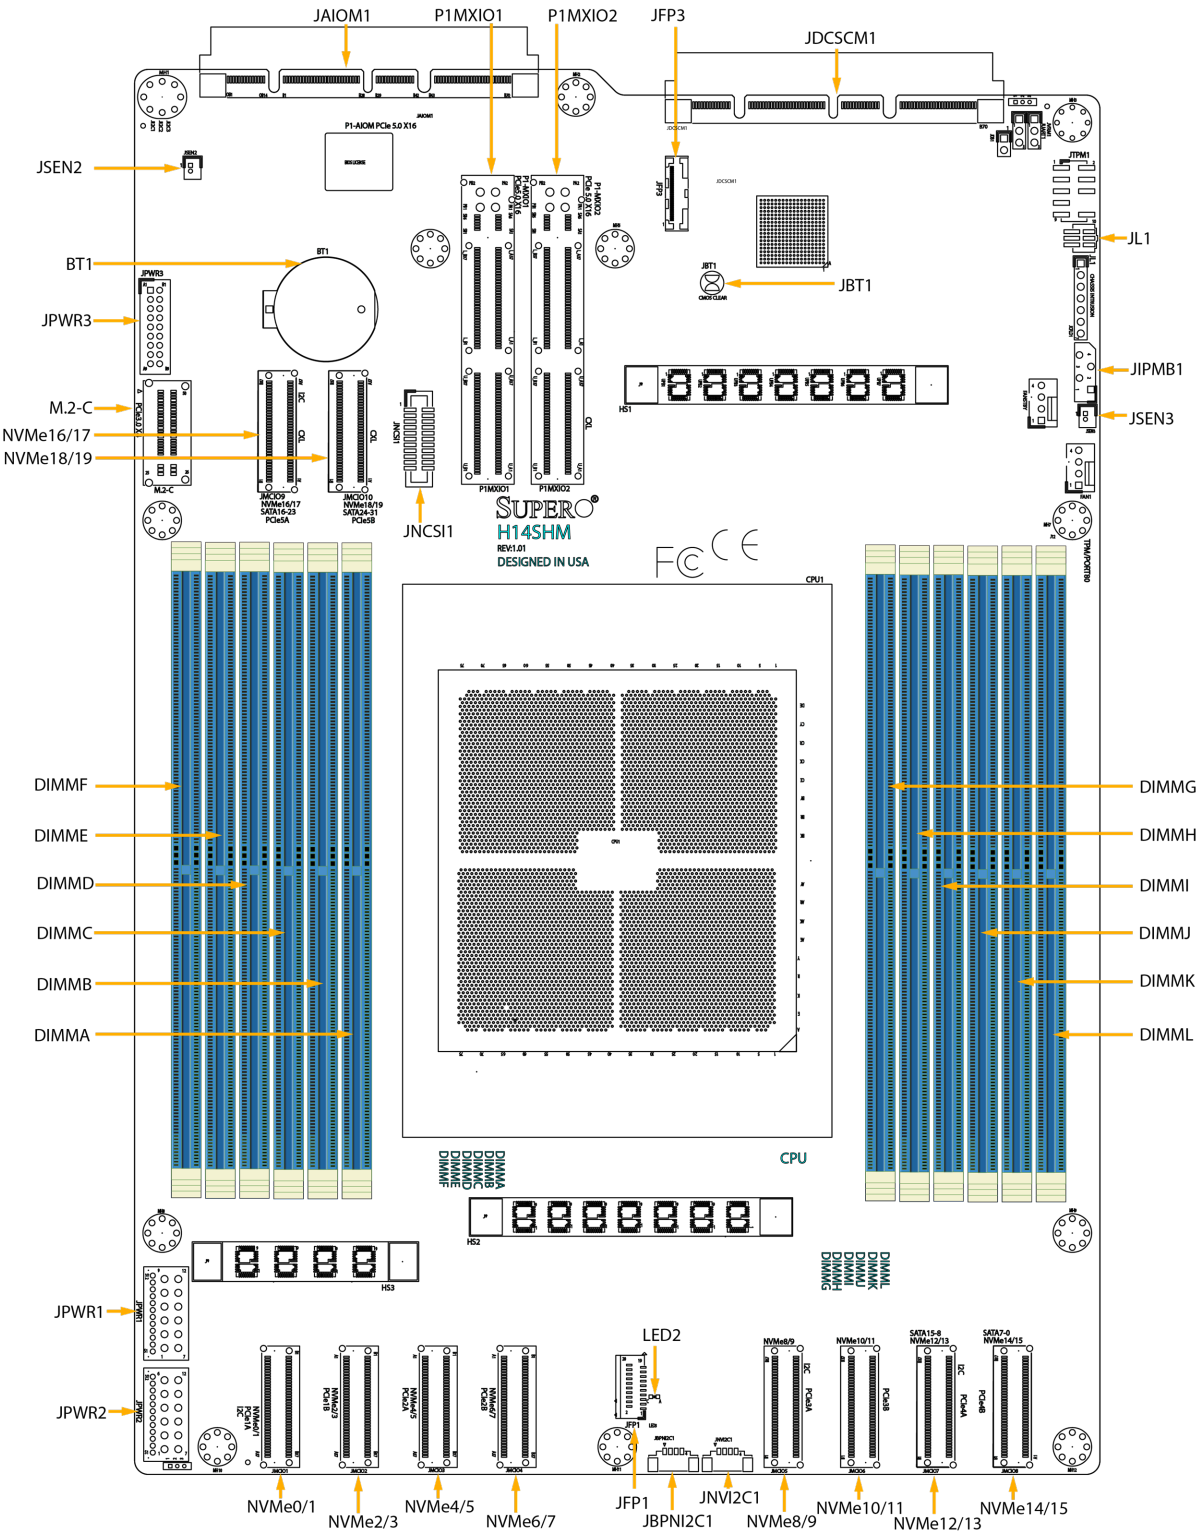


Figure 1-7. Motherboard Layout

Notes:

- For detailed information on jumpers, connectors, and LED indicators, see Component Installation.
- "■" indicates the location of pin 1.
- "MH" indicates the location of a mounting hole.
- Components not documented are for internal testing purposes only.
- Use only the correct type of onboard CMOS battery as specified by the manufacturer. To avoid possible explosion, do not install the onboard battery upside down.

Quick Reference

Jumper	Description	Default Setting
JBT1	CMOS Clear	Open (Normal)

LED	Description	Status
LED2	Power	Indicates normal power

Connector	Description
BT1	Onboard battery
DIMMA-L	Twelve memory module slots
JAIOM1	Supermicro Advanced Input/Output Module (AIOM) PCIe 5.0 x16 connector
JBPNI2C1	BMC external I²C header for backplane
JDCSCM1	DC-SCM connector; connect to the server management and security module.
JFP1	Front Control Panel Connector
JFP3	Front Panel Connector for DisplayPort and USB2.0
JIPMB1	External BMC I²C header
JL1	Chassis intrusion header
JNVI2C1	I²C header for NVMe backplane hot-swap support
JNCSI1	NC-SI connector
JPWR1,2	12 V 24-pin motherboard power connector with sideband control signals
JPWR3	18-pin management connector with 12 V standby power
JSEN2, 3	2-pin leak detection sensors for Liquid Cooling Module
M.2-C	M.2 PCIe 3.0 interface for M.2 carrier (NVMe only)
NVMe0/1 PCIe1A	NVMe ports 0/1, PCIe port 1A
NVMe2/3 PCIe1B	NVMe ports 2/3, PCIe port 1B
NVMe4/5 PCIe2A	NVMe ports 4/5, PCIe port 2A
NVMe6/7 PCIe2B	NVMe ports 6/7, PCIe port 2B
NVMe8/9 PCIe3A	NVMe ports 8/9, PCIe port 3A

Connector	Description
NVMe10/11 PCIe3B	NVMe ports 10/11, PCIe port 3B
NVMe12/13 PCIe4A SATA15-8	NVMe ports 12/13, PCIe port 4A, SATA ports 15-8
NVMe14/15 PCIe4B SATA7-0	NVMe ports 14/15, PCIe port 4B, SATA ports 7-0
NVMe16/17 PCIe5A SATA16-23	NVMe ports 16/17, PCIe port 5A, SATA ports 16-23
NVMe18/19 PCIe5B SATA24-31	NVMe ports 18/19, PCIe port 5B, SATA ports 24-31
P1MXIO1,2	Modular-Extensible I/O connector, PCIe 5.0 x16

Chapter 2:

Server Installation

This chapter provides advice and instructions for mounting your server in a server rack. If your server is not already fully integrated with processors, system memory, etc., refer to "Maintenance and Component Installation" on page 40 for details on installing those specific components.

Important: Electrostatic Discharge (ESD) can damage electronic components. To prevent such damage to printed circuit boards (PCBs), it is important to use a grounded wrist strap, handle all PCBs by their edges, and keep PCBs in anti-static bags when not in use.

2.1 Unpacking the System **28**
2.2 Preparing for Setup **29**
Choosing a Setup Location 29
Rack Precautions 29
System Precautions 29
Rack Mounting Considerations 30
2.3 Installing the Chassis into the Rack **32**
Identifying the Rails 33
Releasing the Inner Rail 34
Installing the Outer Rails onto the Rack 35
2.4 Installing the Chassis into the Rack **37**
Removing the Chassis from the Rack 38
Removing the Outer Rails from the Rack 39

2.1 Unpacking the System

Inspect the box the AS -1116CS-TN server was shipped in and note if it was damaged in any way. If any equipment appears damaged, file a damage claim with the carrier who delivered it.

Decide on a suitable location for the rack unit that will hold the server. It should be situated in a clean, dust-free area that is well ventilated. Avoid areas where heat, electrical noise and electromagnetic fields are generated. It will also require a grounded AC power outlet nearby. Be sure to read the precautions and considerations noted in "Standardized Warning Statements for AC Systems" on page 152.

2.2 Preparing for Setup

The box in which the AS -1116CS-TN server was shipped should include the rackmount hardware needed to install it into the rack. Read this section in its entirety before you begin the installation.

Choosing a Setup Location

- The server should be situated in a clean, dust-free area that is well ventilated. Avoid areas where heat, electrical noise and electromagnetic fields are generated.
- Leave enough clearance in front of the rack so that you can open the front door completely (~25 inches) and approximately 30 inches of clearance in the back of the rack to allow sufficient space for airflow and access when servicing.
- This product should be installed only in a Restricted Access Location (dedicated equipment rooms, service closets, etc.).
- This product is not suitable for use with visual display workplace devices according to §2 of the German Ordinance for Work with Visual Display Units.

Rack Precautions

- Ensure that the leveling jacks on the bottom of the rack are extended to the floor so that the full weight of the rack rests on them.
- In single rack installations, stabilizers should be attached to the rack. In multiple rack installations, the racks should be coupled together.
- Always make sure the rack is stable before extending a server or other component from the rack.
- You should extend only one server or component at a time. Extending two or more simultaneously may cause the rack to become unstable.

System Precautions

- Review the electrical and general safety precautions in "Standardized Warning Statements for AC Systems" on page 152.
- Determine the placement of each component in the rack before you install the rails.
- Install the heaviest server components at the bottom of the rack first and then work your way up.

- Use a regulating uninterruptible power supply (UPS) to protect the server from power surges and voltage spikes and to keep your system operating in case of a power failure.
- Allow any drives and power supply modules to cool before touching them.
- When not servicing, always keep the front door of the rack and all covers/panels on the servers closed to maintain proper cooling.

Rack Mounting Considerations



Warning! Stability hazard. The rack may tip over causing serious personal injury. Before extending the rack to the installation position, read the installation instructions. Do not put any load on the slide-rail mounted equipment in the installation position. Do not leave the slide-rail mounted equipment in the installation position.



Avertissement!
Danger d'instabilité. Le rack peut basculer et provoquer des blessures corporelles graves.
Avant d'étendre le rack en position d'installation, lire les instructions d'installation. Ne pas charger l'équipement monté sur rail de glissière en position d'installation. Ne pas laisser l'équipement monté sur rail de glissière en position d'installation.

Important: To prevent bodily injury when mounting or servicing this unit in a rack, you must take special precautions to ensure that the system remains stable. The following guidelines are provided to ensure your safety:

- If this unit is the only unit in the rack, it should be mounted at the bottom of the rack.
- When mounting this unit in a partially filled rack, load the rack from the bottom to the top, placing the heaviest component at the bottom of the rack.
- If the rack is provided with stabilizing devices, install the stabilizers before mounting or servicing the unit in the rack.
- Slide rail mounted equipment is not to be used as a shelf or a workspace.
- Do not pick up the server with the front handles. They are designed to pull the system from a rack only.

Ambient Operating Temperature

If installed in a closed or multi-unit rack assembly, the ambient operating temperature of the rack environment may be greater than the room's ambient temperature. Therefore, consideration should be given to installing the equipment in an environment compatible with the manufacturer's maximum rated ambient temperature (TMRA).

Airflow

Equipment should be mounted into a rack so that the amount of airflow required for safe operation is not compromised.

Mechanical Loading

Equipment should be mounted into a rack so that a hazardous condition does not arise due to uneven mechanical loading.

Circuit Overloading

Consideration should be given to the connection of the equipment to the power supply circuitry and the effect that any possible overloading of circuits might have on overcurrent protection and power supply wiring. Appropriate consideration of equipment nameplate ratings should be used when addressing this concern.

Reliable Ground

A reliable ground must be maintained at all times. To ensure this, the rack itself should be grounded. Particular attention should be given to power supply connections other than the direct connections to the branch circuit (i.e. the use of power strips, etc.).

2.3 Installing the Chassis into the Rack

Once rails are attached to the AS -1116CS-TN server and the rack, you can install the server.

Important: Use caution when mounting or removing the system from the rack. For large systems, at least one other person must assist during installation or removal. Follow the safety recommendations printed on the rails. Depending on the size of the system, you might need to use a lift.

1. Pull the middle rail out of the front of the outer rail, making sure that the ball bearing shuttle is locked at the front of the middle rail.
2. Align the rear of the chassis rails with the middle rails.
3. Push evenly on both sides of the chassis until it clicks into the fully extended position.
4. Depress the locking tabs on both sides of the chassis and push the it fully into the rack. The locking tabs should click.
5. Optional screws may be used to hold the front of the chassis to the rack.

Note: Keep the ball bearing shuttle locked at the front of the middle rail during installation.

Important: This figure is for illustrative purposes only. Always install servers to the bottom of a rack first.

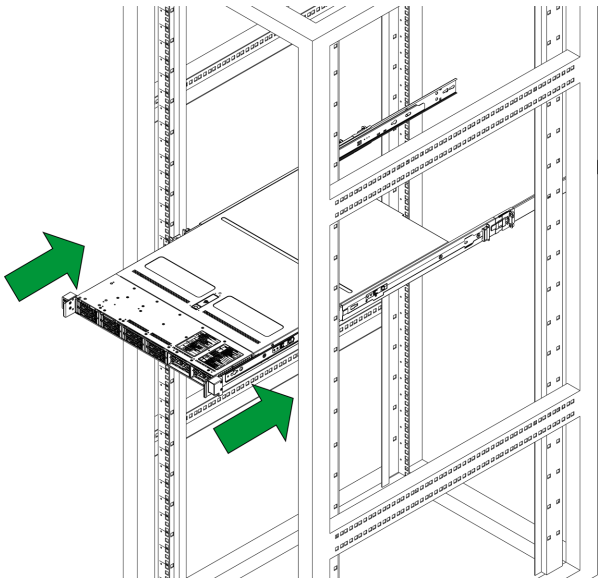


Figure 2-1. Sliding the AS -1116CS-TN into the Rack

Identifying the Rails

The CSE-MD101TS-R000NDP chassis package includes two rail assemblies. Each assembly consists of three sections: an inner rail that secures directly to the chassis, an outer rail that secures to the rack, and a middle rail which extends from the outer rail. These assemblies are specifically designed for the left and right side of the chassis and labeled.

Note: Both front chassis rails and the rack rails have a locking tab, which serves two functions. First, it locks the chassis into place when installed and pushed fully into the rack (its normal operating position). In addition, these tabs lock the chassis in place when fully extended from the rack. This prevents the chassis from coming completely out of the rack when pulled out for servicing.

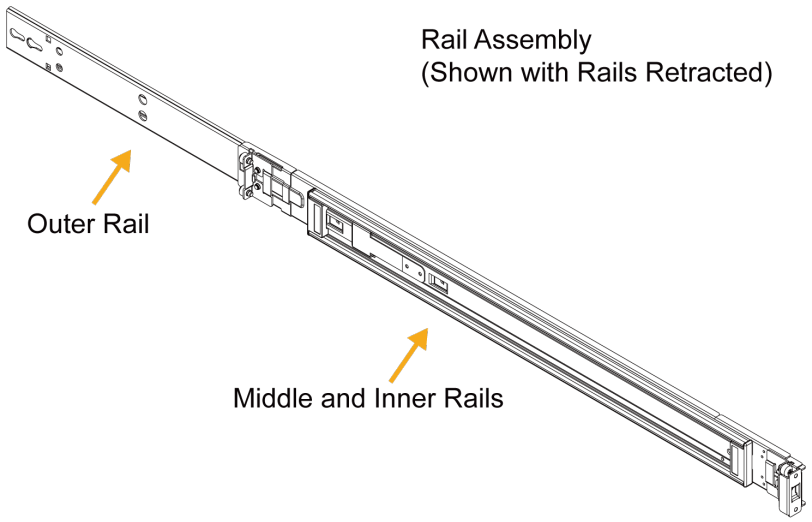


Figure 2-2. Identifying the Outer, Middle, and Inner Rails (Left Rail Assembly Shown)

Releasing the Inner Rail

Each inner rail has a locking latch. This latch prevents the CSE-MD101TS-R000NDP chassis from coming completely out of the rack when the chassis is pulled out for servicing.

To mount the rail onto the chassis, first release the inner rail from the outer rails.

1. Pull the inner rail out of the outer rail until it is fully extended as illustrated below.
2. Press the locking tab down to release the inner rail.
3. Pull the inner rail all the way out.

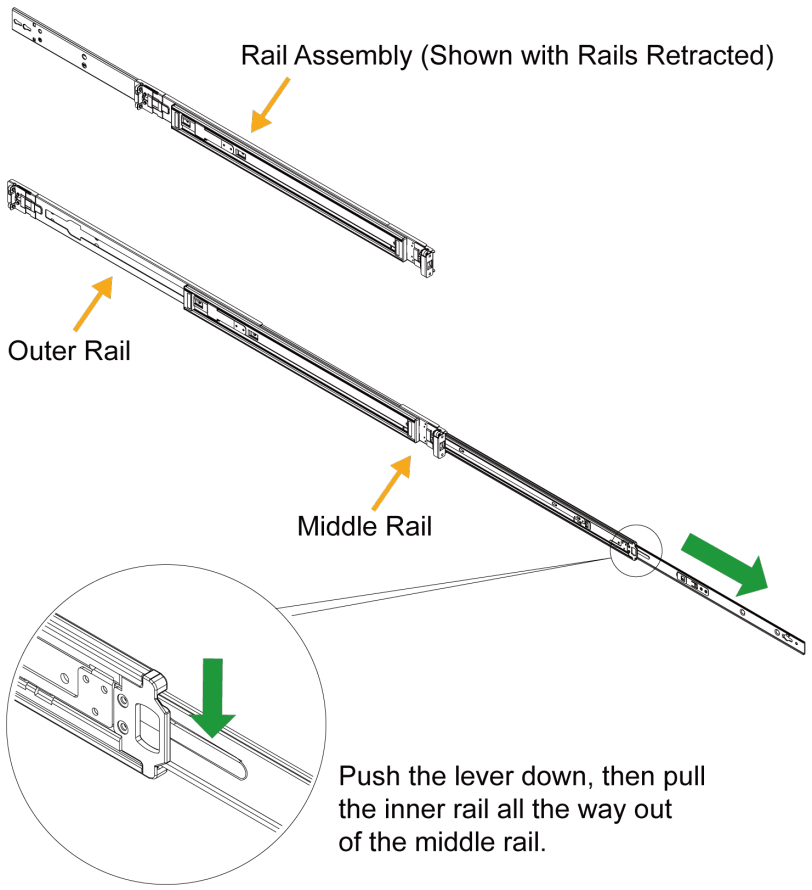


Figure 2-3. Extending and Releasing the Inner Rail

Installing the Outer Rails onto the Rack

Each end of the assembled outer rail includes a bracket with hooks and square, spring-loaded pegs to fit into the square holes in your rack.

Important: Stability hazard. The rack stabilizing mechanism must be in place, or the rack must be bolted to the floor before you slide the unit out for servicing. Failure to stabilize the rack can cause the rack to tip over.

Important: Do not pick up the server with the front handles. They are designed to pull the system from a rack only.

1. Confirm that the left and right outer rails have been correctly identified.
2. Press upward on the locking tab at the rear end of the middle rail.
3. Push the middle rail back into the outer rail.
4. Hang the hooks on the front of the outer rail onto the square holes on the front of the rack. If desired, use screws to secure the outer rails to the rack.
5. Pull out the rear of the outer rail, adjusting the length until it just fits within the posts of the rack.
6. Hang the hooks of the rear section of the outer rail onto the square holes on the rear of the rack. Take care that the proper holes are used so the rails are level. If desired, use screws to secure the rear of the outer rail to the rear of the rack.
7. Repeat for the other outer rail.

Important: This figure is for illustrative purposes only. Always install servers to the bottom of a rack first.

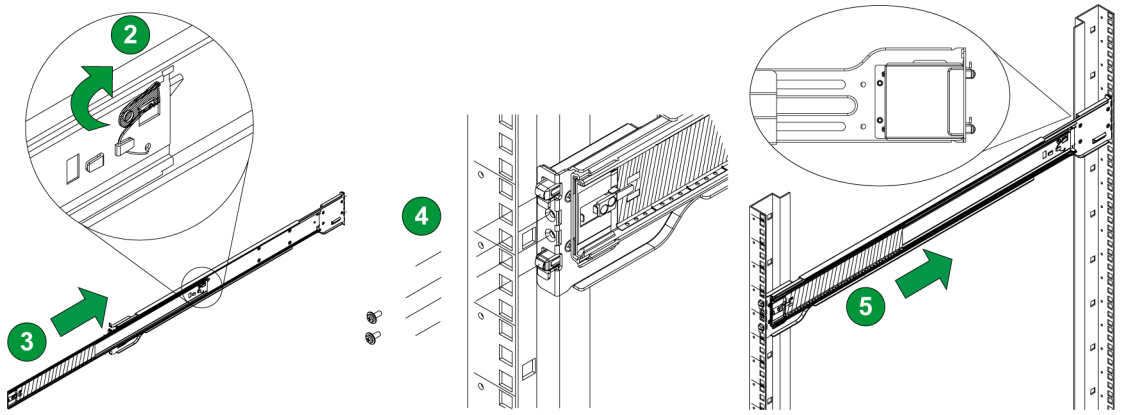


Figure 2-4. Extending and Mounting the Outer Rails

Installing the Inner Rails onto the Chassis

Important: Do not pick up the server with the front handles. They are designed to pull the system from a rack only.

Begin the rack mounting procedure by installing the inner rails to the CSE-MD101TS-R000NDP chassis.

1. Confirm that the left and right inner rails have been correctly identified.
2. Place the inner rail firmly against the side of the chassis, aligning the hooks on the side of the chassis with the holes in the inner rail.
3. Slide the inner rail forward toward the front of the chassis and under the hooks until the quick release bracket snaps into place, securing the rail to the chassis.
4. Optionally, you can further secure the inner rail to the chassis with a screw.
5. Repeat for the other inner rail.

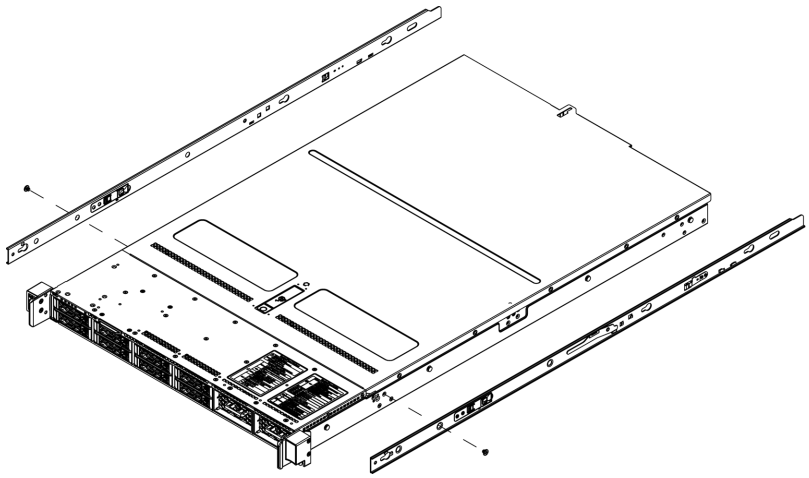


Figure 2-5. Installing the Inner Rails

2.4 Installing the Chassis into the Rack

Once rails are attached to the AS -1116CS-TN server and the rack, you can install the server.

Important: Use caution when mounting or removing the system from the rack. For large systems, at least one other person must assist during installation or removal. Follow the safety recommendations printed on the rails. Depending on the size of the system, you might need to use a lift.

1. Pull the middle rail out of the front of the outer rail, making sure that the ball bearing shuttle is locked at the front of the middle rail.
2. Align the rear of the chassis rails with the middle rails.
3. Push evenly on both sides of the chassis until it clicks into the fully extended position.
4. Depress the locking tabs on both sides of the chassis and push the it fully into the rack. The locking tabs should click.
5. Optional screws may be used to hold the front of the chassis to the rack.

Note: Keep the ball bearing shuttle locked at the front of the middle rail during installation.

Important: This figure is for illustrative purposes only. Always install servers to the bottom of a rack first.

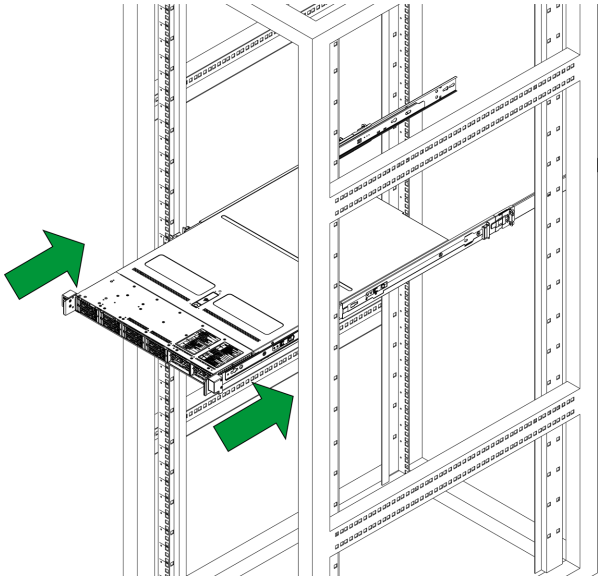


Figure 2-6. Sliding the AS -1116CS-TN into the Rack

Removing the Chassis from the Rack

Important: Use caution when mounting or removing the system from the rack. For large systems, at least one other person must assist during installation or removal. Follow the safety recommendations printed on the rails. Depending on the size of the system, you might need to use a lift.

1. If necessary, loosen the Phillips screws on the front of the chassis that hold it in the rack.
2. Pull the chassis forward out the front of the rack until it stops.
3. Press the release latches on each of the inner rails downward simultaneously and continue to pull the chassis forward and out of the rack.

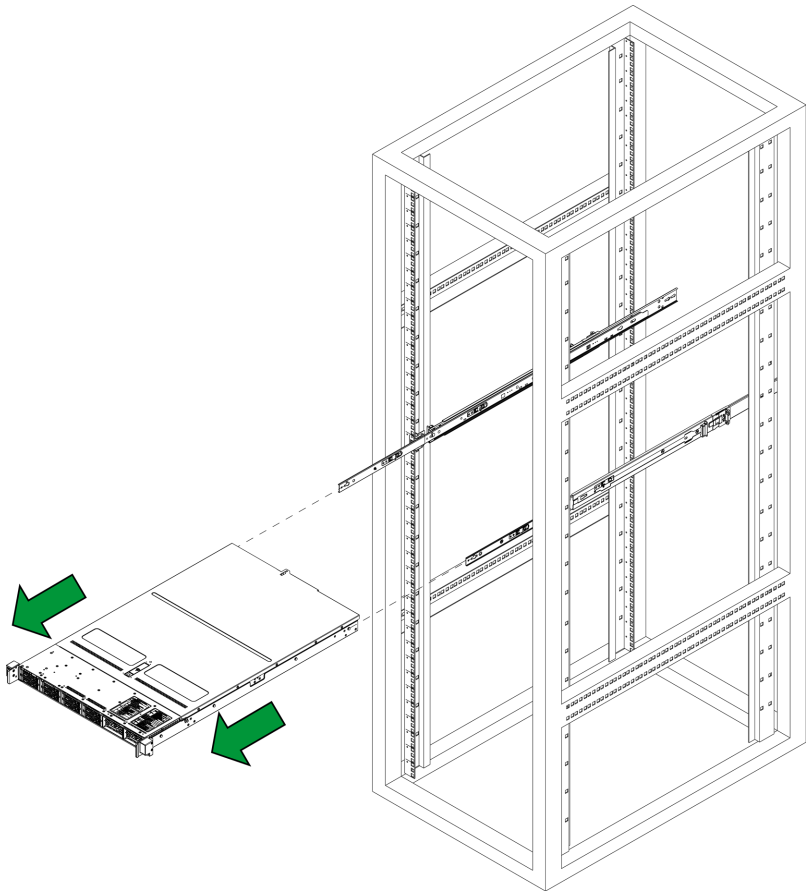


Figure 2-7. Removing the AS -1116CS-TN from the Rack

Removing the Outer Rails from the Rack

After removing the chassis and inner rails, you can remove the outer rails from the rack.

Releasing the Outer Rails

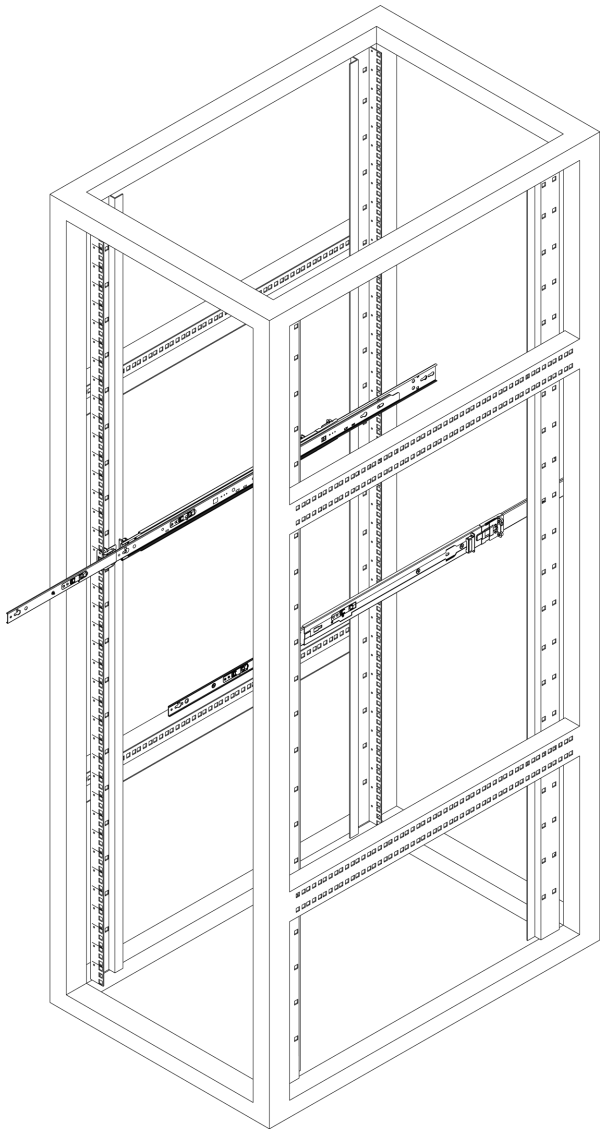


Figure 2-8. Releasing the Outer Rails

Chapter 3:

Maintenance and Component Installation

This chapter provides instructions on installing and replacing main system components for the AS -1116CS-TN server. To prevent compatibility issues, only use components that match the specifications and/or part numbers given.

Installation or replacement of most components require that power first be removed from the system. Follow the procedures given in each section.

3.1 Removing Power **42**
3.2 Accessing the System **43**
Removing the Chassis Cover 43
3.3 Static-Sensitive Devices **44**
Precautions 44
3.4 Processor and Heatsink Installation **45**
Preparing the Processor Socket 45
Installing the Processor into the Frame 47
Installing the Heatsink 50
Uninstalling the Heatsink and Processor 51
3.5 Memory Support and Installation **53**
Memory Support 53
General Guidelines for Optimizing Memory Performance 54
DIMM Population 54
DIMM Installation 56
DIMM Removal 58
3.6 Motherboard Battery Removal and Installation **59**
Battery Removal 59
Proper Battery Disposal 59
Battery Installation 59
3.7 Storage Drives **60**
Removing Hot-Swap Drive Carriers from the Chassis 60
Installing a Drive 60
Hot-Swap for NVMe Drives 62

3.8 System Cooling **63**
Fans 63
Air Shrouds 64
3.9 Expansion Cards **65**
AIOM Cards 65
3.10 Power Supply **66**
Replacing the Power Supply 66
3.11 Cable Routing Diagrams **67**
Configurations 67
12 NVMe 68
8 NVMe 69
12 SATA 70
8 SATA 71
12 SAS 72
8 SAS 73

3.1 Removing Power

Before performing some setup or maintenance tasks, use the following procedure to ensure that power has been removed from the AS -1116CS-TN server. This step is necessary when removing or installing non hot-swap components or when replacing a non-redundant power supply.

1. Use the operating system to power down the system.
2. After the system has completely shut-down, disconnect the AC power cord(s) from the power strip or outlet.
3. Disconnect the power cord(s) from the power supply module(s).

3.2 Accessing the System

The AS -1116CS-TN server features a removable top cover, which allows easy access to the inside of the server.

Removing the Chassis Cover

Important: Except for short periods of time, do not operate the server without the cover in place. The chassis cover must be in place to allow for proper airflow and to prevent overheating.

1. Press the release button and slide the cover toward the rear.
2. Lift the top cover up.
3. Check that all ventilation openings on the top cover and the top of the chassis are clear and unobstructed.

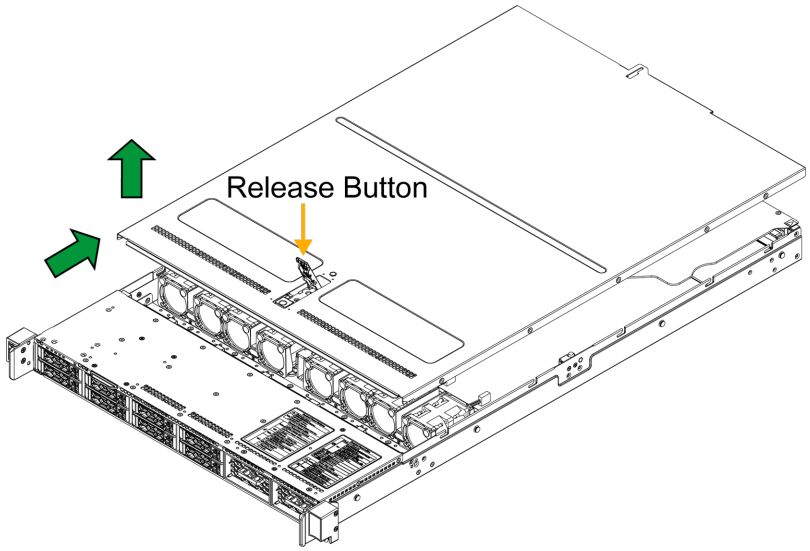


Figure 3-1. Removing the Chassis Cover

3.3 Static-Sensitive Devices

Electrostatic Discharge (ESD) can damage electronic components. To avoid damaging your motherboard, it is important to handle it very carefully. The following measures are generally sufficient to protect your equipment from ESD.

Precautions

- Use a grounded wrist strap designed to prevent static discharge.
- Touch a grounded metal object before removing the board from the antistatic bag.
- Handle the motherboard only by its edges. Do not touch its components, peripheral chips, memory modules, or gold contacts.
- When handling chips or modules, avoid touching their pins.
- Put the motherboard and peripherals back into their antistatic bags when not in use.
- For grounding purposes, make sure that your computer chassis provides excellent conductivity between the power supply, the case, the mounting fasteners, and the motherboard.
- Use only the correct type of onboard CMOS battery. To avoid possible explosion, do not install the onboard battery upside down.

3.4 Processor and Heatsink Installation

This section provides procedures to install the processor(s) and heatsink(s).

Notes:

- Take industry standard precautions to avoid ESD damage. For details, see "Static-Sensitive Devices" on the previous page.
- Before starting, make sure that the plastic socket cap is in place and none of the socket pins are bent. If any damage is noted, contact your retailer.
- Do not connect the system power cord before the processor and heatsink installation is complete.
- When handling the processor, avoid touching or placing direct pressure on the LGA lands (gold contacts). Improper installation or socket misalignment can cause serious damage to the processor or processor socket.
- When buying a processor separately, use only a Supermicro certified heatsink.
- Refer to the Supermicro website for the most recent processor support.
- When installing the heatsink, ensure a torque driver set to the correct force is used for each screw.
- Thermal grease is pre-applied on a new heatsink. No additional thermal grease is needed.

Preparing the Processor Socket

1. Remove the screw holding down the force frame. The spring-loaded force frame will raise up. Allow it to lift up to its stopped position.

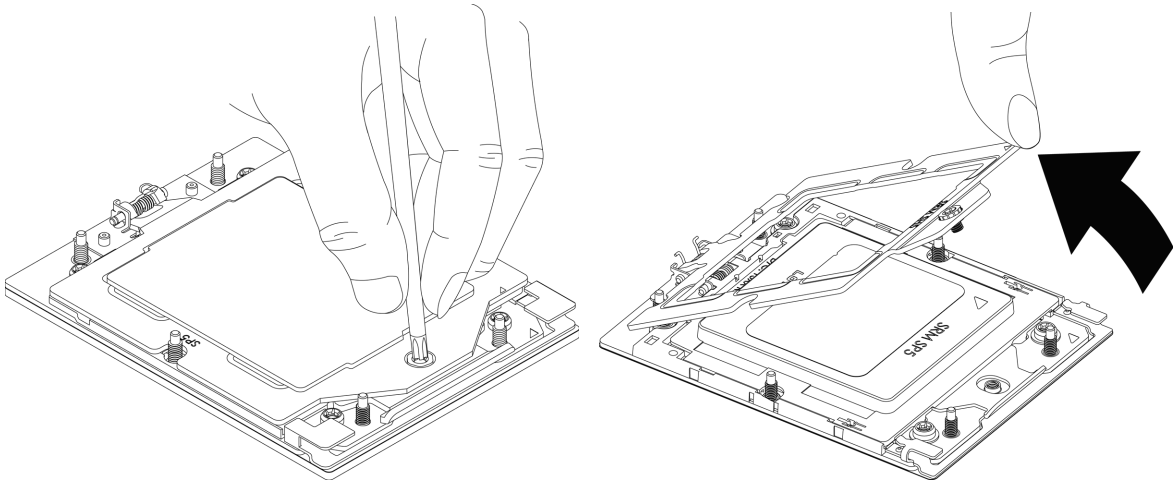


Figure 3-2. Removing Screw from the Force Frame

2. Lift the rail frame up by gripping the lift tabs near the front end of the rail frame. While keeping a secure grip of the rail frame, lift it to a position so you can do the next step of removing the external cap.

   Note: The rail frame is spring loaded, so keep a secure grip on it as you lift it so it does not snap up.

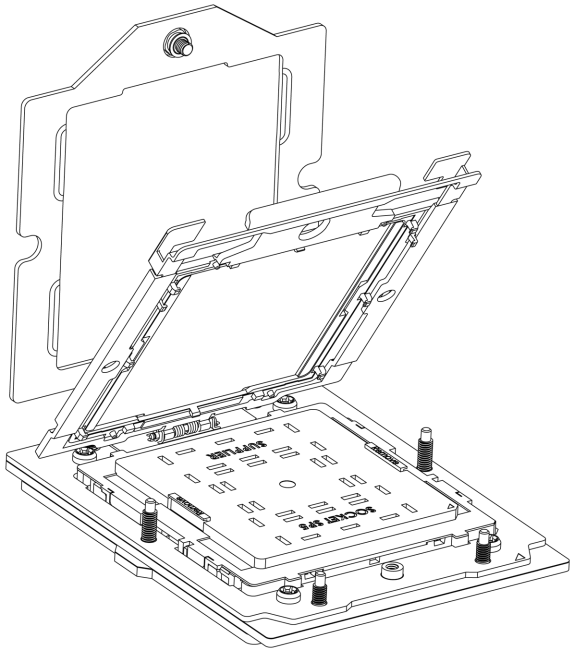


Figure 3-3. Lifting the Frame

3. Remove the external cap from the rail frame by pulling it upwards through the rail guides on the rail frame.

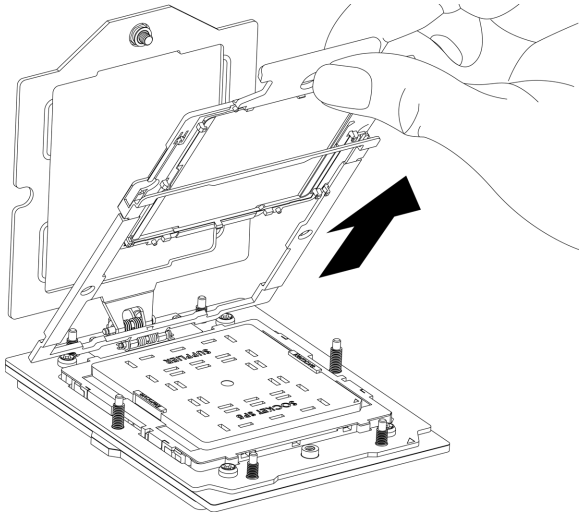


Figure 3-4. Removing the Cap

Installing the Processor into the Frame

1. The processor package is shipped from the factory with the carrier frame pre-assembled. Grip the handle of the carrier frame/processor assembly from its shipping tray, and while gripping the handle, align the flanges of the carrier frame onto the rails of the rail frame so its pins will be at the bottom when the rail frame is lowered later.
2. Slide the carrier frame/processor assembly downwards to the bottom of the rail frame. Ensure the flanges are secure on the rails as you lower it downwards.

   Note: You can only install the processor inside the socket in one direction with the handle at the top. Make sure that it is properly inserted into the socket before closing the rail frame plate. If it doesn't close properly, do not force it as it may damage your processor. Instead, open the rail frame plate again, and double-check that the processor is aligned properly.

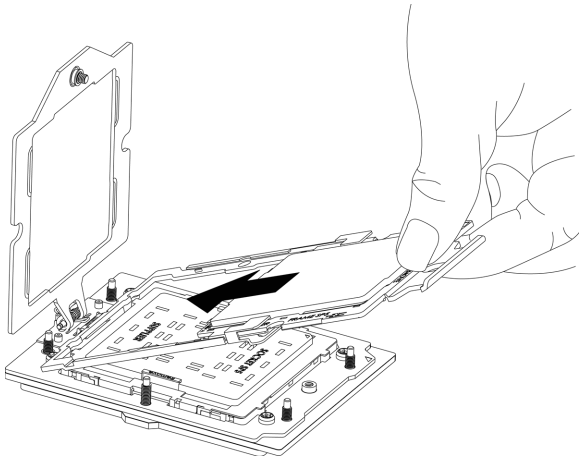


Figure 3-5. Installing into the Rail Frame

3. Lift up the rail frame until it securely rests in an upright position. Then remove the cover cap from the socket below. Grip the two lift tabs marked "Remove" at the middle of the cap and pull vertically upwards to remove the cover cap.

Important: The exposed socket contacts are extremely vulnerable and can be damaged easily. Do not touch or drop objects onto the contacts and be careful removing the cover cap and when placing the rail frame over the socket.

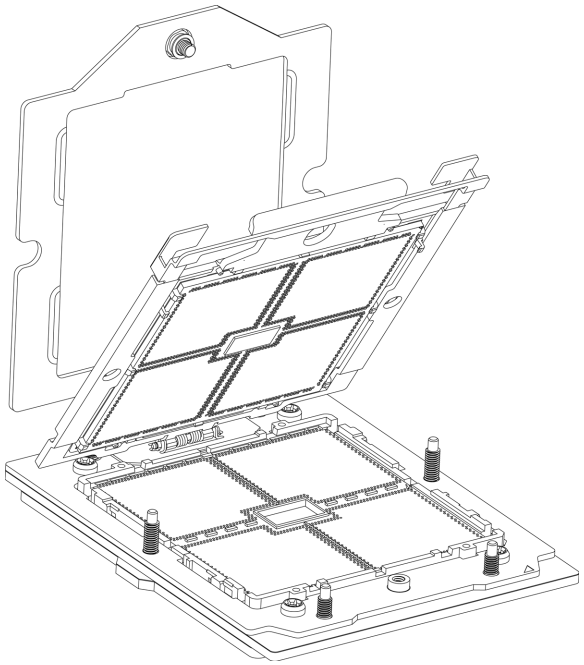


Figure 3-6. Removing the Cover Cap

4. Gently lower the rail frame down onto the socket until the latches on the rail frame engage with the socket housing and it rests in place. Do not force it into place! Note that the force frame is spring loaded and must be held in place before it is secured.

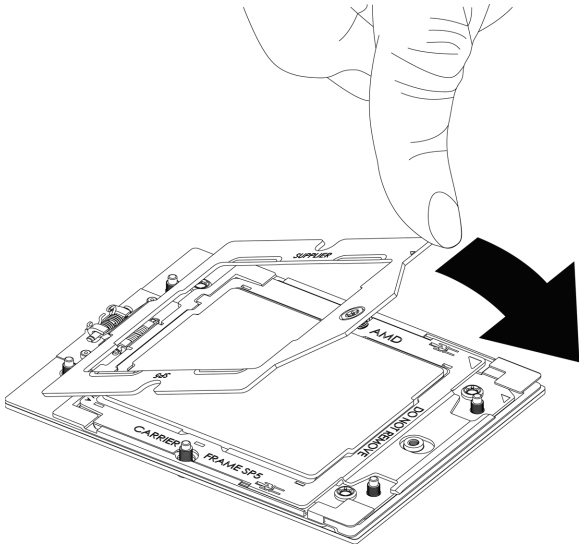


Figure 3-7. Securing the Force Frame

5. Use a T20 bit torque driver, set at 12.5–15.0 kgf-cm (10.8–13.0 lbf-in) to prevent damage to the processor. Replace and tighten the screws in the same order they were removed. When finished, the force frame will be secure over both the rail frame and processor package.

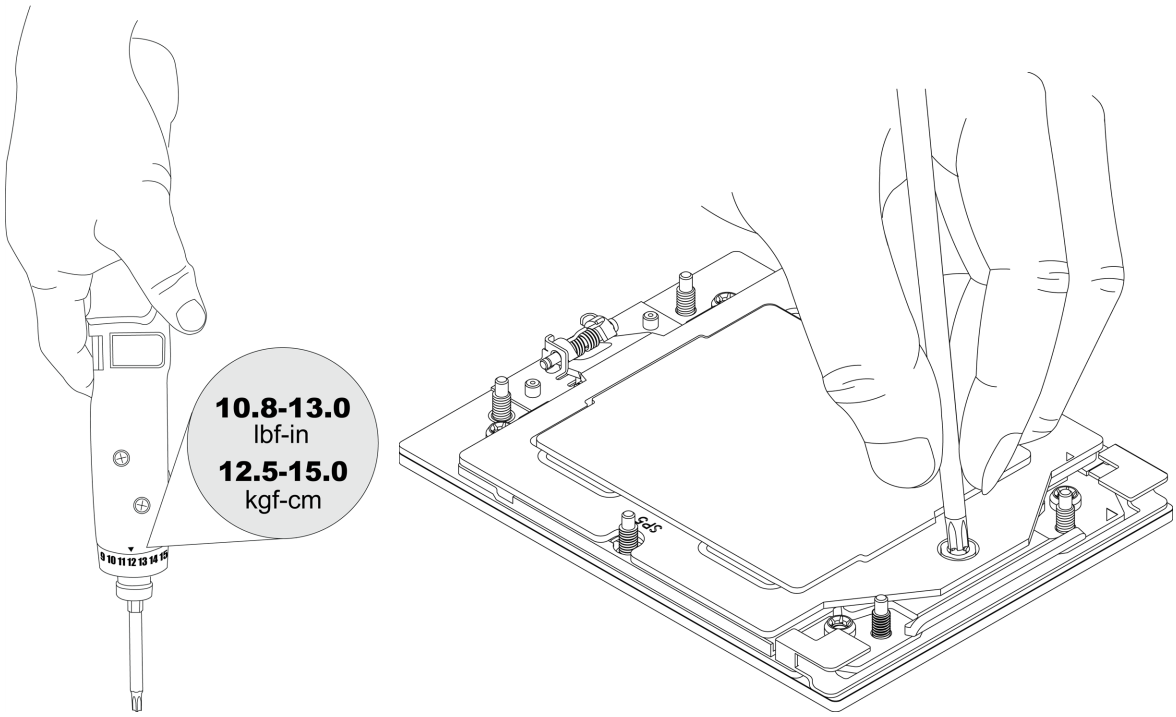


Figure 3-8. Replacing Screws with Torque Driver

Installing the Heatsink

After the force frame is secured and the processor is in place, install the heatsink onto the processor.

1. Place the heatsink so that it rests on the processor aligning the six screws on the socket frame.

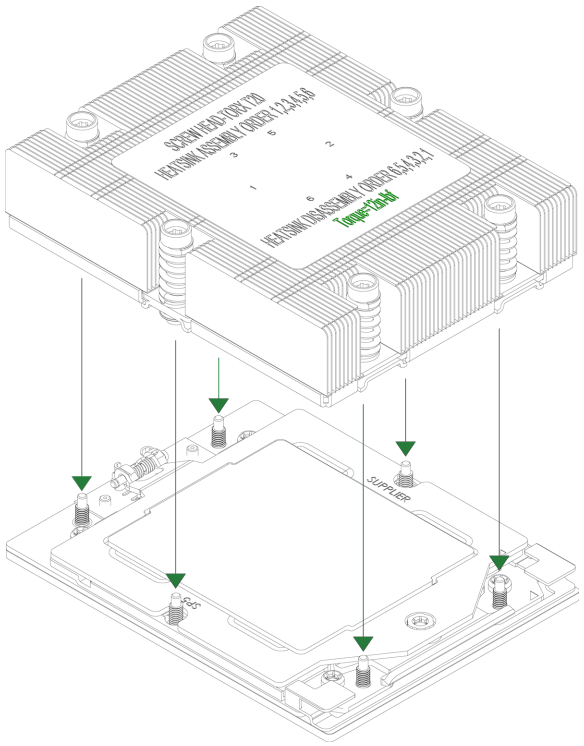


Figure 3-9. Placing the Heatsink

2. Using a T20 torque driver, tighten the screws using the diagonal tightening pattern and torque specifications printed on the heatsink. Tighten the two center screws completely before tightening the four corner screws.

The heatsink is now secured.

Uninstalling the Heatsink and Processor

1. Remove the screws holding the heatsink and gently work it loose.
2. Clean the thermal grease left by the heatsink on the processor assembly to limit the risk of contaminating the land pads or contacts in the socket housing.
3. Unscrew the plate and lift the force frame to the vertical position.
4. Lift the rail frame using the lift tabs near the front end of the rail frame. Note that the rail frame is spring loaded, so be careful lifting it up into a vertical position.
5. Grip the handle of the carrier frame and pull upwards to extract it from the rail frame. Return the processor assembly to its original shipping container.
6. Grip the handle on the external cap and return it to the rail frame, sliding it downwards until it rests in the frame.

7. Gripping the rail frame, rotate it downwards until it rests above and locks over the socket housing in its horizontal position.
8. Push and rotate down the force frame until it is over the external cap and rail frame in a horizontal position.
9. While holding down the force frame, secure it back to the socket frame by securing screw #1 in place.

3.5 Memory Support and Installation

Important: To prevent any damage, exercise extreme care when installing or removing memory modules.

Note: Check the Supermicro website for recommended memory modules.

Memory Support

The AS -1116CS-TN supports up to 3 TB of ECC DDR5 6400 MT/s speed (9005 series CPUs) or 4800 MT/s speed (9004 series CPUs), RDIMM/3DS memory in 12 DIMM slots. Refer to the tables below for additional memory information.

Populating RDIMM/RDIMM 3DS DDR5 Memory Modules with AMD EPYC™ 9005 Series Processors				
Type	DIMM Population	Maximum Frequency (MT/s)		
	DIMM1	6400 MT/s Grade DIMM	5600 MT/s Grade DIMM	4800 MT/s Grade DIMM
RDIMM	1R (1 rank)	6400	5600	4800
	2R (2 ranks)			
3DS RDIMM	2S2R (4 ranks)			
	2S4R (8 ranks)			

Populating RDIMM/RDIMM 3DS DDR5 Memory Modules with AMD EPYC™ 9004 Series Processors			
Type	DIMM Population	Maximum Frequency (MT/s)	
	DIMM1	5600 MT/s Grade DIMM	4800 MT/s Grade DIMM
RDIMM	1R (1 rank)	4800	4800
	2R (2 ranks)		
3DS RDIMM	2S2R (4 ranks)		
	2S4R (8 ranks)		

General Guidelines for Optimizing Memory Performance

- It is recommended to use DDR5 memory of the same type, size, and speed.
- Mixed DIMM speeds can be installed. However, all DIMMs will run at the speed of the slowest DIMM.
- The motherboard will support an odd number amount of memory modules. However, to achieve the best memory performance, a balanced memory population is recommended.
- Memory speed performance may vary depending on the memory DIMM model. Please use Supermicro-validated memory. Contact a Supermicro representative for more details.

DIMM Population

This table shows the recommended slots to populate.

DIMM Population Guide													
Slots Used	Channel												Nodes per Socket (NPS) Supported
	F1	E1	D1	C1	B1	A1	G1	H1	I1	J1	K1	L1	
1 DIMM						V							NPS1
2 DIMMs						V	V						NPS2, NPS1
4 DIMMs				V		V	V		V				NPS4, NPS2, NPS1
6 DIMMs				V	V	V	V	V	V				NPS2, NPS1
8 DIMMs		V		V	V	V	V	V	V		V		NPS4, NPS2, NPS1
10 DIMMs		V	V	V	V	V	V	V	V	V	V		NPS2, NPS1
12 DIMMs	V	V	V	V	V	V	V	V	V	V	V	V	NPS4, NPS2, NPS1

Note: Fully populate the motherboard with validated memory modules to achieve the best memory performance. The supported Nodes per Socket (NPS) setting is based on user applications. Selecting “Auto” in the BIOS will default to NPS1.

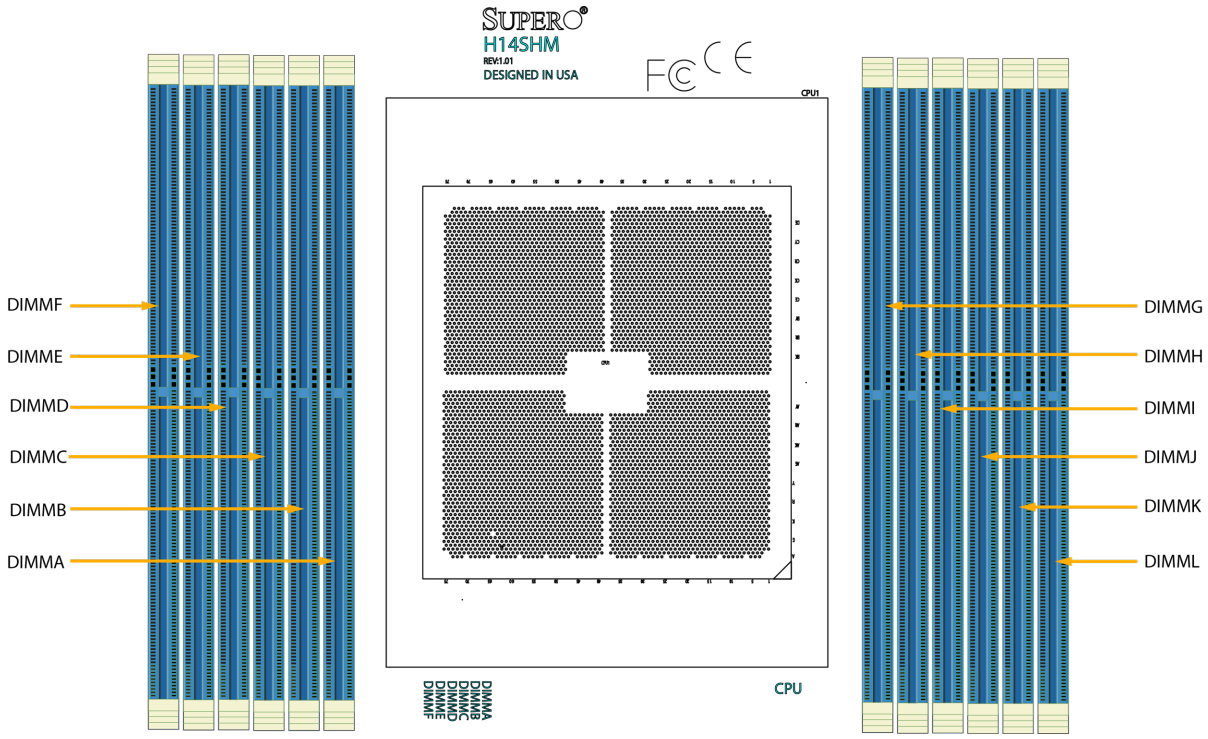


Figure 3-10. DIMM Labels

DIMM Installation

Important: To avoid causing any damage to the memory module or the DIMM socket, do not use excessive force when pressing the release tabs on the ends of the DIMM socket. Handle memory modules with care. To avoid ESD-related damage to your memory modules or components, carefully follow all the instructions given in "Static-Sensitive Devices" on page 44.

1. Insert the desired number of DIMMs into the memory slots based on the recommended DIMM population table earlier in this section.
2. Push the release tabs outwards on both ends of the DIMM slot to unlock it.

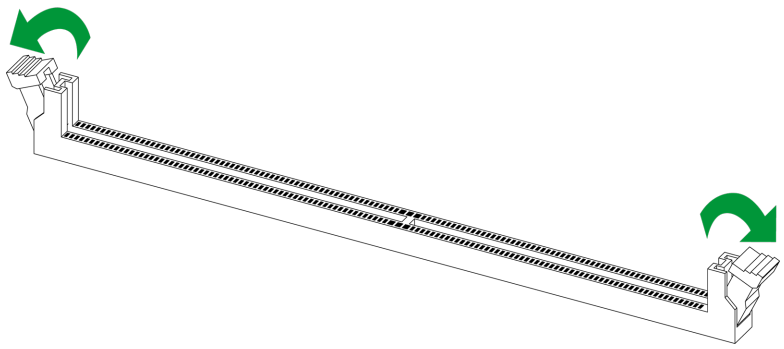


Figure 3-11. Unlocking the DIMM Slot

3. Align the key of the DIMM with the receptive point on the memory slot.

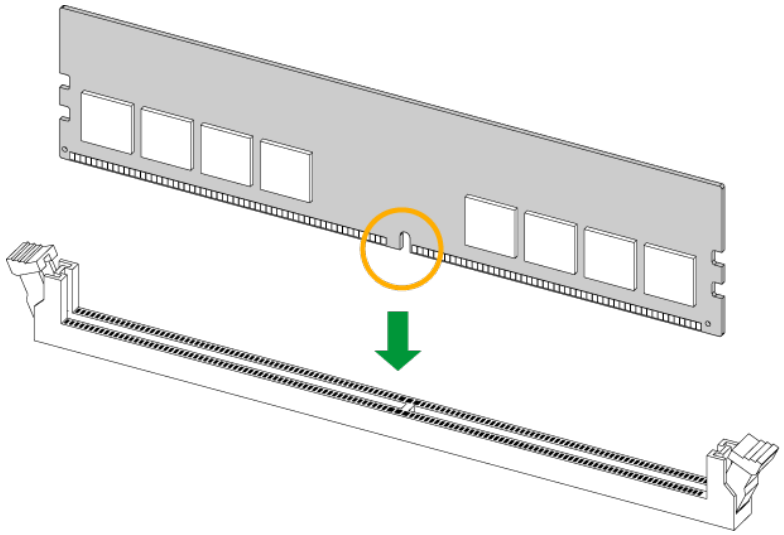


Figure 3-12. Aligning the DIMM Slot with the Receptive Point

4. Align the notches on both ends of the module against the receptive points on the ends of the slot.

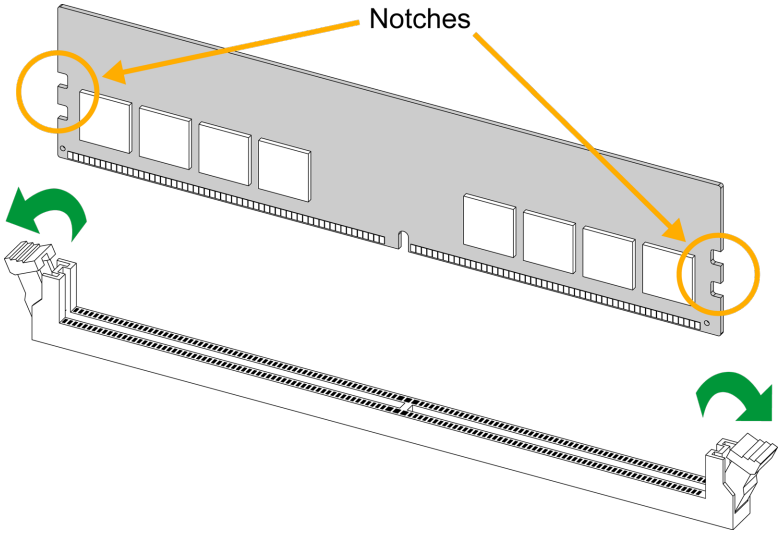


Figure 3-13. Aligning the Notches

5. Press both ends of the module straight down into the slot until the module snaps into place.
6. Press the release tabs to the lock positions to secure the DIMM into the slot.

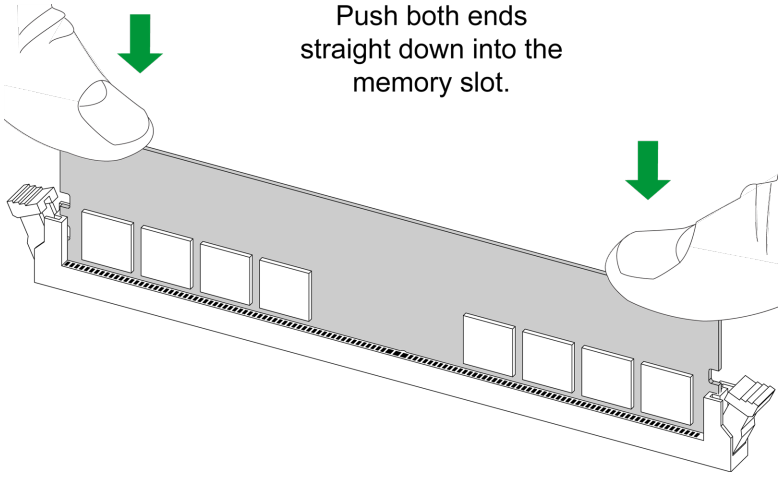


Figure 3-14. Securing the DIMM

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

DIMM Removal

Important: To avoid causing any damage to the memory module or the DIMM socket, do not use excessive force when pressing the release tabs on the ends of the DIMM socket. Handle memory modules with care. To avoid ESD-related damage to your memory modules or components, carefully follow all the instructions given in "Static-Sensitive Devices" on page 44.

Press both release tabs on the ends of the DIMM socket to unlock it. Once the DIMM is loosened, remove it from the memory slot.

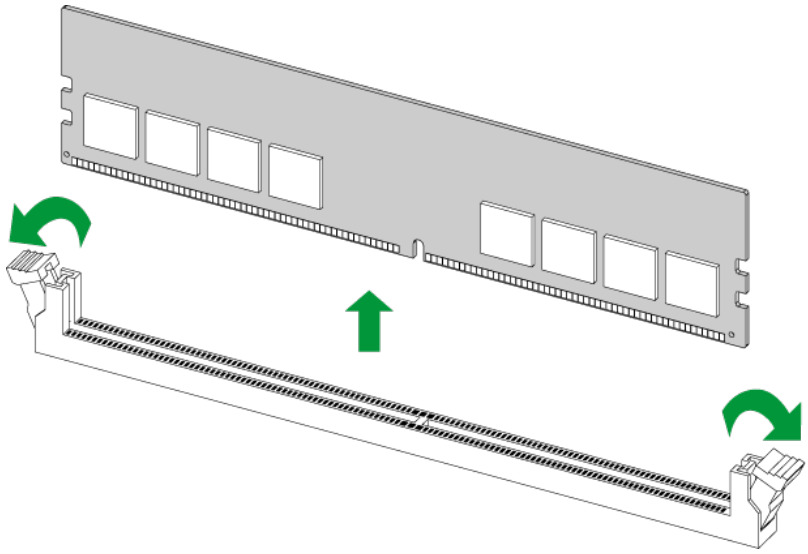


Figure 3-15. Unlocking the DIMM Slot

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

3.6 Motherboard Battery Removal and Installation

Battery Removal

To remove the onboard battery, follow the steps below:

1. Power off your system and unplug your power cable.
2. Place the system on a workbench.
3. Remove the top cover from the system.
4. Locate the onboard battery as shown below.
5. Using a tool such as a pen or a small screwdriver, push the battery lock outwards to unlock it. Once unlocked, the battery will pop out from the holder.
6. Remove the battery.

Proper Battery Disposal

Important: Handle used batteries carefully. Do not damage the battery in any way; a damaged battery may release hazardous materials into the environment. Do not discard a used battery in the garbage or a public landfill. Comply with the regulations set up by your local hazardous waste management agency to dispose of your used battery properly.

Battery Installation

To install an onboard battery, follow steps 1 and 2 above and continue below:

Important: When replacing a battery, be sure to only replace it with the same type.

1. Identify the battery's polarity. The positive (+) side should be facing up.
2. Insert the battery into the battery holder and push it down until you hear a click to ensure that the battery is securely locked.

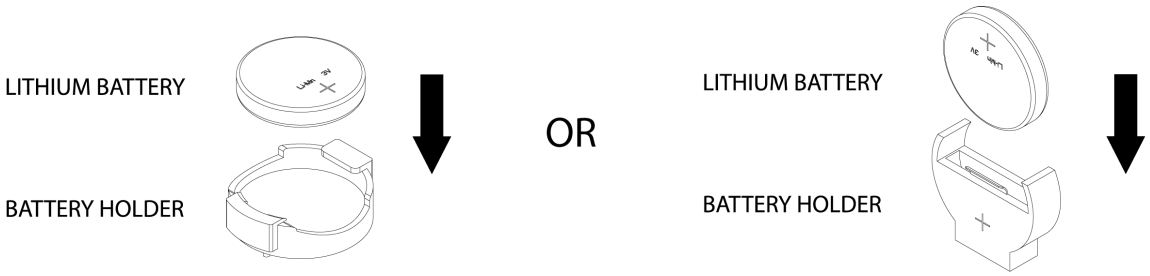


Figure 3-16. Installing a Battery

3.7 Storage Drives

The storage drives are mounted in tool-less drive carriers that simplify their removal from the AS -1116CS-TN server. These carriers also help promote proper airflow.

Note: Enterprise-level storage modules are recommended for use in Supermicro servers.

Removing Hot-Swap Drive Carriers from the Chassis

Important: Except for short periods of time (swapping drives), do not operate the server with the drive carriers removed from the bays, regardless of how many drives are installed, for proper airflow.

1. Press the release button on the drive carrier, which will extend the drive carrier handle.
2. Use the drive carrier handle to pull the drive out of the chassis.

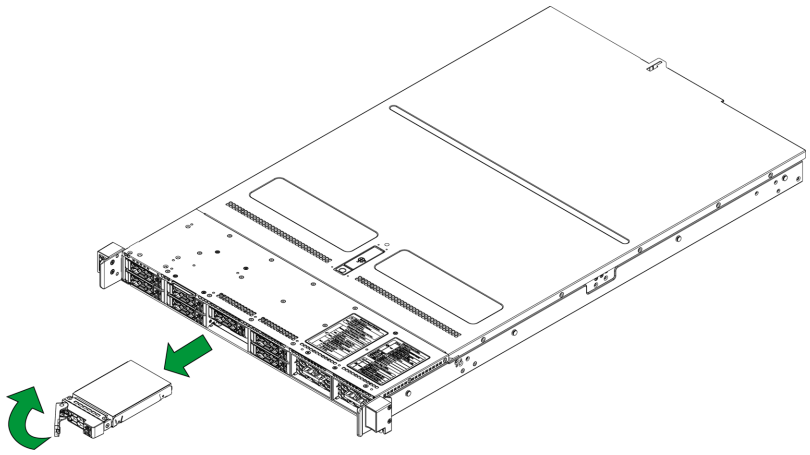


Figure 3-17. Removing a Drive Carrier

Installing a Drive

1. Insert a drive into the carrier with the PCB side facing down and the connector end toward the rear of the carrier. Place the drive in the carrier so that the screw holes line up.
2. The drive carrier has a tool-less design but you also have the option to secure the drive to the carrier with two M3 screws. These screws are included in the chassis accessory box.

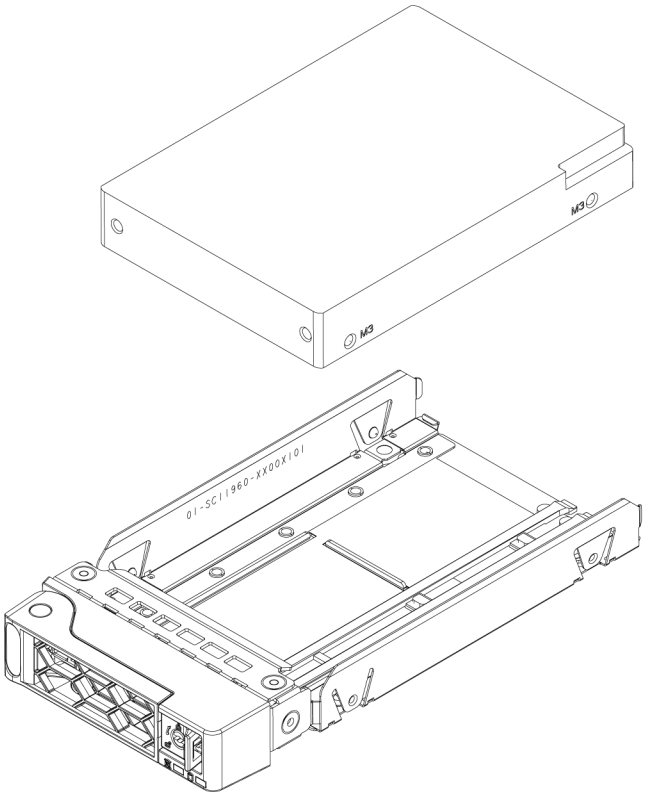


Figure 3-18. Mounting a Drive in the Carrier

3. Insert the drive carrier with the drive into its bay, keeping the carrier oriented so that the drive is on the top of the carrier and the release button is on the right side. When the carrier reaches the rear of the bay, the release handle will retract.
4. Push the handle in until it clicks into its locked position.

Hot-Swap for NVMe Drives

Supermicro servers support NVMe surprise hot-swap. For even better data security, NVMe orderly hot-swap is recommended. NVMe drives can be ejected and replaced remotely using BMC.

Ejecting a Drive

1. **BMC > System > Storage Monitoring > Physical View**
2. Select Device, Group, and Slot, and click **Eject**. After ejecting, the drive Status LED indicator turns green.
3. Remove the drive.

Note that Device and Group are categorized by the CPLD design architecture.

A Slot is the slot number on which the NVMe drives are mounted.

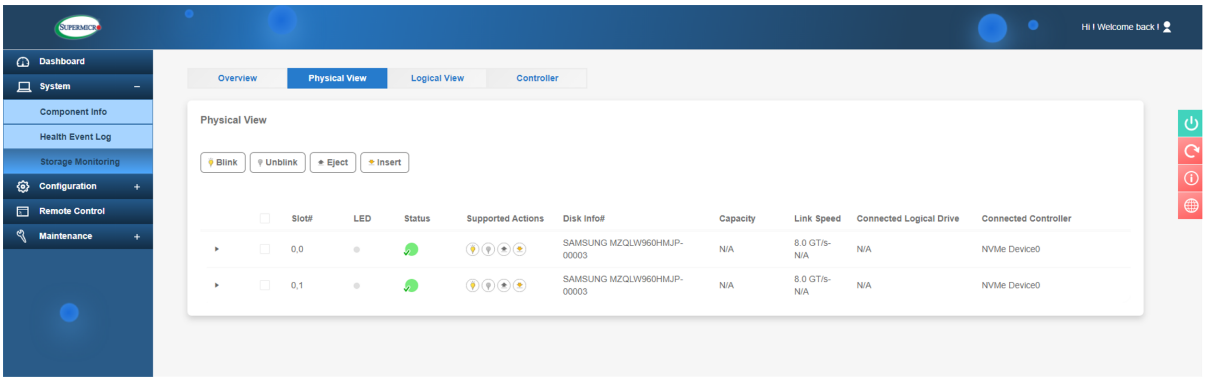


Figure 3-19. BMC Screenshot

Replacing a Drive

1. Insert the replacement drive.
2. **BMC > System > Storage Monitor > Physical View**
3. Select Device, Group, and slot and click **Insert**. The drive Status LED indicator flashes red, then turns off. The Activity LED turns blue.

3.8 System Cooling

Refer to the following sections for information about the cooling capabilities of the AS -1116CS-TN server.

Fans

Eight 4-cm heavy-duty fans provide cooling for the system. Fan speed is controlled by a system temperature setting in the BMC. If a fan fails, the remaining fans will ramp up to full speed. The system can continue to run with a failed fan. Replace any failed fan at your earliest convenience with the same type and model. Failed fans can be identified through the BMC.

Changing a System Fan

1. Determine which fan has failed using the BMC, or if necessary, open the chassis while the system is running. Never run the server for long without the chassis cover.
2. Power down the entire server. If that is difficult, at least power down the system associated with the failed fan.
3. Remove the failed fan's power cable from the backplane.

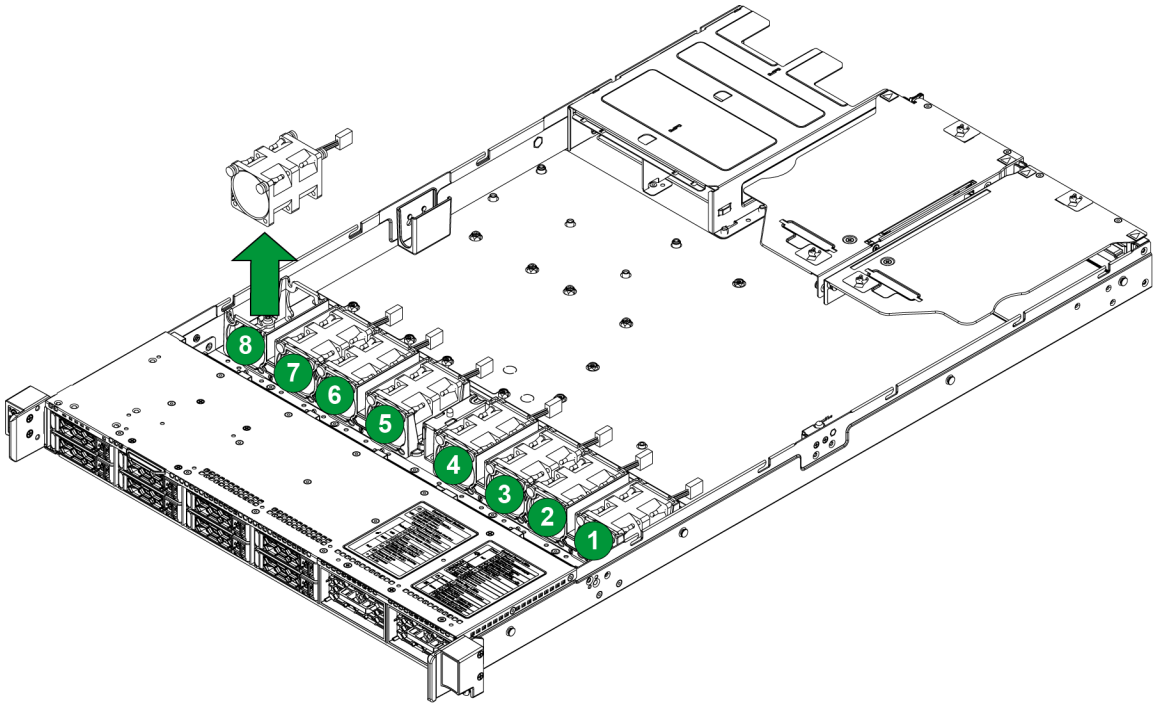


Figure 3-20. Changing a System Fan

Air Shrouds

Air shrouds concentrate airflow to maximize fan efficiency. The AS -1116CS-TN server includes one air shroud for each processor. Even when the system is in standby mode, the air shroud helps direct airflow to cool AIOM and other add-on cards.

Installing an Air Shroud

1. Screw the guide pins into the sled as shown below.
2. Position the air shrouds and drop them onto the guide pins and into place.

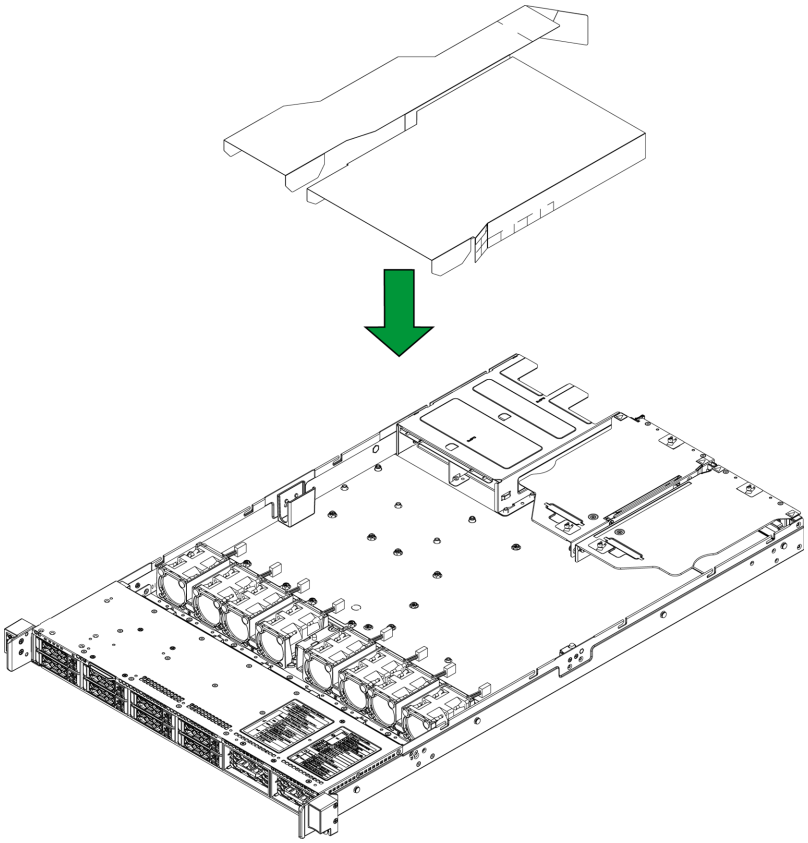


Figure 3-21. Installing an Air Shroud

3.9 Expansion Cards

Refer to the following sections for information on the expansion cards supported by the AS -1116CS-TN server.

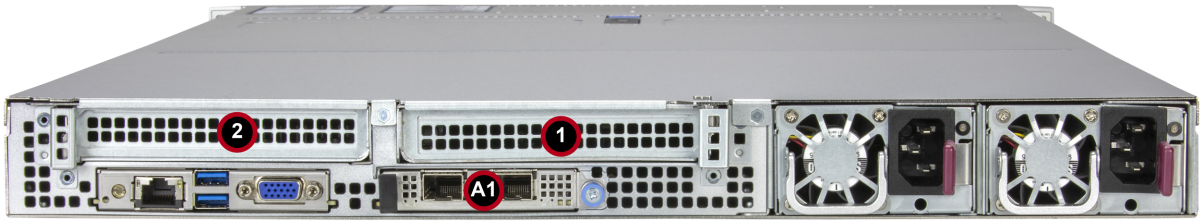


Figure 3-22. Expansion Card Locations

AIOM Cards

The AS -1116CS-TN server offers an option for AIOM cards.

AIOM Card Slot	
Slot	**Description**
A1	PCIe 5.0 x16 AIOM slot (OCP3.0 compatible)

3.10 Power Supply

The chassis features redundant power supplies. The system will continue to operate if one module fails, but it should be replaced as soon as convenient. The power supply modules are hot-swappable, meaning they can be changed without powering down the system. New units can be ordered directly from Supermicro or authorized distributors.

The power supplies will automatically sense and operate at an input voltage between 100–127 VAC or 200–240 VAC, at 50–60 Hz.

Power Supply Indicators		
Power Supply Condition	**Green LED**	**Amber LED**
No AC power to power supply	Off	Off
Power supply critical events causing a shutdown/failure/OCP/OVP/Fan Fail/OTP/UVP	Off	On
Power supply warning events where the power supply continues to operate; high temperature; over voltage; under voltage, etc.	Off	1 Hz Blinking
AC present only 12 V ON (PS OFF)	On	Off
Output ON and OK	On	Off
One of the power cords is unplugged and in redundant mode.	Off	On

Replacing the Power Supply

1. Determine which of the two modules has failed and unplug its AC power cord.
2. On the back of the module, push the release tab sideways.
3. Pull the module out using the handle.
4. Push a new module into the power bay until it clicks. Replace with the same model.
5. Plug the AC power cord back into the module.

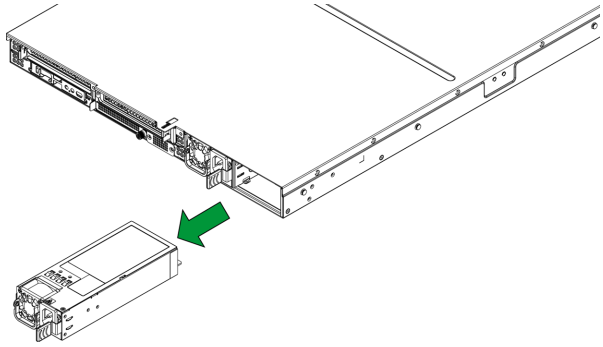


Figure 3-23. Replacing the Power Supply

3.11 Cable Routing Diagrams


The diagrams in this section indicate the cable routing for the storage, PCIe, I/O, and power cables. When disconnecting cables to add or replace components, refer to the diagrams so you can reroute them in the same manner. If cables are not connected or routed properly it may lead to device detection or performance issues.

The AS -1116CS-TN server supports the following drive configurations. All riser cards are included by default.

- Configuration 1: 8 NVMe
- Configuration 2: 12 NVMe
- Configuration 3: 8 SATA
- Configuration 4: 12 SATA
- Configuration 5: 8 SAS
- Configuration 6: 12 SAS

Configurations


Configuration #	Front	Rear
#1 (12 NVMe) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		**1 AIOM slot Default** (AIOM card optional but required to install in slot) + **2 PCIe 5.0 x16 Default (Slot 1, 2)** **1 DC-SCM (Slot 3)**
#2 (8 NVMe) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		
#3 (12 SATA) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		
#4 (8 SATA) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		
#5 (12 SAS) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		
#6 (8 SAS) **+ 2 PCIe x16** **+ 1 AIOM** **+ 1 DC-SCM**		



MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I²C


12 NVMe

This configuration of the AS -1116CS-TN server supports:

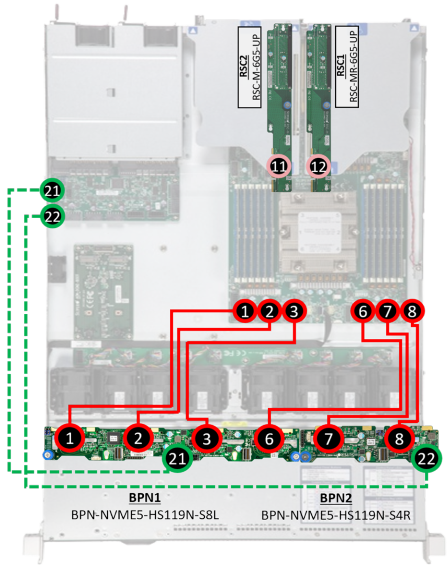

Front Storage Cables

	Cable	Description	MB/PDB Port	Backplane Port
1	CBL-MCIO-1245M5RE	NVMe 0-1	NVMe0/1	**BPN1** CN1
2	CBL-MCIO-1330M5	NVMe 2-3	NVMe2/3	**BPN1** CN2
3	CBL-MCIO-1330M5	NVMe 4-5	NVMe4/5	**BPN1** CN3
6	CBL-MCIO-1339M5R	NVMe 6-7	NVMe10/11	**BPN1** CN4
7	CBL-MCIO-1340M5-1	NVMe 8-9	NVMe12/13	**BPN2** CN1
8	CBL-MCIO-1226M5	NVMe 10-11	NVMe14/15	**BPN2** CN2
21	CBL-PWEX-1142-60	**BPN1** Power	**PDB** JPW8	**BPN1** JPW1
22	CBL-PWEX-1136-70	**BPN2** Power	**PDB** JPW9	**BPN2** JPW1

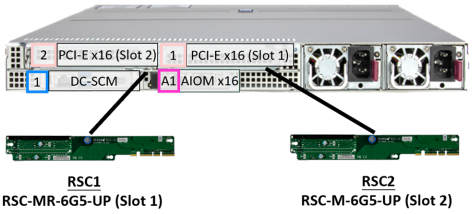


Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	**RSC2** Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	**RSC1** Gold Finger

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I²C


8 NVMe

This configuration of the AS -1116CS-TN server supports:

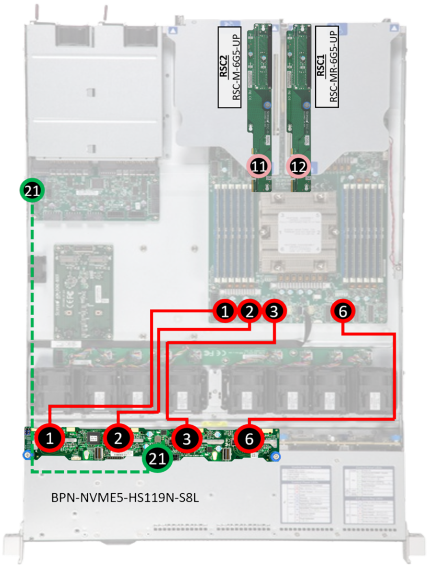

Front Storage Cables

	Cable	Description	MB/PDB Port	Backplane Port
1	CBL-MCIO-1245M5RE	NVMe 0-1	NVMe0/1	CN1
2	CBL-MCIO-1330M5	NVMe 2-3	NVMe2/3	CN2
3	CBL-MCIO-1330M5	NVMe 4-5	NVMe4/5	CN3
6	CBL-MCIO-1339M5R	NVMe 6-7	NVMe10/11	CN4
21	CBL-PWEX-1142-60	Power	PDB JPW8	JPW1

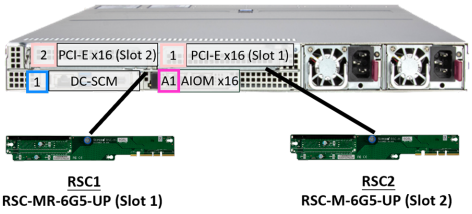

RSC1
RSC-MR-6G5-UP (Slot 1)

RSC2
RSC-M-6G5-UP (Slot 2)


Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	RSC2 Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	RSC1 Gold Finger

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I²C


12 SATA

This configuration of the AS -1116CS-TN server supports:

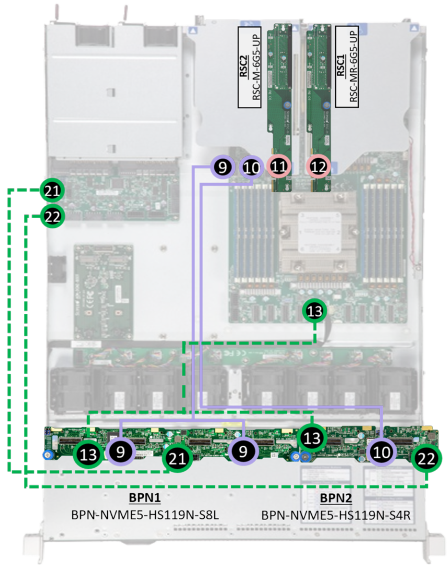

Front Storage Cables

	Cable	Description	MB/PDB Port	Backplane Port
9	CBL-MCIO-1255L4Y	SATA 0-7	NVMe16/17	**BPN1** JSM1 & JSM2
10	CBL-MCIO-1255L4Y	SATA 8-11	NVMe18/19	**BPN2** JSM1
13	CBL-CDAT-1062Y-45	I^2C	JBPNI2C1	**BPN1** J25 **BPN2** J25
21	CBL-PWEX-1142-60	**BPN1** Power	**PDB** JPW8	**BPN1** JPW1
22	CBL-PWEX-1136-70	**BPN2** Power	**PDB** JPW9	**BPN2** JPW1

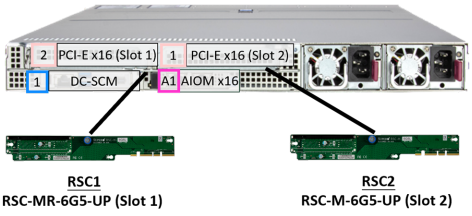


Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	**RSC2** Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	**RSC1** Gold Finger

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I^2C


8 SATA

This configuration of the AS -1116CS-TN server supports:

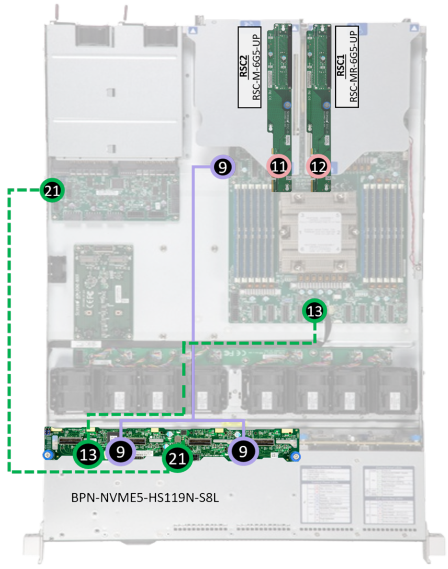

Front Storage Cables

	Cable	Description	MB/PDB Port	Backplane Port
9	CBL-MCIO-1255L4Y	SATA 0-7	NVMe16/17	JSM1 & JSM2
13	CBL-CDAT-1062Y-45	I^2C	JBPNI2C1	J25
21	CBL-PWEX-1142-60	Power	PDB JPW8	JPW1

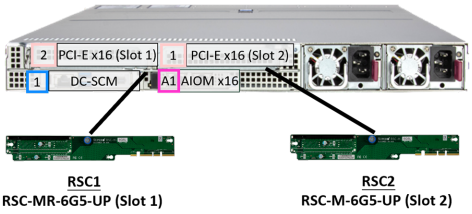

Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	RSC2 Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	RSC1 Gold Finger


RSC1
RSC-MR-6G5-UP (Slot 1)


RSC2
RSC-M-6G5-UP (Slot 2)

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I^2C

12 SAS

This configuration of the AS -1116CS-TN server supports:

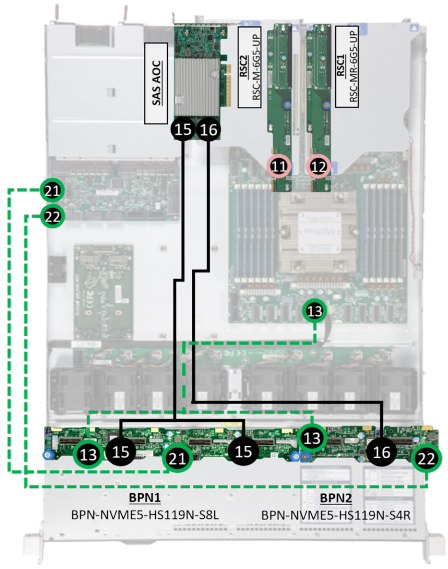

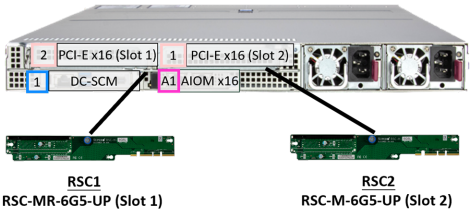

RSC1
RSC-MR-6G5-UP (Slot 1)

RSC2
RSC-M-6G5-UP (Slot 2)

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I²C

Front Storage Cables


	Cable	Description	AOC/PDB Port	Backplane Port
15	CBL-SAST1273LP-100	SAS 0-7	To AOC CN1	**BPN1** JSM1 & JSM2
16	CBL-SAST1273LP-100	SAS 8-11	To AOC CN2	**BPN2** JSM1
13	CBL-CDAT-1062Y-45	I²C	JBPNI2C1	**BPN1** J25 **BPN2** J25
21	CBL-PWEX-1142-60	**BPN1** Power	**PDB** JPW8	**BPN1** JPW1
22	CBL-PWEX-1136-70	**BPN2** Power	**PDB** JPW9	**BPN2** JPW1

Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	**RSC2** Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	**RSC1** Gold Finger


8 SAS

This configuration of the AS -1116CS-TN server supports:

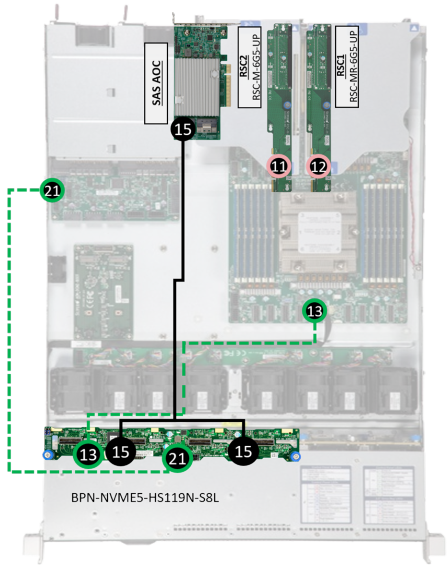

Front Storage Cables

	Cable	Description	AOC/PDB Port	Backplane Port
15	CBL-SAST1273LP-100	SAS 0-7	To AOC CN1	JSM1 & JSM2
13	CBL-CDAT-1062Y-45	I^2C	JBPNI2C1	J25
21	CBL-PWEX-1142-60	Power	PDB JPW8	JPW1

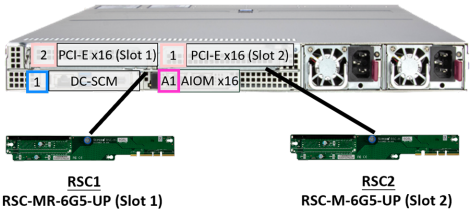

Rear PCIe Slot Cables

	Cable	Description	MB Port	Riser Port
11	N/A	PCIe 5.0 x16 (Slot 1)	P1MXIO1	RSC2 Gold Finger
12	N/A	PCIe 5.0 x16 (Slot 2)	P1MXIO2	RSC1 Gold Finger

RSC1
RSC-MR-6G5-UP (Slot 1)

RSC2
RSC-M-6G5-UP (Slot 2)

MCIO port from CPU
DC-SCM port from CPU
Riser slot from CPU
AIOM slot from CPU
MCIO port for SATA from CPU
To SAS AOC
Power/ I^2C

Chapter 4:

Motherboard Connections, Jumpers, and LEDs

This section describes the connections on the motherboard and provides pinout definitions. Note that depending on how the system is configured, not all connections are required. The LEDs on the motherboard are also described here. A motherboard layout indicating component locations may be found in the "Introduction" on page 12. More detail can be found in the H14SHM motherboard manual.

Review the "Standardized Warning Statements for AC Systems" on page 152 before installing or removing components.

4.1 Power Supply and Power Connections 75
Power Connectors 75
4.2 Headers and Connections 77
Chassis Intrusion 77
Front Control Panel Connector 77
External BMC I²C Header 80
External BMC I²C Header for Backplane 80
NVMe I²C Hot-Swap Header 81
Leakage Detection Sensor Connectors 81
M.2 Boot Tray Connector 82
MCIO PCIe 5.0 x8 Connectors 82
Modular Extensible I/O PCIe Connectors 82
NC-SI Connection 82
4.3 Jumper Settings 83
CMOS Clear 83
4.4 LED Indicators 85
Onboard Power LED 85

4.1 Power Supply and Power Connections

As with all computer products, a stable power source is necessary for proper and reliable operation. It is even more important for processors that have high CPU clock rates where noisy power transmission is present.

For information about the power connections of the AS -1116CS-TN server, refer to the following content.

Power Connectors

There are two 24-pin 12V power connectors (JPWR1, JPWR2) and one 18-pin management connector with 12 V standby power (JPWR3). JPWR1 and JPWR2 are 12-pin power and 12-pin Sideband PICPWR connectors.

24-pin Power Connector

Pin Definitions

Pin#	Definition	Pin#	Definition
S1	SB1_A	1	GND
S2	SB2_A	2	GND
S3	SB3_A	3	GND
S4	SB4_A	4	GND
S5	SB5_A	5	GND
S6	SB6_A	6	GND
S7	SB1_B	7	12 V
S8	SB2_B	8	12 V
S9	SB3_B	9	12 V
S10	SB4_B	10	12 V
S11	SCL_B	11	12 V
S12	SDA_B	12	12 V

Management Connector

The motherboard can manage other boards through CPLD on PDB using the management connector. The management connector JPWR3 includes 12V standby power support.

18-pin Management Connector Pin Definitions			
Pin#	**Definition**	**Pin**	**Definition**
A1	12 V standby	B1	12 V standby
A2	ISENSE	B2	VENSE
A3	12 V standby	B3	12 V standby
A4	GND	B4	GND
A5	SLOAD	B5	SCLOCK
A6	SDATAOUT	B6	GND
A7	GND	B7	SDATAIN
A8	PMBUS_SCL	B8	GND
A9	PMBUS_SDA	B9	FLEXIO

4.2 Headers and Connections

For information about the headers on the H14SHM motherboard, refer to the following content.

Chassis Intrusion

A 3-pin Chassis Intrusion header is located at JL1 on the H14SHM motherboard. Attach the appropriate cable from the chassis to inform you when the chassis is opened.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Chassis Intrusion Pin Definitions	
Pin#	**Definition**
1	CABLE_PRESENT
2	GND
3	INTRUSION

Front Control Panel Connector

JFP1 contains header pins for various buttons and indicators that are normally located on a control panel at the front of the chassis. These connectors are designed specifically for use with the Supermicro chassis. See the table below for the descriptions of the front control panel buttons and LED indicators.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Front Control Panel Connector JFP1 Pin Definitions: 20 total			
Pin#	**Definition**	**Pin**	**Definition**
20	GND	19	PWR_FAIL_LED_N
18	no connection	17	no connection
16	no connection	15	PWR_FAIL_LED_P
14	GND	13	I2C_SCL
12	I2C_SDA	11	GND
10	+3.3 V	9	PWR_LED_N

Front Control Panel Connector JFP1 Pin Definitions: 20 total			
Pin#	**Definition**	**Pin**	**Definition**
8	no connection	7	DRV_LED-N
6	LAN1_LED_N	5	LAN2_LED_N
4	INFO_LED_N	3	UID_LED_N
2	UID_BTN_N	1	PWR_BTN_N

Power Button

The power button connection is located on pin 1 of the front control panel header located at JFP1. Momentarily contacting pin 1 will power on/off the system.

Unit Identifier (UID) Button

The Unit Identifier (UID) button connection is located on pin 2 of the front control panel header JFP1. When you push UID button, UID LED illuminates. Push the button again to turn off UID LED. The UID LED provides easy identification of a system unit that may need service.

UID LED

The unit identifier LED connection is located on pin 3 of JFP1 on the H14SHM motherboard.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Information LED

The Information LED for Fail indicator for overheat, fan fail, power fail, and UID is located on pins 3 and 4 of JFP1. It provides warnings of overheating, power failure, or fan failure for the system. Refer to the table below for more information.

Information LED (OH/Fan Fail/PWR Fail/UID) LED States	
Status	**Description**
Red, solid on	Overheating has occurred.
Red, blinking (1 Hz)	Fan failure: check for an inoperative fan.
Red, blinking slow (0.25 Hz)	Power failure: check for a non-operational power supply.
Red, blinking fast (10 Hz)	CPLD recovery mode error(s).
Blue, solid on	Unit identifier (UID) has been activated locally. Use this function to locate a unit in the system that might need service.

Information LED (OH/Fan Fail/PWR Fail/UID) LED States	
Status	**Description**
Blue, blinking (1 Hz)	UID has been activated remotely. Use this function to identify a unit that might need service.
Blue, blinking fast (10 Hz)	BIOS/BMC: recovery and/or update in progress.

LAN1/LAN2 (NIC1/NIC2) LED

The Network Interface Controller (NIC) LED connection for LAN Port 1 is located on pin 6 of JFP1 on the H14SHM motherboard, and LAN Port 2 is on pin 5.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

LAN1/LAN2 LED LED States	
Color	**State**
NIC 2: Blinking green	LAN 2: Active
NIC 1: Blinking green	LAN 1: Active

Storage Drive Activity LED

The storage drive activity LED connection is located on pin 7 of JFP1 on the H14SHM motherboard. When this LED is blinking green, it indicates storage drive activity.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Storage Drive Activity LED LED State	
Color	**State**
Blinking Green	Storage Drive Activity

Front Panel Power LED

The front panel power LED connector is located at pin 9 on JFP1 on the motherboard.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

System Status LED Indicator	
Status	**Event**
Green: Solid on	System power on
Green, 1 Hz slow blinking	BMC/BIOS checking
Green, 4 Hz fast blinking	BIOS recovery/update in progress

Front Panel I²C

A front panel I²C for temperature sensor connection is located on pins 12 and 13 of JFP1 to provide power to the system when it is in standby mode.

Power Fail LED Indicators

Power Failure LED Indicators are located on pins 15 and 19 of JFP1 on the H14SHM motherboard.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

FP Power LED Pin Definitions (JFP1)	
Pin#	**Definition**
15	PWR Failure LED-Positive
19	PWR Failure LED-Negative

External BMC I²C Header

A System Management Bus header for the BMC is located at JIPMB1 on the H14SHM motherboard. Connect the appropriate cable here to use the IPMB I²C connection on your system.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

External BMC I²C Header for Backplane

A System Management Bus 4-pin header for the BMC is located at JBPNI²C1 on the H14SHM motherboard. Connect the appropriate cable here to connect the BMC to the backplane.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

External I²C Header Pin Definitions: Four Total	
Pin#	**Definition**
1	Data
2	GND
3	Clock
4	+3.3 V

NVMe I²C Hot-Swap Header

Connector JNVI2C1 is a management header for the Supermicro NVMe backplane hot-swap support. Connect the I²C cable to this connector.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

NVMe I²C Hot-Swap Header Pin Definitions: Four Total	
Pin#	**Definition**
1	Data
2	GND
3	Clock
4	P3V3

Leakage Detection Sensor Connectors

The leakage detection sensor connectors are JSEN2 and JSEN3. Connect the leakage detection sensor cable of the liquid cooling module here to support the sensor information on your system.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Leakage Detection Sensor Connector Pin Definitions	
Pin#	**Definition**
1	SENSOR_IN
2	GND

M.2 Boot Tray Connector

Use the M.2-C connector located on the H14SHM motherboard to connect an M.2 boot tray for AOM-DCM2-BOOT use.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

MCIO PCIe 5.0 x8 Connectors

Mini Cool Edge IO (MCIO) PCIe 5.0 x8 connectors are located at NVMe0/1, NVMe2/3, NVMe4/5, NVMe6/7, NVMe8/9, NVMe10/11, NVMe12/13, NVMe14/15, NVMe16/17, and NVMe18/19 on the motherboard.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Modular Extensible I/O PCIe Connectors

Modular Extensible PCIe 5.0 x16 slots are P1MXIO1 and P1MXIO2.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

NC-SI Connection

The Network Controller Sideband Interface (NC-SI) connection is located at JNCSI1 on the H14SHM motherboard. This connection is used to connect a Network Interface Card (NIC) to the motherboard to allow the onboard Baseboard Management Controller (BMC) to communicate with a network.

Note: For detailed instructions on how to configure Network Interface Card (NIC) settings, refer to the Network Interface Card Configuration User's Guide posted on the web page under the link: https://www.supermicro.com/support/manuals.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

4.3 Jumper Settings

To modify the operation of the motherboard, jumpers can be used to choose between optional settings. Jumpers create shorts between two pins to change the function of the connector. Pin 1 is identified with a square solder pad on the printed circuit board. See the diagram below for an example of jumping pins 1 and 2. Refer to the motherboard layout page for jumper locations.

Note: On two-pin jumpers, "Closed" means the jumper is on and "Open" means the jumper is off the pins.

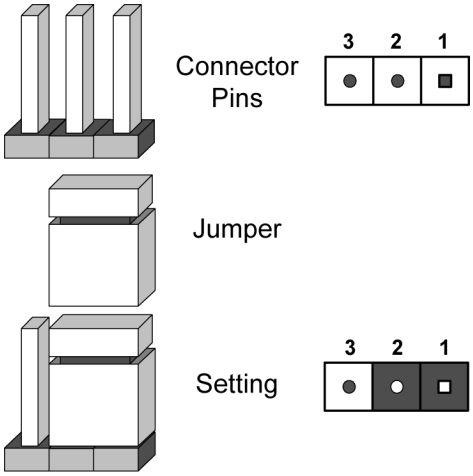


Figure 4-1. Jumping Connector Pins

CMOS Clear

JBT1 on the H14SHM motherboard is used to clear CMOS, which will also clear any passwords. Instead of pins, this jumper consists of contact pads to prevent accidentally clearing the contents of CMOS.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.



1. First power down the system and unplug the power cord(s).
2. Remove the cover of the chassis to access the motherboard.
3. Remove the onboard battery from the motherboard.

4. Short the CMOS pads, JBT1, with a metal object such as a small screwdriver for at least four seconds.

   Note: Clearing CMOS will also clear all passwords.

5. Remove the screwdriver (or shorting device).
6. Replace the cover, reconnect the power cord(s), and power on the system.

4.4 LED Indicators

For information about the LED indicators on the AS -1116CS-TN server, refer to the following content.

Onboard Power LED

The onboard power is indicated by LED2 on the motherboard.

For a detailed diagram of the H14SHM motherboard, see the layout under "Motherboard Quick Reference" on page 22.

Onboard Power LED Indicator	
LED Color	**Definition**
Off	System power off
Green, blinking	BMC initializing
Green, solid	System power on

Chapter 5:

Software

After the AS -1116CS-TN server has been installed, you can install the Operating System (OS), configure RAID settings, and install the drivers.

5.1 Microsoft Windows OS Installation **87**

Installing the OS 87

5.2 Driver Installation **89**

5.3 BMC **90**

BMC ADMIN User Password 90

5.1 Microsoft Windows OS Installation

If you will be using RAID, you must configure RAID settings before installing the Windows OS and the RAID driver. Refer to the RAID Configuration User Guides posted on our website at https://www.supermicro.com/support/manuals.

Installing the OS

1. Create a method to access the Microsoft Windows installation ISO file. That can be a USB flash or media drive, or the BMC KVM console.
2. Retrieve the proper drivers. Go to the Supermicro web page for your motherboard and click on "Download the Latest Drivers and Utilities," select the proper driver, and copy it to a USB flash drive.
3. Boot from a bootable device with Windows OS installation. You can see a bootable device list by pressing <F11> during the system bootup.

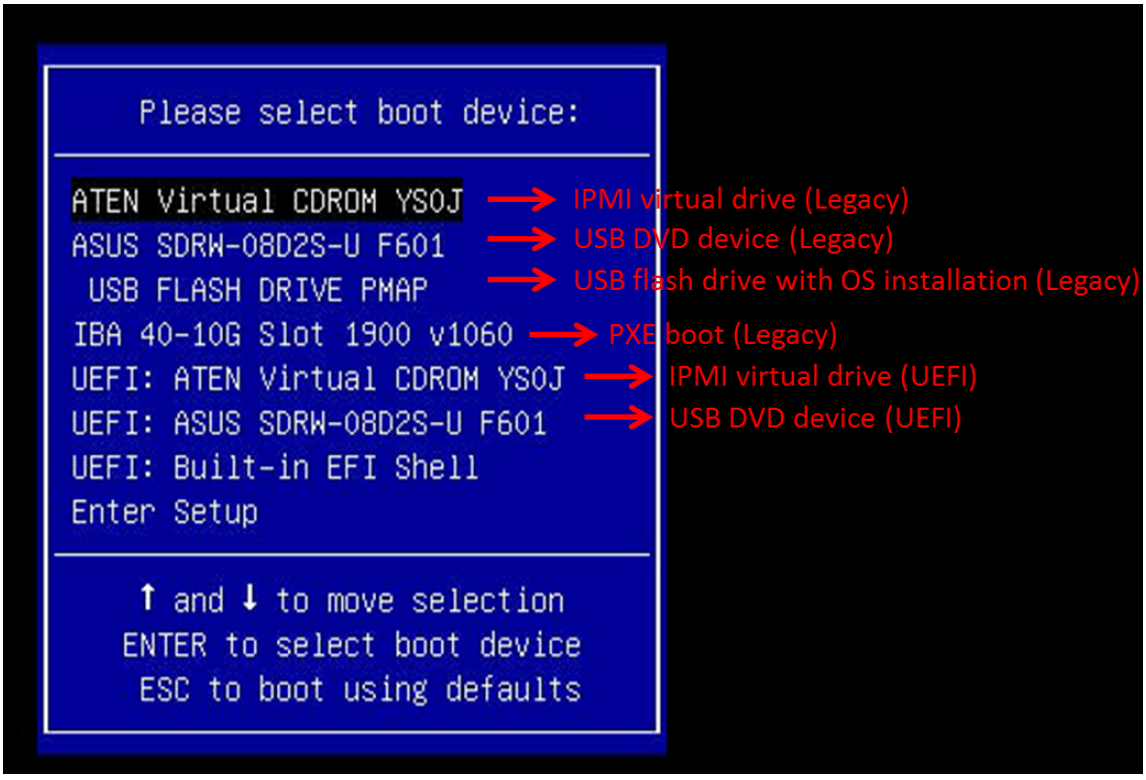


Figure 5-1. Selecting the Boot Device

4. During Windows Setup, continue to the dialog box where you select the drives on which to install Windows. If the disk you want to use is not listed, click on the “Load driver” link at the bottom left corner.

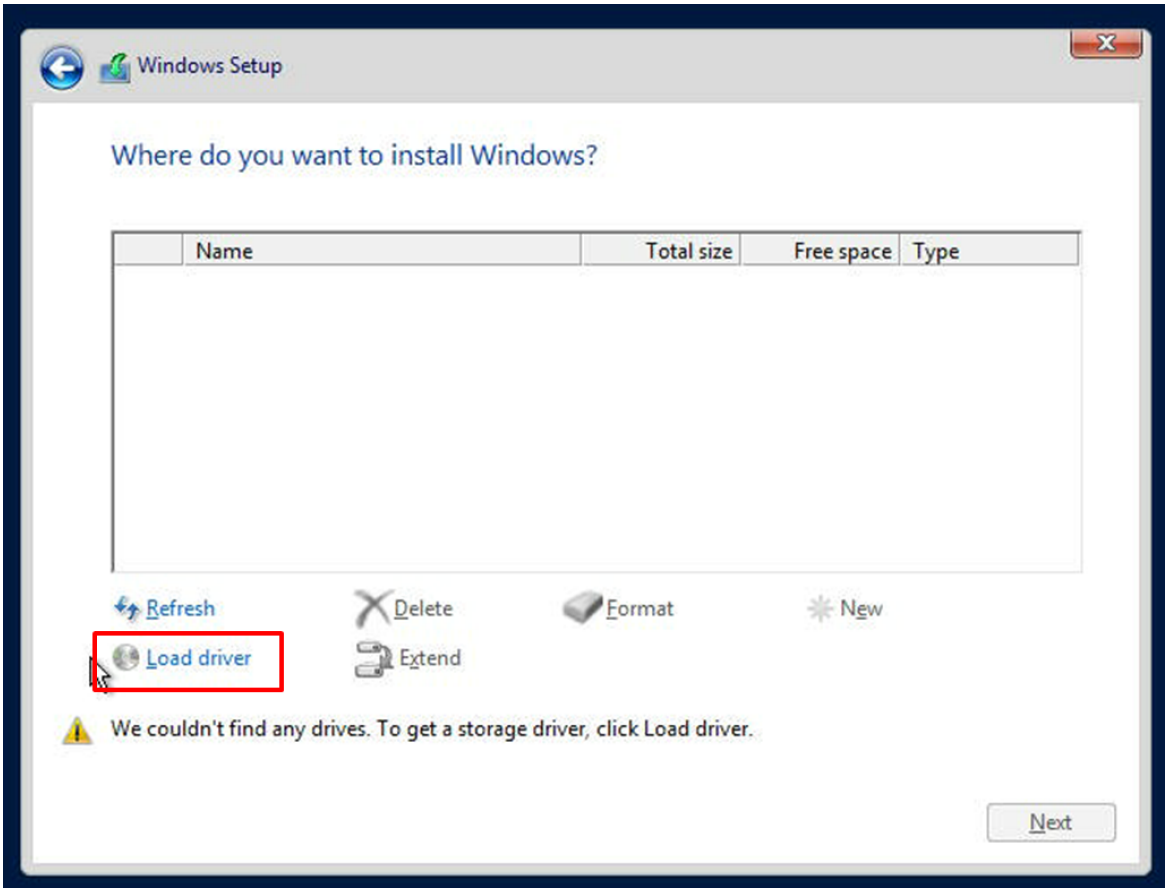


Figure 5-2. Loading the Driver Link

To load the driver, browse the USB flash drive for the proper driver files.

5. Once all devices are specified, continue with the installation.
6. After the Windows OS installation has completed, the system will automatically reboot multiple times for system updates.

5.2 Driver Installation

The Supermicro website contains drivers and utilities for your system at the following page:

https://www.supermicro.com/wdl.

Some of these drivers and utilities must be installed, such as the chipset driver. After accessing the website, go into the CDR_Images (in the parent directory of the above link) and locate the ISO file for your motherboard. Download this file to a USB flash or media drive. You may also use a utility to extract the ISO file if preferred.

Another option is to go to the Supermicro website at https://www.supermicro.com. Find the product page for your motherboard and download the latest drivers and utilities. Insert the flash drive or disk, and the screenshot shown below should appear.

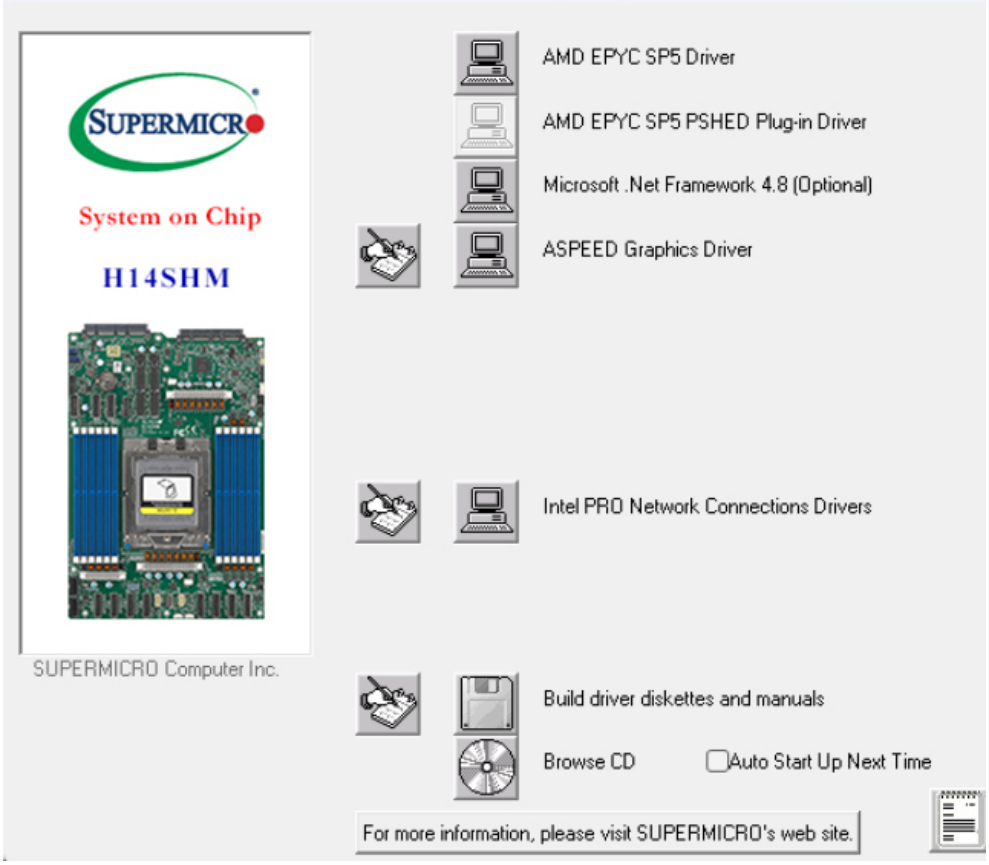


Figure 5-3. Driver Download Screenshot

Note: Click the icons showing a hand writing on paper to view the readme files for each item. Click the computer icons to the right of these items to install each item (from top to bottom) one at a time. *After installing each item, you must reboot the system before moving on to the next item on the list.* The bottom icon with a CD on it allows you to view the entire contents.

5.3 BMC

The H14SHM motherboard provides remote access, monitoring, and management through the baseboard management controller (BMC) and other management controllers distributed among different system modules. There are several BIOS settings that are related to BMC. For general documentation and information on BMC, visit our website at the following page:

https://www.supermicro.com/en/solutions/management-software/bmc-resources

BMC ADMIN User Password

For security, each system is assigned a unique default BMC password for the ADMIN user. The password can be found on a sticker on the motherboard and a sticker on the chassis, for Supermicro chassis. The sticker also displays the BMC MAC address. If necessary, the password can be reset using the Supermicro SAA tool.



Figure 5-4. BMC Password Label

Chapter 6:

Optional Components

This chapter describes alternate configurations and optional system components for the AS -1116CS-TN server.

6.1 Storage Protocols Supported **92**
6.2 Storage Control Cards **93**
6.3 Configuration Ordering Information **94**
8 Drive Bay Configurations 94
12 Drive Bay Configurations 95
6.4 TPM Security Module **96**
6.5 Power Supply Modules **97**

6.1 Storage Protocols Supported

The storage drive bays can support SATA, SAS, and NVMe in any combination. Additional hardware is required to enable SAS, SATA, and NVMe.

- SATA – The system can support up to twelve SATA drives from the onboard SATA controller.
- SAS – The system can support up to twelve SAS drives with one of the supported add-on storage controller cards. See "Storage Control Cards" on the next page
- NVMe – The system can support up to twelve NVMe drives.

6.2 Storage Control Cards

Storage Control Card Options	
AOC SKU	**Description**
AOC-S3908L-H8iR-16DD	SAS RAID Adapter (RAID 0, 1, 5, 6, 10, 50, 60), eight internal SAS3 ports, Supports up to 16 physical devices with expander, One SlimSAS and eight black (100-Ohm) connector
AOC-S3916L-H16iR-32DD	SAS RAID Adapter (RAID 0, 1, 5, 6, 10, 50, 60), 16 internal SAS3 ports, Supports up to 32 physical devices with expander, Two SlimSAS eight black (100-Ohm) connectors
AOC-S3808L-L8iT	SAS Host Bus Adapter (IT mode), eight internal SAS3 ports, Supports up to 122 physical devices with expander, One SlimSAS and eight black (100-Ohm) connectors
AOC-S3816L-L16iT	SAS Host Bus Adapter (IT mode), 16 internal SAS3 ports, Supports up to 122 physical devices with expander, Two SlimSAS and eight black (100-Ohm) connectors

6.3 Configuration Ordering Information

The AS -1116CS-TN server supports multiple configurations, which require the following parts.

8 Drive Bay Configurations



Figure 6-1. Eight-Drive Bay Configurations

Option 1: 8 NVMe		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-7	NVMe	CBL-MCIO-1245M5RE CBL-MCIO-1330M5 (x2) CBL-MCIO-1339M5R MCP-220-11902-0B (x2)

Option 2: 8 SATA		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-7	SATA	CBL-CDAT-1062Y-45 CBL-MCIO-1255L4Y MCP-220-11902-0B (x2)

Option 3: 8 SAS		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-7	SAS	CBL-CDAT-1062Y-45 CBL-SAST-1273LP-100 MCP-220-11902-0B (x2) SAS AOC (39xx/38xx, etc.)

12 Drive Bay Configurations



Figure 6-2. 12-Drive Bay Configurations

Option 4: 12 NVMe		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-11	NVMe	CBL-MCIO-1245M5RE CBL-MCIO-1330M5 (x2) CBL-MCIO-1339M5R CBL-MCIO-1340M5-1 CBL-MCIO-1226M5 BPN-NVME5-HS119N-S4R CBL-PWEX-1136-70 MCP-220-00178-0B (x4)

Option 5: 12 SATA		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-11	SATA	CBL-CDAT-1062Y-45 CBL-MCIO-1255L4Y (x2) BPN-NVME5-HS119N-S4R CBL-PWEX-1136-70 MCP-220-00178-0B (x4)

Option 6: 12 SAS		
Drive Bay #	**Drive Type**	**Part Numbers**
Drive Bays 0-11	SAS	CBL-CDAT-1062Y-45 CBL-SAST-1273LP-100 (x2) BPN-NVME5-HS119N-S4R CBL-PWEX-1136-70 MCP-220-00178-0B (x4) SAS AOC (3916/3816, etc.)

6.4 TPM Security Module

SPI capable TPM 2.0 (or 1.2) with Infineon 9670 controller, vertical form factor.

The JTPM1 header is used to connect a Trusted Platform Module (TPM). A TPM is a security device that supports encryption and authentication in hard drives. It enables the H14SHM motherboard to deny access if the TPM associated with the hard drive is not installed in the AS -1116CS-TN server.

For details and installation procedures, refer to the following page:

https://www.supermicro.com/manuals/other/AOM-TPM-9670V_9670H__X12_H12.pdf

- AOM-TPM-9672SCM

6.5 Power Supply Modules

Select your system's power supply based on system configurations.

Power Supply Modules		
Watts	**Part Number**	**80 Plus Level**
1000 W	PWS-1K04A-1R	Titanium
2000 W	PWS-2K09A-1R	Titanium

Chapter 7:

Troubleshooting and Support

The following content contains information on common issues and how to resolve them.

7.1 Online Resources **99**
Direct Links for the AS -1116CS-TN System 99
Direct Links for General Support and Information 99
7.2 Baseboard Management Controller (BMC) **100**
7.3 Troubleshooting Procedures **101**
Before Power On 101
No Power 101
No Video 101
System Boot Failure 101
Memory Errors 102
Losing the System's Setup Configuration 102
If the System Becomes Unstable 102
7.4 CMOS Clear **104**
7.5 Motherboard Battery **105**
7.6 Where to Get Replacement Components **106**
7.7 Technical Support Procedures **107**
Returning Merchandise for Service 107
7.8 Feedback **109**

7.1 Online Resources

A great deal of information is available on the Supermicro website. From the top menu of the Supermicro home page at https://www.supermicro.com:

- Specifications for servers and other hardware are available by clicking **Products**.
- The **Support** option offers downloads (manuals, BIOS/BMC, drivers, etc.), FAQs, RMA, warranty, and other service extensions.

Direct Links for the AS -1116CS-TN System

- AS -1116CS-TN system specifications page:

  https://www.supermicro.com/en/products/system/clouddc/1u/as-1116cs-tn

- H14SHM motherboard page for links to the quick reference guide, user manual, validated storage drives, and more:

  https://www.supermicro.com/en/products/motherboard/h14shm

Direct Links for General Support and Information

- Frequently Asked Questions: https://www.supermicro.com/FAQ/index.php
- TPM User Guide: https://www.supermicro.com/manuals/other/AOM-TPM-9670V_9670H__X12_H12.pdf
- BMC User Guide: https://www.supermicro.com/manuals/other/BMC_IPMI_X14_H14.pdf
- Product Resources page for validated memory details: https://www.supermicro.com/support/resources/mem.cfm
- Product Matrices page for links to tables summarizing specs for systems, motherboards, power supplies, riser cards, add-on cards, and more: https://www.supermicro.com/en/support/product-matrices
- Security Center for recent security notices: https://www.supermicro.com/en/support/security_center
- Supermicro Phone and Addresses: https://www.supermicro.com/en/about/contact

7.2 Baseboard Management Controller (BMC)

The AS -1116CS-TN server supports the Baseboard Management Controller (BMC). BMC is used to provide remote access, monitoring, and management. There are several BIOS settings that are related to BMC.

For general documentation and information on BMC, visit our website at the following page:

https://www.supermicro.com/en/solutions/management-software/bmc-resources

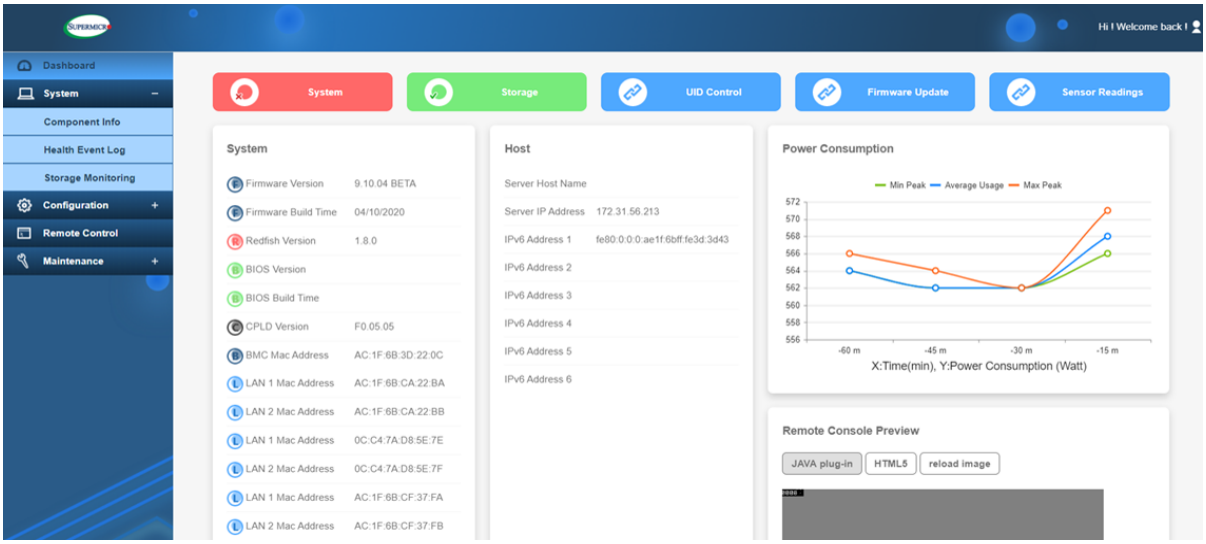


Figure 7-1. BMC Dashboard

7.3 Troubleshooting Procedures

Use the following procedures to troubleshoot your system. If you have followed all of the procedures below and still need assistance, refer to the "Technical Support Procedures" on page 107 section in this chapter. Always disconnect the AC power cord before adding, changing or installing any non hot-swap hardware components. If the below steps do not fix the setup configuration problem, contact your vendor for repairs.

Before Power On

1. Make sure that there are no short circuits between the motherboard and chassis.
2. Disconnect all ribbon/wire cables from the motherboard, including those for the keyboard and mouse.
3. Remove all add-on cards.
4. Install the processor (making sure it is fully seated) and connect the front panel connectors to the motherboard.

No Power

1. Make sure that there are no short circuits between the motherboard and the chassis.
2. The battery on your motherboard may be old. Check to verify that it still supplies approximately 3 VDC. If it does not, replace it with a new one.

No Video

1. If the power is on, but you do not have video, remove all add-on cards and cables.
2. Remove all memory modules and turn on the system (if the alarm is on, check the specs of memory modules, reset the memory, or try a different one).

System Boot Failure

If the system does not display Power-On-Self-Test (POST) or does not respond after the power is turned on, do the following:

1. Remove all components from the motherboard, especially the DIMMs. Power on the system and check if the power-on LED and the BMC Heartbeat LED are on, and system fans are spinning.

2. Turn on the system with only one DIMM installed. If the system boots, check for bad DIMMs or slots by following the Memory Errors Troubleshooting procedure in this chapter.

Memory Errors

When suspecting faulty memory is causing the system issue, check the following:

1. Make sure that the memory modules are compatible with the system and are properly installed. See "Maintenance and Component Installation" on page 40 for installation instructions. (For memory compatibility, refer to the "Tested Memory List" link on the motherboard's product page to see a list of supported memory.)
2. Check if different speeds of DIMMs have been installed. It is strongly recommended that you use the same RAM type and speed for all DIMMs in the system.
3. Make sure that you are using the correct type of DIMMs recommended by the manufacturer.
4. Check for bad DIMMs or slots by swapping a single module among all memory slots and check the results.

Losing the System's Setup Configuration

1. Make sure that you are using a high-quality power supply. A poor-quality power supply may cause the system to lose the CMOS setup information. Refer to "Introduction" on page 12 for details on recommended power supplies.
2. The battery on your motherboard may be old. Check to verify that it still supplies approximately 3 VDC. If it does not, replace it with a new one.

If the System Becomes Unstable

If the system becomes unstable during or after OS installation, check the following:

1. Processor/BIOS support: Make sure that your processor is supported and that you have the latest BIOS installed in your system.
2. Memory support: Make sure that the memory modules are supported. Refer to the product page on our website at https://www.supermicro.com. Test the modules using memtest86 or a similar utility.

   Note: Click on the "Tested Memory List" link on the motherboard's product page to see a list of supported memory.

3. Storage Drive support: Make sure that all storage drives work properly. Replace the failed storage drives with good ones.
4. System cooling: Check the system cooling to make sure that all heatsink fans and processor/system fans, etc., work properly. Check the hardware monitoring settings in the BMC to make sure that the processor and system temperatures are within the normal range. Also, check the front panel Overheat LED and make sure that it is not on.
5. Adequate power supply: Make sure that the power supply provides adequate power to the system. Make sure that all power connectors are connected. Refer to our website for more information on the minimum power requirements.
6. Proper software support: Make sure that the correct drivers are used.

If the system becomes unstable before or during OS installation, check the following:

1. Source of installation: Make sure that the devices used for installation are working properly, including boot devices such as a CD/Media drive.
2. Cable connection: Check to make sure that all cables are connected and working properly.
3. Use the minimum configuration for troubleshooting: Remove all unnecessary components (starting with add-on cards first), and use the minimum configuration (but with the processor and a memory module installed) to identify the trouble areas. Refer to the steps listed above in this section for proper troubleshooting procedures.
4. Identify bad components by isolating them: If necessary, remove a component in question from the chassis, and test it in isolation to make sure that it works properly. Replace a bad component with a good one.
5. Check and change one component at a time instead of changing several items at the same time. This will help isolate and identify the problem.
6. To find out if a component is good, swap this component with a new one to see if the system will work properly. If so, then the old component is bad. You can also install the component in question in another system. If the new system works, the component is good and the old system has problems.

7.4 CMOS Clear

JBT1 on the H14SHM motherboard is used to clear CMOS, which will also clear any passwords. For information on clearing CMOS, refer to "CMOS Clear" on page 83 earlier in this manual.

7.5 Motherboard Battery

For information on removing, disposing of, and replacing the motherboard battery of your system, refer to "Motherboard Battery Removal and Installation" on page 59.

7.6 Where to Get Replacement Components

If you need replacement parts for your AS -1116CS-TN server, to ensure the highest level of professional service and technical support, purchase exclusively from our Supermicro Authorized Distributors/System Integrators/Resellers. A list can be found on the Supermicro website:

https://www.supermicro.com

Under the "Buy" menu, click the "Where to Buy" link.

7.7 Technical Support Procedures

Before contacting Technical Support, take the following steps. Also, note that as a motherboard manufacturer, Supermicro also sells motherboards through its channels, so it is best to first check with your distributor or reseller for troubleshooting services. They should know of any possible problems with the specific system configuration that was sold to you.

1. Refer to "Troubleshooting Procedures" on page 101 or see the FAQs on our website (https://www.supermicro.com/FAQ/index.php) before contacting Technical Support.
2. BIOS upgrades can be downloaded from our website (https://www.supermicro.com/support/resources/bios_ipmi.php).
3. If you still cannot resolve the problem, include the following information when contacting Supermicro for technical support:
   - Motherboard model and PCB revision number
   - BIOS release date/version (This can be seen on the initial display when your system first boots up.)
   - System configuration
4. An example of a Technical Support form is on our website at https://webpr3.supermicro.com/SupportPortal.
5. Distributors: For immediate assistance, have your account number ready when placing a call to our Technical Support department. For Supermicro contact information, refer to "Contacting Supermicro" on page 11.

Returning Merchandise for Service

A receipt or copy of your invoice marked with the date of purchase is required before any warranty service will be rendered. You can obtain service by calling your vendor for a Returned Merchandise Authorization (RMA) number. When returning the server to the manufacturer, the RMA number should be prominently displayed on the outside of the shipping carton, and the shipping package is mailed prepaid or hand-carried. Shipping and handling charges will be applied for all orders that must be mailed when service is complete.

For faster service, RMA authorizations can be requested online at the following page:

https://www.supermicro.com/RmaForm

Whenever possible, repack the server in the original Supermicro carton, using the original packaging material. If these are no longer available, be sure to pack the server securely, using packaging material to surround the server so that it does not shift within the carton and become damaged during shipping.

This warranty only covers normal consumer use and does not cover damages incurred in shipping or from failure due to the alternation, misuse, abuse or improper maintenance of products.

During the warranty period, contact your distributor first for any product problems.

7.8 Feedback

Supermicro values your feedback as we strive to improve our customer experience in all facets of our business. Email us at Techwriterteam@supermicro.com to provide feedback on our manuals.

Chapter 8:

UEFI BIOS

The following content contains information on BIOS configuration with the AS -1116CS-TN server.

8.1 Introduction **111**
8.2 Main Setup **113**
8.3 Advanced Setup Configurations **115**
8.4 BMC **139**
8.5 Event Logs **143**
8.6 Security **145**
8.7 Boot **147**
8.8 Save & Exit **149**

8.1 Introduction

This chapter describes the AMIBIOS™ Setup utility for the motherboard. The BIOS is stored on a chip and can be easily upgraded using the UEFI script (flash.nsh), the BMC WebUI, or the SuperServer Automation Assistant (SAA) utility.

Note: Due to periodic changes to the BIOS, some settings may have been added or deleted and might not yet be recorded in this manual. Refer to the Manual Download area of our website for any changes to BIOS that may not be reflected in this manual.

Updating BIOS

It is recommended that you do not upgrade your BIOS if you are not experiencing any problems with your system. Updated BIOS files are located on our website at the following page:

https://www.supermicro.com/support/resources/bios_ipmi.php

Check our BIOS warning message and the information on how to update your BIOS on our website. Select your motherboard model and download the BIOS file to your computer. Also, check the current BIOS revision to make sure that it is newer than your BIOS before downloading.

Important: Do not shut down or reset the system while updating the BIOS to prevent possible system boot failure! Read the motherboard README file carefully before you perform the BIOS update.

To update the BIOS under the UEFI Shell, unzip the BIOS file onto a bootable USB device and then boot into the built-in UEFI Shell. For motherboards with BMC support, type "flash.nsh <BIOS filename><BMC Username><BMC Password>" to start the BIOS update. The flash.nsh script will invoke the SAA (EFI) tool automatically to perform the BIOS update, beginning with uploading the BIOS image to BMC. After uploading the BIOS image, the system will reboot to continue the process. The BMC will take over and continue the BIOS update in the background. The process will take 3–5 minutes. Refer to the README file for more information.

Starting the Setup Utility

To enter the BIOS Setup utility, press the <Delete> key while the system is booting-up. In most cases, the <Delete> key is used to invoke the BIOS Setup screen. There are a few cases when other hot keys are used, such as <F1>, <F2>, etc. Each main BIOS menu option is described in this manual.

The Main BIOS screen has two main frames. The left frame displays all the options that can be configured. “Grayed-out” options cannot be configured. The right frame displays the key legend. Above the key legend is an area reserved for a text message. When a BIOS submenu or item is selected in the left frame, it is highlighted in white. Often a text message will accompany it. (Note that BIOS has default text messages built in. We retain the option to include, omit, or change any of these text messages.) Settings printed in Bold are the default values.

A "►" indicates a submenu. Highlighting such an item and pressing the <Enter> key open the list of settings within that submenu.

The BIOS Setup utility uses a key-based navigation system called hot keys. Most of these hot keys (<F1>, <F2>, <F3>, <F4>, <F5>, <F6>, <Enter>, <ESC>, the arrow keys, etc.) can be used at any time during the setup navigation process.

8.2 Main Setup

The Main setup screen appears when the AMI BIOS Setup utility is first entered. To return to the Main setup screen, select the Main tab at the top of the screen. The Main BIOS setup screen is shown below.

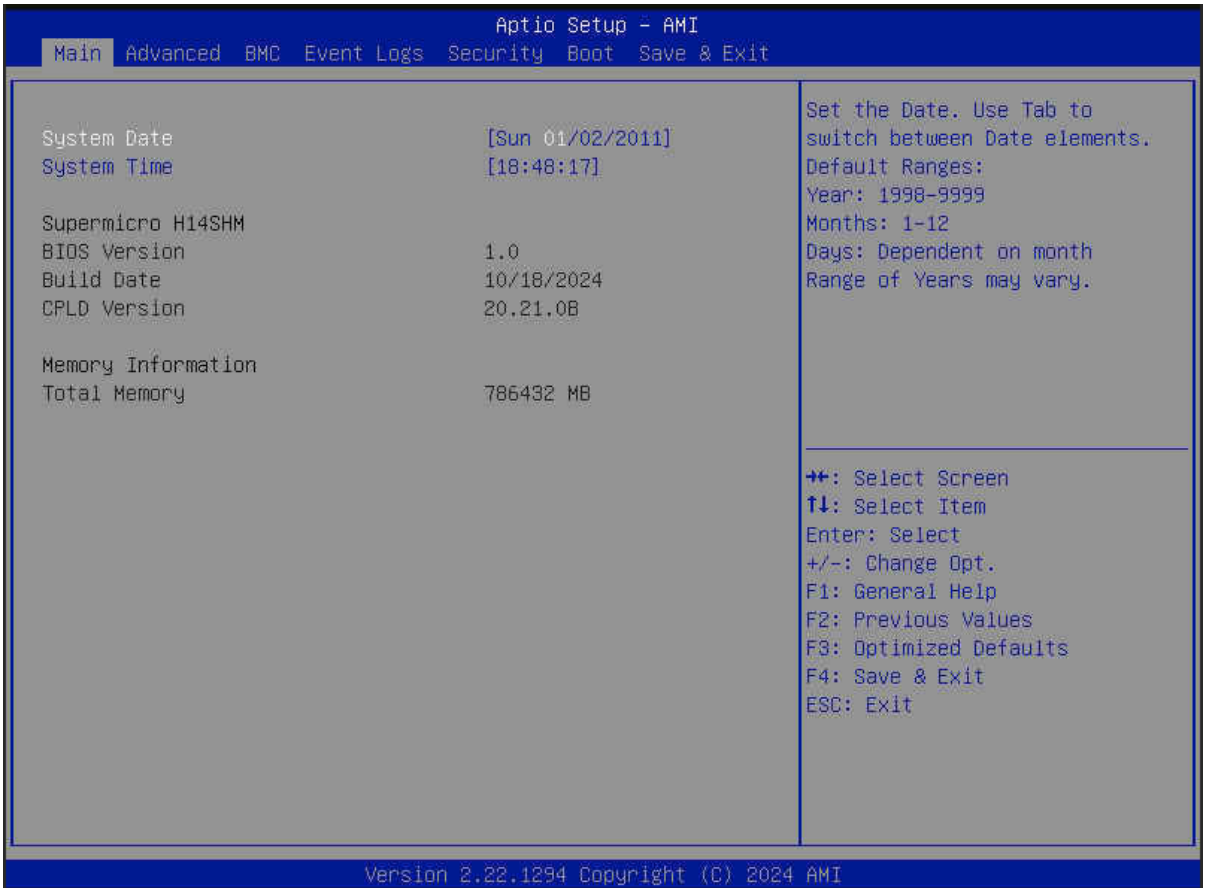


Figure 8-1. BIOS Main Tab Screen

System Date/System Time

Use the two features to change the system date and time. Highlight **System Date** or **System Time** using the arrow keys. Enter new values using the keyboard. Press the <Tab> key or the arrow keys to move between fields. The date must be entered in MM/DD/YYYY format. The time is entered in HH:MM:SS format.

Note: The time is in the 24-hour format. For example, 5:30 P.M. appears as 17:30:00.

Supermicro H14SHM

BIOS Version

This feature displays the version of the BIOS ROM used in the system.

Build Date

This feature displays the date when the version of the BIOS ROM used in the system was built.

CPLD Version

This feature displays the version of the Complex-Programmable Logical Device (CPLD) used in the system.

Memory Information

Total Memory

This feature displays the total size of memory available in the system.

8.3 Advanced Setup Configurations

Use the arrow keys to select the Advanced submenu and press <Enter> to access the submenu items.

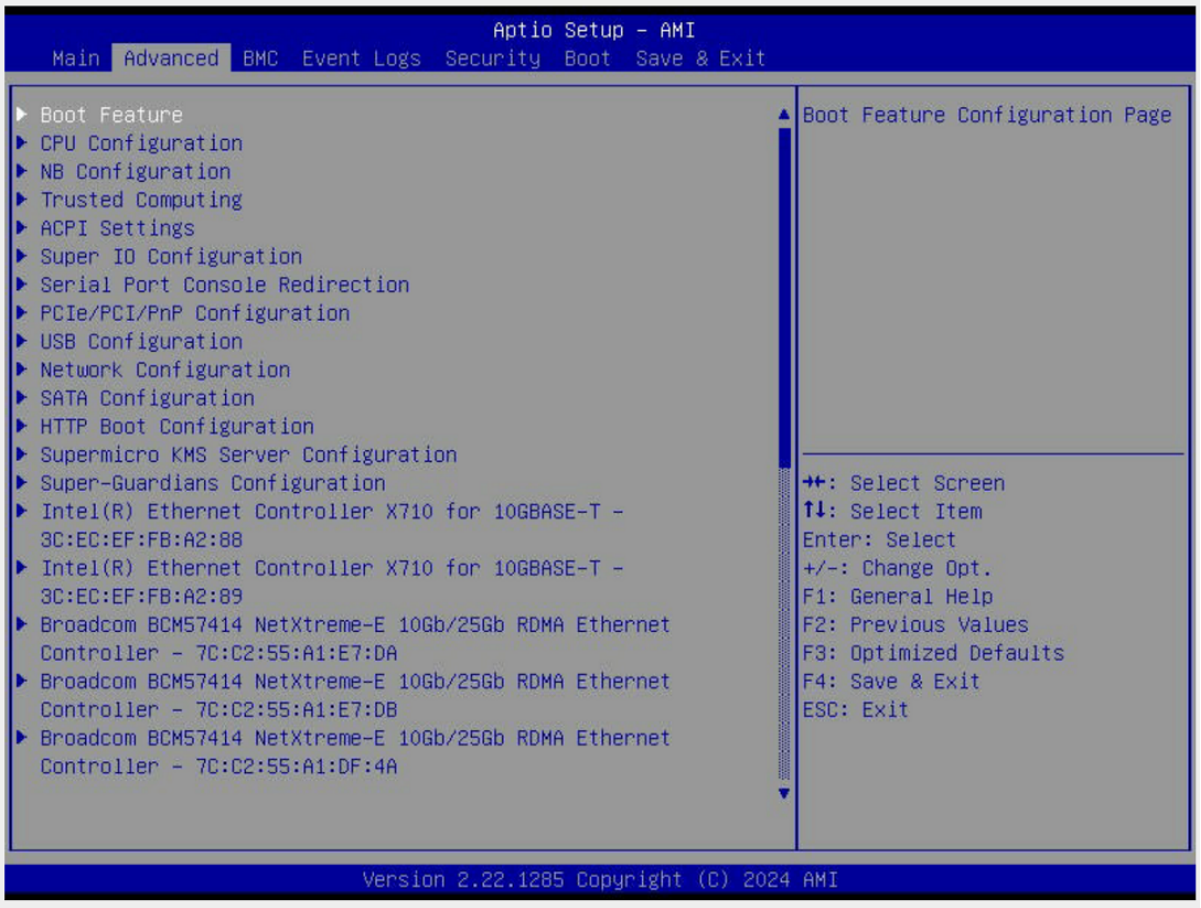


Figure 8-2. Advanced Tab Screen

Warning! Take caution when changing the Advanced settings. An incorrect value, an improper DRAM frequency, or a wrong BIOS timing setting may cause the system to malfunction. When this occurs, revert the setting to the manufacture default settings.

Boot Feature Menu

►Boot Feature

Quiet Boot

Use this feature to select the screen between displaying the Power-on Self Test (POST) messages or the OEM logo upon bootup. Select Disabled to display the POST messages. Select Enabled to display the OEM logo instead of the normal POST messages. The options are Disabled and **Enabled**.

Note: BIOS POST messages are always displayed regardless of the setting of this feature.

Option ROM Messages

Use this feature to set the display mode for the Option ROM. Select Keep Current to display the current AddOn ROM display settings. Select Force BIOS to use the Option ROM display mode set by the system BIOS. The options are **Force BIOS** and Keep Current.

Bootup NumLock State

Use this feature to set the Power-on state for the <Numlock> key. The options are **On** and Off.

Wait For "F1" If Error

Select Enabled to force the system to wait until the <F1> key is pressed if an error occurs. The options are **Disabled** and Enabled.

Re-try Boot

If this feature is set to Enabled, the system BIOS will automatically reboot the system from an Extensible Firmware Interface (EFI) boot device after an initial boot failure. The options are **Disabled** and Enabled.

Power Configuration

Watch Dog Function

Select Enabled to allow the Watch Dog timer to reboot the system when it is inactive for more than five minutes. The options are **Disabled** and Enabled.

Watch Dog Action (Available when "Watch Dog Function" is set to Enabled)

Use this feature to configure the Watch Dog Time_out setting. The options are **Reset** and NMI.

Restore on AC Power Loss

Use this feature to set the power state after a power outage. Select Stay Off for the system power to remain off after a power loss. Select Power On for the system power to be turned on after a power loss. Select Last State to allow the system to resume its last power state before a power loss. The options are Stay Off, Power On, and **Last State**.

Power Button Function

This feature controls how the system shuts down when the power button is pressed. Select 4 Seconds Override to power off the system after pressing and holding the power button for four seconds or longer. Select Instant Off to instantly power off the system as soon as you press the power button. The options are **Instant Off** and 4 Seconds Override.

CPU Configuration Menu

CPU Configuration

Workload Profile

This function allows configuring the BIOS settings to match the selected workload. The options are **Disabled**, HPC, I/O, Virtualization, Telco NFVI, Telco NFVI-FP, and Telco FlexRAN.

SMT Control

This setting is used to disable symmetric multithreading. To re-enable SMT, a power cycle is needed after selecting the Enable option. Select Auto based on BIOS PCD default setting. The options are Disabled, Enabled, and **Auto**.

Core Performance Boost

Disable CPB. The options are Disabled and **Auto**.

Global C-state Control

Controls IO based C-state generation and DF C-states. The options are Disabled, Enabled, and **Auto**.

ACPI CST C2 Latency

Use this setting to enter in microseconds the decimal value. Larger C2 latency values will reduce the number of C2 transitions and reduce C2 residency. Fewer transitions can help when the performance is sensitive to the latency of C2 entry and exit. The default value is **100.**

PPIN Opt-in

Select Unlock/Enabled to use the Protected Processor Inventory Number (PPIN) in the system. The options are Disabled, Enabled, and **Auto**.

SMEE

Control secure memory encryption enable. The options are Disabled, Enabled, and **Auto**.

Fast Short REP MOVSB (FSRM)

The default is 1, but it can be set to zero for analysis purposes as long as the OS supports it. The options are **Auto**, Enabled, and Disabled.

Enhanced REP MOVSB/STOSB (ERSM)

This setting optimizes CPU string operations. Disabling ERSM (setting to 0) can be used for analysis purposes if supported by the operating system. The options are Disabled, Enabled, and **Auto**.

AVX512

Enable or disable AVX512. The options are **Auto**, Enabled, and Disabled.

Monitor and MWAIT Disable

The MONItor, MWAIT, MONITORX, and MWAITX opcodes become invalied when enabledt. The options are Enabled, Disabled, and **Auto**.

L1 Stream HW Prefetcher

Option to enable or disable L1 Stream HW Prefetcher. The options are Disabled, Enabled, and **Auto**.

L2 Stream HW Prefetcher

Option to enable or disable L2 Stream HW Prefetcher. The options are Disabled, Enabled, and **Auto**.

CCD Control

Sets the number of active CCDs. A power cycle is required once this option has been used to remove any CCDs. The options are **Auto**, 2 CCDs, 4 CCDs, 6 CCDs, 8 CCDs, 10 CCDs, 12 CCDs, and 14 CCDs.

Core Control

Sets the number of cores to be used. Once this option has been used to remove any cores, a power cycle is required for future selections to take effect. The options are **Auto**, ONE (1+0), TWO (2+0), THREE (3+0), FOUR (4+0), FIVE (5 +0), SIX (6+0), and SEVEN (7+0), TWO (1+1), FOUR (2+2), SIX (3+3), EIGHT (4+4), TEN (5+5), TWELVE (6+6), FOURTEEN (7+7).

SVM Mode

Enable or disable cpu virtualization. The options are Disabled, and **Enabled**.

►CPU1 Information

Changing the designed PCIe port bifurcation.

CPU1 PCIe Package Group P2 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

CPU1 PCIe Package Group G2 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

CPU1 PCIe Package Group P3 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

CPU1 PCIe Package Group G3 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, x16, and SATA

CPU1 PCIe Package Group P1 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

CPU1 PCIe Package Group G1 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

CPU1 PCIe Package Group P0 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, x16, and SATA

CPU1 PCIe Package Group G0 The options are **Auto**, x4x4x4x4, x4x4x8, x8x4x4, x8x8, and x16

NB Configuration

North Bridge Configuration

IOMMU

Use this setting to enable or disable IOMMU. The options are Disabled, Enabled, and **Auto**.

DMAr Support

Use this setting to enable DMAr system protection during POST (Power-On Self-Test). The options are Disabled, Enabled, and **Auto**.

DMA Protection

Use this setting to enable DMA remap support in the IVRS IVinfo field. The options are **Auto**, Enabled, and Disabled.

DRTM Virtual Device Support

This enables or disables the DRTM ACPI Virtual device. The options are Disabled, Enabled, and **Auto**.

DRTM Memory Reservation

This setting reserves 128 MB of memory below for DRTM security functions. It is required to for secured-core servers. The options are Disabled, Enabled, and **Auto**.

ACS Enable

This setting enables Access Control Service (ACS) functionality, which requires AER to be active. The options are Enabled, Disabled, and **Auto**.

TDP Control

Use this setting to set the processor's power consumption (TDP). The options are Manual and **Auto**.

Package Power Limit Control

Use Auto to apply the default power limit (PPT) or Manual to set a custom PPT. The options are Manual and **Auto**.

Determinism Control

Use this setting to configure the level of performance determinism. The options are Manual and **Auto**.

APBDIS

Use this setting to control the APBDIS feature. A value of 0 indicates "not APBDIS" (mission mode). The options are 0, 1, and **Auto**.

Power Profile Selection

Use this setting to select a power profile to optimize performance or efficiency. The options are High Performance Mode, Efficiency Mode, Maximum IO Performance Mode, Balanced Memory Performance Mode, Balanced Core Performance Mode, Balanced Core Memory Performance Mode, and **Auto**.

DF Cstates

This setting controls the power-saving states of the data fabric. The options are Disabled, Enabled, and **Auto**.

Data Link Feature Cap

This setting controls the activation of advanced data link features for PCIe devices, which can improve link performance and reliability. The options are Enabled, Disabled, and **Auto**.

SEV-SNP Support

This setting controls the activation of Secure Encrypted Virtualization - Secure Nested Paging (SEV-SNP) security features. The options are Disabled, Enabled, and **Auto**.

Periodic Training Mode

This setting controls the method for managing power-saving states. The options are Disabled and **Legacy**.

EQ Bypass To Highest Rate

This setting determines whether the system can bypass equalization steps at lower data rates and directly attempt equalization at the highest supported rate during the link setup process. The options are Disable, Enable, and **Auto**.

CXL Memory Attribute

This setting determines the memory type for CXL devices. The options are **Auto**, Enabled, and Disabled.

Sync Header Bypass

This setting controls the inclusion of synchronization headers in data transmissions. The options are **Auto**, Enabled, and Disabled.

►xGMI Configuration

xGMI Force Link Width Control (available when xGMI Link Width Control is set to Manual)

This setting forces a specific link width for the xGMI interface, overriding automatic settings for manual control. The options are **Auto**, Unforce, and Force.

xGMI Link Max Speed

This setting controls the maximum speed of the xGMI link. The options are 20 Gbps, 25 Gbps, 32 Gbps, and **Auto**.

►Memory Configuration

Memory Target Speed

Use this setting to specify the memory target speed in MT/s. The options are **Auto**, DDR3600, DDR4000, DDR4400, DDR4800, and DDR5200.

Memory Interleaving

This setting controls fabric level memory interleaving. Note that the channel, die and socket have requirements on memory populations and it will be ignored if the memory doesn't support the selected option. The options are Disabled, Enabled, and **Auto**.

Chipselect Interleaving

This setting allows memory blocks to be interleaved across the DRAM chip selects for node 0, which can enhance memory performance. The options are Disabled and **Auto**.

BankSwapMode

This setting determines the operation of memory banks in relation to CPU usage. The options are **Auto**, Disabled, and Swap CPU.

Power Down Enable

Use this setting to enable or disable DDR power down mode. The options are Disabled, Enabled, and **Auto**.

DRAM Scrub Time

This setting specifies the frequency of memory scrubbing, which helps maintain data integrity by refreshing memory contents. The options are Disabled, 1 hour, 4 hours, 6 hours, 8 hours, 12 hours, 16 hours, **24 hours**, and 48 hours.

TSME

This setting controls the Transparent Secure Memory Encryption feature. The options are **Auto**, Enabled, and Disabled.

Enhanced PPR

Use this setting to enable a full memory test during system setup. While this thorough testing can enhance system stability, it will also increase the overall boot time. The options are **Disabled** and Enabled.

►CPU1 Memory Information

View memory information for CPU1.

►CPU2 Memory Information

View memory information for CPU2.

ACPI Settings Menu

►ACPI Settings

High Precision Event Timer

The High Precision Even Timber (HPET) is a hardware timer that provides high-resolution time stamps and periodic interrupts, used by the operating system for various timing-related tasks. The options are Disabled and **Enabled**.

PCI AER Support

This setting controls the Advanced Error Reporting (AER) capability for PCIe devices in the system. The options are Enabled and **Disabled**.

NUMA Nodes per Socket

A NUMA architecture divides hardware resources, including processors, memory, and I/O buses, into groups, called NUMA nodes. This setting specifies the number of desired NUMA nodes per sockets. Selecting Zero will attempt to interleave the two sockets together. **Auto** is equivalent to NPS1.

ACPI SRAT L3 Cache as NUMA Domain

Setting this to Enabled means each CCX in the system will be declared as a separate NUMA domain. Disabled means Memory addressing NUMA nodes per socket will be declared. The**Auto** setting equals Disabled.

Super IO Configuration Menu

►Super IO Configuration

The following information is displayed.

- Super IO Chip

Note: This submenu is available when your system supports this feature.

Select for Serial Port 1 or Serial Port 2.

Serial Port 1 Configuration Menu

►Serial Port 1 Configuration

Serial Port 1

Select Enabled to enable serial port 1. The options are Disabled and **Enabled**.

Device Settings (Available when "Serial Port 1" above is set to Enabled)

This feature displays the base I/O port address and the Interrupt Request address of serial port 1.

Change Settings (Available when "Serial Port 1" above is set to Enabled)

Use this feature to specify the base I/O port address and the Interrupt Request address of serial port 1. Select Auto for the BIOS to automatically assign the base I/O and IRQ address to serial port 1. The options are **Auto**, (IO=3F8h; IRQ=4;), (IO=3F8h; IRQ=3,4,5,6,7,9,10,11,12;), (IO=2F8h; IRQ=3,4,5,6,7,9,10,11,12;), (IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;), and (IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12;).

Serial Port 2 Configuration Menu

►Serial Port 2 Configuration

Note: It can be "Serial Port 2 Configuration" or "SOL Configuration" based on your system support.

Serial Port 2/SOL ("Serial Port 2" or "SOL" based on your system support)

Select Enabled to enable serial port 2 (or SOL). The options are Disabled and **Enabled**.

Device Settings (Available when "Serial Port 2/SOL" above is set to Enabled)

This feature displays the base I/O port address and the Interrupt Request address of serial port 2 (or SOL).

Change Settings (Available when "Serial Port 2/SOL" above is set to Enabled)

Use this feature to specify the base I/O port address and the Interrupt Request address of serial port 2 (or SOL). Select Auto for the BIOS to automatically assign the base I/O and IRQ address to serial port 2 (or SOL). The options are **Auto**, (IO=2F8h; IRQ=3;), (IO=3F8h; IRQ=3,4,5,6,7,9,10,11,12;), (IO=2F8h; IRQ=3,4,5,6,7,9,10,11,12;), (IO=3E8h; IRQ=3,4,5,6,7,9,10,11,12;), and (IO=2E8h; IRQ=3,4,5,6,7,9,10,11,12;).

Serial Port 2 Attribute (Available for Serial Port 2 only)

Select SOL to use serial port 2 as a Serial Over LAN (SOL) port for console redirection. The options are **SOL** and COM.

Serial Port Console Redirection Menu

►Serial Port Console Redirection

COM1 (Available when your system supports the serial port of COM1)

Console Redirection

Select Enabled to enable COM port 1 for Console Redirection, which allows a client machine to be connected to a host machine at a remote site for networking. The options are **Disabled** and Enabled.

Note: This feature will be set to Enabled if there is no BMC support.

SOL/COM2

Note: This feature is available when your system supports serial port of SOL and/or COM2. The "SOL/COM2" here indicates a shared serial port, and SOL is used as the default.

Console Redirection

Select Enabled to use the SOL/COM2 port for Console Redirection. The options are Disabled and **Enabled**.

►Console Redirection Settings

Note: This submenu is available when "Console Redirection" for COM1 or SOL/COM2 is set to Enabled.

Terminal Type

Use this feature to select the target terminal emulation type for Console Redirection. Select VT100 to use the ASCII Character set. Select VT100+ to add color and function key support. Select ANSI to use the Extended ASCII Character Set. Select VT-UTF8 to use UTF8 encoding to map Unicode characters into one or more bytes. The options are VT100, **VT100+**, VT-UTF8, and ANSI.

Bits Per Second

Use this feature to set the transmission speed for a serial port used in Console Redirection. Make sure that the same speed is used in the host computer and the client computer. A lower transmission speed may be required for long and busy lines. The options are 9600, 19200, 38400, 57600, and **115200** (bits per second).

Data Bits

Use this feature to set the data transmission size for Console Redirection. The options are 7 and **8** (bits).

Parity

A parity bit can be sent along with regular data bits to detect data transmission errors. Select Even if the parity bit is set to 0, and the number of 1's in data bits is even. Select Odd if the parity bit is set to 0, and the number of 1's in data bits is odd. Select None if you do not want to send a parity bit with your data bits in transmission. Select Mark to add a mark as a parity bit to be sent along with the data bits. Select Space to add a Space as a parity bit to be sent with your data bits. The options are **None**, Even, Odd, Mark, and Space.

Stop Bits

A stop bit indicates the end of a serial data packet. Select 1 Stop Bit for standard serial data communication. Select 2 Stop Bits if slower devices are used. The options are **1** and 2.

Flow Control

Use this feature to set the flow control for Console Redirection to prevent data loss caused by buffer overflow. Send a "Stop" signal to stop sending data when the receiving buffer is full. Send a "Start" signal to start sending data when the receiving buffer is empty. The options are **None** and Hardware RTS/CTS.

VT-UTF8 Combo Key Support

Select Enabled to enable VT-UTF8 Combination Key support for ANSI/VT100 terminals. The options are Disabled and **Enabled**.

Recorder Mode

Select Enabled to capture the data displayed on a terminal and send it as text messages to a remote server. The options are **Disabled** and Enabled.

Resolution 100x31

Select Enabled for extended-terminal resolution support. The options are Disabled and **Enabled**.

Putty KeyPad

This feature selects Function Keys and KeyPad settings for Putty, which is a terminal emulator designed for the Windows OS. The options are **VT100**, LINUX, XTERMR6, SCO, ESCN, and VT400.

Legacy Console Redirection

►Legacy Console Redirection Settings

Legacy Serial Redirection Port

Select a COM port to display redirection of legacy os and legacy oprom messages. . The options are **COM1**, and SOL/COM2.

Resolution

On legacy os, the number of rows and columns supported redirection. The options are 80x24, and **80x25**.

Redirection After BIOS Post

When bootloader is selected, then legacy console redirection is disabled before booting to legacy OS. When always is select, then legacy console redirection is enabled ofr legacy os.. The options are **Always Enable** and BootLoader.

Serial Port for Out-of-Band Management/Windows Emergency Management Services (EMS)

The feature allows you to configure Console Redirection settings to support Out-of-Band Serial Port management.

Console Redirection EMS

Select Enabled to use the SOL port for Console Redirection. The options are **Disabled** and Enabled.

►Console Redirection Settings

Note: This submenu is available when "Console Redirection EMS" is set to Enabled.

Out-of-Band Mgmt Port

The feature selects a serial port in a client server to be used by the Microsoft Windows Emergency Management Services (EMS) to communicate with a remote host server. The options are **COM1** and SOL/COM2. Please note that the option of SOL/COM2 indicates a shared serial port. SOL is available with BMC support.

Terminal Type EMS

Use this feature to select the target terminal emulation type for Console Redirection. Select VT100 to use the ASCII character set. Select VT100+ to add color and function key support. Select ANSI to use the extended ASCII character set. Select VT-UTF8 to use UTF8 encoding to map Unicode characters into one or more bytes. The options are VT100, VT100+, **VT-UTF8**, and ANSI.

Bits Per Second EMS

This feature sets the transmission speed for a serial port used in Console Redirection. Make sure that the same speed is used in the host computer and the client computer. A lower transmission speed may be required for long and busy lines. The options are 9600, 19200, 57600, and **115200** (bits per second).

Flow Control EMS

Use this feature to set the flow control for Console Redirection to prevent data loss caused by buffer overflow. Send a "Stop" signal to stop sending data when the receiving buffer is full. Send a "Start" signal to start sending data when the receiving buffer is empty. The options are **None**, Hardware RTS/CTS, and Software Xon/Xoff.

The following information is displayed.

- **Data Bits EMS**
- **Parity EMS**
- **Stop Bits EMS**

PCIe/PCI/PnP Configuration Menu

Above 4G Decoding

This setting enables 64-bit PCI device access to memory beyond 4 GB for improved memory utilization and performance. The options are Disabled and **Enabled**.

Re-Size BAR Support

This setting enables or disables the Re-Size Base Address Register feature for compatible PCIe devices, which allows the system to allocate more memory to the device. The options are Disabled and **Enabled**.

SR-IOV Support

This setting enables or disables Single Root I/O Virtualization support for the system's PCIe devices. The options are Disabled and **Enabled**.

BME DMA Mitigation

This setting enables or disables Bus Mastering Error (BME) Direct Memory Access (DMA) mitigation for protection during the pre-boot process. The options are **Disabled** and Enabled.

ASPM Support

Configure the Active State Power Management (ASPM) level for PCIe links to optimize power consumption and performance. The options are **Disabled**, Auto, and Force L1.

PCIe ARI Support

This setting enables alternative routing- ID interpretation. The options are **Enabled** and Disabled.

PCIe ARI Enumeration

This setting controls the forwarding of Alternate Routing-ID Interpretation (ARI) information for each downstream port, which is essential for device identification in PCIe systems. The options are Disabled, Enabled, and **Auto**.

Relaxed Ordering

This setting determines whether PCI Express devices are permitted to bypass strict transaction ordering, which can lead to potential performance improvements. The options are Disabled and **Enabled**.

Clock Spread Spectrum

This setting allows the BIOS to monitor and reduce the level of Electromagnetic Interference (EMI) generated by system components. The options are **Disabled** and Enabled.

No Snoop

This setting configures the No Snoop option for PCI Express devices, determining whether memory accesses bypass the cache. The options are Disabled and **Enabled**.

VGA Priority

This setting allows you to choose the primary video output source for the system. The options are **Onboard** and External.

PCIe Ten Bit Tag Support

This setting enables the use of ten-bit tags for PCIe devices, which can improve data handling and management. The options are Disabled, Enabled, and **Auto**.

NVMe Firmware Source

This setting determines the source of firmware for NVMe devices, allowing you to select between native support or vendor- specific firmware. The options are **Vendor Defined Firmware** and AMI Native Support.

PCI Devices Option ROM Setting

Onboard Video Option ROM

This setting selects the type of firmware to be loaded for onboard video. The options are Disabled and **EFI**.

M.2-C1 OPROM

This setting enables or disables the Option ROM for the M.2-C1 slot. The options are Disabled and **EFI**.

AOC-AG-i4 LAN1 OPROM

This setting enables or disables the onboard LAN OPROM option. The options are Disabled and **EFI**.

USB Configuration

USB Configuration

USB Module Version

USB Controllers: 3 XHCIs

USB Devices: 1 Keyboard, 1 Mouse, 1 Hub

XHCI Hand-off

This setting provides a workaround for operating systems that do not support XHCI hand-off. The XHCI ownership change must be claimed by the XHCI driver.The options are **Enabled** and Disabled.

Legacy USB Support

Select Enabled to support onboard legacy USB devices. Select Auto to disable legacy support if there are no legacy USB devices present. Select Disable to have all USB devices available for EFI applications only. The options are **Enabled**, Disabled and Auto.

Network Configuration Menu

Network Stack

This setting enables the UEFI nework stack. The options are Disabled and **Enabled**.

IPv4 PXE Support

This setting enables IPv4 PXE boot support. The options are Disabled and **Enabled**.

IPv4 HTTP Support

This setting enables IPv4 HTTP boot support. The options are Disabled and **Enabled**.

IPv6 PXE Support

This setting enables IPv6 PXE boot support. The options are Disabled and **Enabled**.

IPv6 HTTP Support

This setting enables IPv6 HTTP boot support. The options are Disabled and **Enabled**.

PXE Boot Wait Time

This sets the wait time, in seconds, to press the ESC key to abort the PXE boot. Use either =/- or numeric keys to set the value. The default value is **0**.

Media Detect Count

This sets the number of times the presence of media will be checked. Use either +/- or numeric keys to set the value. The default value is **1**.

►IPv6 Network Configuration

Set IPv6 Network parameters.

►Enter Configuration Menu

Interface Name

Interface Type

MAC address

Host addresses

Route Table

Gateway addresses

DNS adresses

Interface ID

DAD Transmit Count

The number of consecutive Neighbor Solicitation messages sent while performing Duplicate Address Detection on a tentative address. A value of zero indicates that Duplicate Address Detection is not performed. The default value is **1**.

►Advanced Configuration

New IPv6 address

Use this to set a new manual IP address. It can only be configured under manual policy.

New Gateway addresses

Use this to set new gateway addresses. Gateway IP addresses can only be configured under manual policy.

New DNS addresses

Use this to set new DNS addresses. DNS addresses can only be configured under manual policy.

Commit Changes and Exit

Discard Changes and Exit

Policy

The options are **Automatic** and Manual.

Save Changes and Exit

The options are **Yes** and No.

►IPv4 Network Configuration

Configured

This setting indicates whether the network address configured successfully. The options are Disabled and **Enabled**.

Enable DHCP

The options are **Disabled** and Enabled.

Local IP Address

Enter and IP address.

Local NetMask

Enter the Netmask address.

Local Gateway

Enter the Gateway IP address.

Local DNS Servers

Enter the DNS servers IP addresses.

Save Changes and Exit

The options are **Yes** and no.

SATA Configuration Menu

SATA Configuration

SATA Enable

Disable or enable the OnChip SATA controller. The options are Disabled, Enabled, or **Auto**.

SATA Information

Provides SATA devices information.

HTTP Boot Configuration Menu

►HTTP Boot Configuration

HTTP Boot Policy

Use this feature to set the HTTP boot policy. The options are Apply to all LANs, **Apply to each LAN**, and Boot Priority #1 instantly.

HTTP Boot Checks Hostname

Enable this feature for HTTPS boot to check the hostname of the TLS certificates to see if it matches the host name provided by the remote server. The options are **Enabled** and Disabled (WARNING: Security Risk!).



Warning! Disabling "HTTP Boot Checks Hostname" is a violation of RFC 6125 and may expose you to Man-in-the-Middle Attacks. Supermicro is not responsible for any and all security risks incurred by you disabling this feature.

Priority of HTTP Boot

Instance of Priority 1: (Available when your motherboard supports this feature)

This feature sets the rank target port. The default setting is **1**.

Select IPv4 or IPv6

This feature specifies which connection the target LAN port should boot from. The options are **IPv4** and IPv6.

Boot Description

Use this feature to enter a boot description, which cannot be longer than 75 characters. Please be sure to enter a boot description; otherwise, the boot option for the URI cannot be created.

Boot URI

Enter a Boot Uniform Research Identifier (URI) with 128 characters or shorter. This Boot URI determines how IPv4 Boot Option and IPv6 Boot Option will be created. This feature is only supported on Dual or EFI Boot Mode.

Instance of Priority 2: (Available when "HTTP Boot Policy" is set to Apply to each LAN or Boot Priority #1 instantly)

This feature sets the rank target port. The default setting is **0**.

Select IPv4 or IPv6 (Unavailable when "Instance of Priority x:" is set to 0)

This feature specifies which connection the target LAN port should boot from. The options are **IPv4** and IPv6.

Boot Description (Unavailable when "Instance of Priority x:" is set to 0

Use this feature to enter a boot description, which cannot be longer than 75 characters. Please be sure to enter a boot description; otherwise, the boot option for the URI cannot be created.

Boot URI (Unavailable when "Instance of Priority x:" is set to 0)

Enter a Boot URI with 128 characters or shorter. This Boot URI determines how IPv4 Boot Option and IPv6 Boot Option will be created. This feature is only supported on Dual or EFI Boot Mode.

Supermicro KMS Server Configuration Menu

►Supermicro KMS Server Configuration

Note: Be sure to configure all the features in the submenu of Supermicro KMS Server Configuration and the feature of "KMS Security Policy" in the submenu of Super-Guardians Configuration so that your system can communicate with the KMS server.

Supermicro KMS Server IP address

Use this feature to set the Supermicro Key Management Service (KMS) server IPv4 address in dotted-decimal notation.

Second Supermicro KMS Server IP address

Use this feature to set the second Supermicro KMS server IPv4 address in dotted-decimal notation.

Supermicro KMS TCP Port number

Use this feature to set the TCP port number used in Supermicro KMS Server. The valid range is 100–9999. The default setting is **5696**. Do not change the default setting unless a different TCP port number has been specified and used in the Supermicro KMS Server.

KMS Time Out

Use this feature to enter the KMS server connecting time-out (in seconds). The default setting is **5** (seconds).

TimeZone

Use this feature to set the correct time zone. The default setting is **0** (not specified).

Client UserName

Press <Enter> to set the client identity (UserName). The username can be between 0 and 63 characters in length.

Client Password

Press <Enter> to set the client identity (Password). The password can be between 0 and 31 characters in length.

►CA Certificate


This setting provides options for managing the Certificate Authority (CA) certificate.The options are **Update**, Delete, and Export.

►Client Certificate

This setting provides options for managing the client certificate.The options are **Update**, Delete, and Export.

►Client Private Key

Use the three features to enroll factory defaults or load the KMS Transport Layer Security (TLS) certificates, which are generated by the KMS Server, from the file stored in the USB flash drive as shown below.

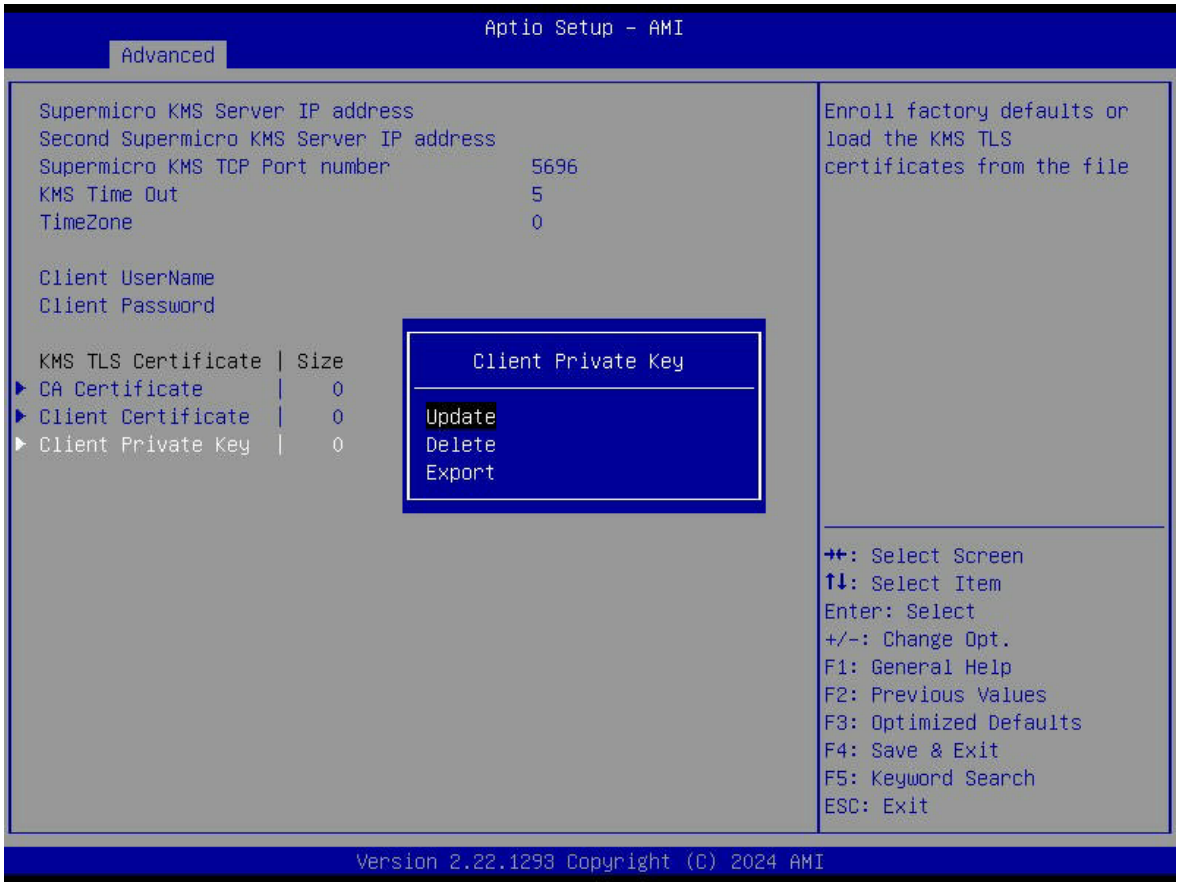

Private Key Password (Available when "Client Private Key" above has been set)

Use this feature to change the password for the client private key.

Super-Guardians Configuration Menu

►Super-Guardians Configuration

Super-Guardians Protection Policy

Use this feature to enable the Super-Guardians Protection Policy. The options are **Storage**, System, and System and Storage. Set this feature to Storage to protect and have secure access to Trusted Computing Group (TCG) NVMe devices with the Authentication-Key (AK). Set this feature to System to protect and have secure access to your system/motherboard with the AK. Set this feature to System and Storage to protect and have secure access to your system/motherboard/storage devices with the AK.

KMS Security Policy (Available when "TPM Security Policy" and "USB Security Policy" are set to Disabled)

Set this feature to Enabled to enable the KMS Security Policy. When this feature has not previously been set to Enabled, the options are **Disabled** and Enabled. Changes take effect after you save settings and reboot the system.

When this feature has previously been set to Enabled, the options are **Enabled**, Reset, and Key Rotation. Set this feature to Key Rotation to obtain an existing AK from the KMS server and create a new AK. To disable the KMS Security Policy, set this feature to Reset. When this feature is set to Reset, the system and TCG NVMe devices chosen in "Super-Guardians Protection Policy" will be in the unprotected mode.

Notes:

- Be sure that the KMS server is ready before configuring this feature.
- Use the professional KMS server solutions (e.g., Thales Server) or the Supermicro PyKMIP Software Package to establish the KMS server.

KMS Server Retry Count (Available when "TPM Security Policy" and "USB Security Policy" are set to Disabled)

Use this feature to specify how many times the system will attempt reconnecting to the KMS server. The valid range is 0–10. Press the <+> or <-> key on your keyboard to change the value. The default setting is **5**. If the value is 0, the system will retry infinitely.

TPM Security Policy (Available when "KMS Security Policy" and "USB Security Policy" are set to Disabled)

Set this feature to Enabled to enable the TPM Security Policy. When this feature has not previously been set to Enabled, the options are **Disabled** and Enabled. Changes take effect after you save settings and reboot the system.

When this feature has previously been set to Enabled, the options are **Enabled** and Reset. To disable the TPM Security Policy, set this feature to Reset. When this feature is set to reset, the system and TCG NVMe devices chosen in "Super-Guardians Protection Policy" will be in the unprotected mode.

Note: Be sure to install a TPM 2.0 device to your system before configuring this feature.

Load Authentication-Key (Available when "KMS Security Policy," "TPM Security Policy," and "USB Security Policy" are set to Disabled)

The options are **Disabled** and Enabled. Set this feature to Enabled. Changes take effect after you save settings and reboot the system. While booting, the BIOS will automatically load the Authentication-Key (filename: TPMAuth.bin) from the USB flash drive. Afterwards, the default setting will be set to Disabled by the BIOS.

Notes:

- Be sure to connect a USB flash drive with the Authentication-Key (filename: TPMAuth.bin) to your system before the system reboot.
- Be sure to save the Authentication-Key (filename: TPMAuth.bin) to the USB flash drive and have a backup. Please load the Authentication-Key (filename: TPMAuth.bin) after installing a TPM device. Otherwise, the TPM function can not work properly.

Save Authentication-Key (Available when "TPM Security Policy" is set to Enabled)

The options are **Disabled** and Enabled. Set this feature to Enabled. Changes take effect after you save settings and reboot the system. While booting, the BIOS will automatically save the Authentication-Key (filename: TPMAuth.bin) to the USB flash drive. Afterwards, the default setting will be set to Disabled by the BIOS.

Note: Be sure to connect a USB flash drive to your system before the system reboot.

USB Security Policy (Available when "KMS Security Policy" and "TPM Security Policy" are set to Disabled)

Use this feature to enable the USB Security Policy. The options are **Disabled** and Enabled. Set this feature to Enabled. Changes take effect after you save settings and reboot the system. Connect a USB flash drive to your system before the system reboot. While booting, the BIOS will automatically create the USB Authentication-Key (filename: USBAuth.bin) and save it to the USB flash drive.

When this feature has been previously set to Enabled, the options are **Enabled** and Reset. To disable the USB Security Policy, set this feature to Reset. When this feature is set to Reset, the system and TCG NVMe devices chosen in "Super-Guardians Protection Policy" will be in the unprotected mode.

Note: Be sure to connect a USB flash drive to your system before configuring this feature. Save the USB Authentication-Key (filename: USBAuth.bin) to the USB flash drive and keep a backup.

TLS Authenticate Configuration Menu

►Server CA Configuration

This feature allows you to configure the client certificate that is to be used by the server.

►Enroll Certification

This feature allows you to enroll the certificate in the system.

Certification GUID

Press <Enter> and input the certification Global Unique Identifier (GUID).

►Commit Changes and Exit

Use this feature to save all changes and exit TLS settings.

►Discard Changes and Exit

Use this feature to discard all changes and exit TLS settings.

►Delete Certification

This feature is used to remove the selected TLS certificates that are no longer needed or valid.

►Client Certification Configuration

Use this feature to manage the TLS certificates used to authenticate remote clients connecting to your system. Add, view, or delete client certificates as needed.

RAM Disk Configuration

Disk Memory Type

This setting specifies the type of memory to use from the available memory pool in the system to create a disk. the options are **Boot Service Data** and Reserved.

Create raw

Size (Hex):

Set the size of the RAM disk. The valid size should be multiples of the RAM disk block size.

Create & Exit or **Discard & Exit**.

Create from file

Created RAM disk list:

This displays a list of the created RAM disks.

Remove selected RAM disk(s)

8.4 BMC

Use this menu to configure Baseboard Management Console (BMC) settings.

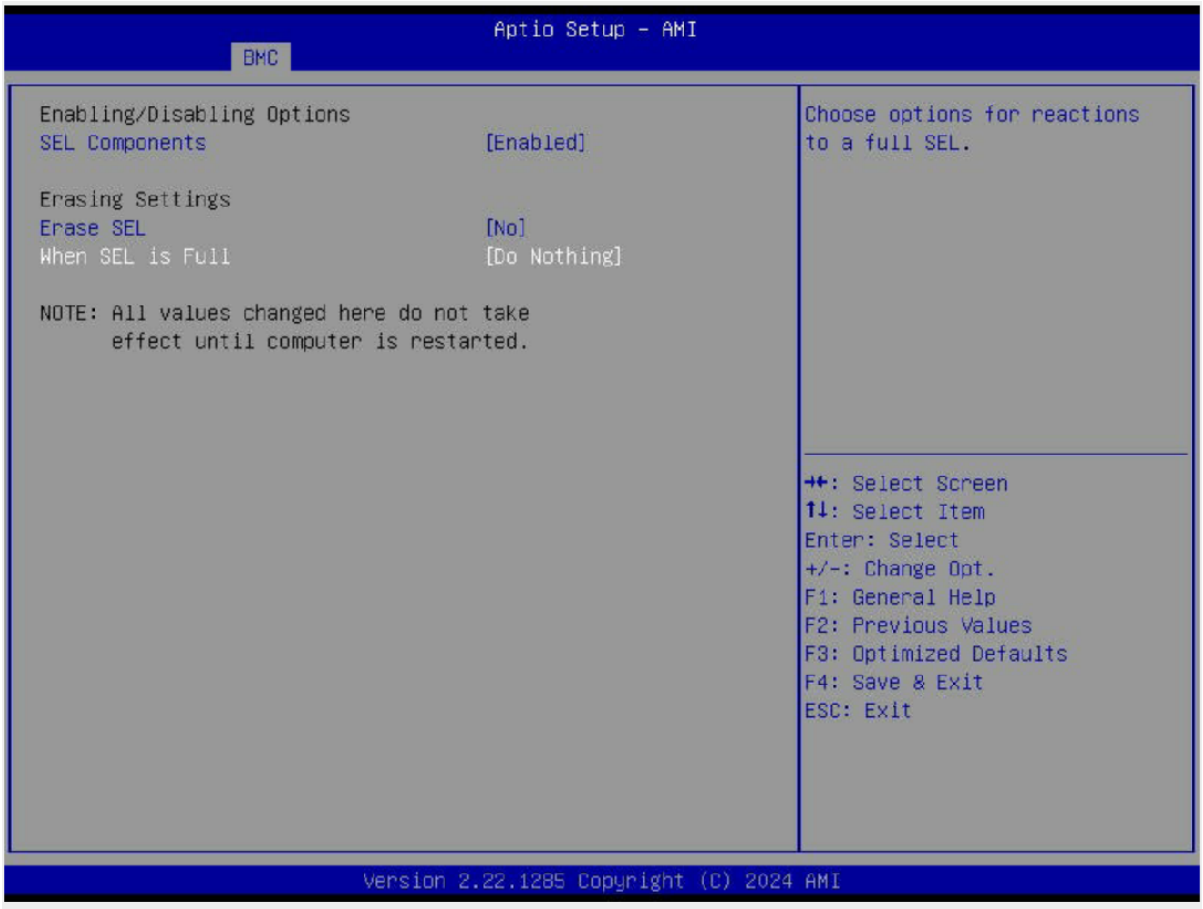


Figure 8-3. BMC Tab Screen

BMC Firmware Revision

This feature indicates the BMC firmware revision used in this system.

BMC STATUS

This feature indicates the status of the BMC firmware installed in this system.

System Event Log Menu

►System Event Log

Note: All values changed in this submenu do not take effect until computer is restarted.

SEL Components

This setting enables event logging for error or progress codes during boot. The options are Disabled or **Enabled**.

Erasing Settings

Erase SEL (Available when "SEL Components" is set to Enabled)

Select (Yes, On next reset) to erase all system event logs upon next system boot. Select (Yes, On every reset) to erase all system event logs upon each system reboot. Select No to keep all system event logs after each system reboot. The options are **No**, (Yes, On next reset), and (Yes, On every reset).

When SEL is Full (Available when "SEL Components" is set to Enabled)

This feature defines what the BIOS should do when the system event log is full. Select Erase Immediately to erase all events in the log when the system event log is full. The options are **Do Nothing** and Erase Immediately.

BMC Network Configuration Menu

►BMC Network Configuration

Update BMC LAN Configuration

Select Yes for the BIOS to implement all IP/MAC address changes upon next system boot. The options are **No** and Yes.

****

Configure IPv4 Support

****

BMC LAN Selection

This feature displays the type of the BMC LAN.

BMC Network Link Status:

This feature displays the status of the BMC network link for this system.

Configuration Address Source (Available when "Update BMC LAN Configuration" is set to Yes)

Use this feature to select the source of the IPv4 connection. If Static is selected, note the IP address of the IPv4 connection and enter it to the system manually in the field. If DHCP is selected, the BIOS will search for a Dynamic Host Configuration Protocol (DHCP) server in the network that is attached to and request the next available IP address for this computer. The options are Static and **DHCP**.

Station IP Address

This feature displays the Station IP address in decimal and in dotted quad form (i.e., 172.29.176.131). It is available for configuration when "Configuration Address Source" above is set to Static.

Subnet Mask

This feature displays the sub- network that this computer belongs to. It is available for configuration when "Configuration Address Source" above is set to Static.

Station MAC Address

This feature displays the Station MAC address for this computer. MAC addresses are six two-digit hexadecimal numbers.

Gateway IP Address

This feature displays the Gateway IP address for this computer. This should be in decimal and in dotted quad form (i.e., 172.29.0.1). It is available for configuration when "Configuration Address Source" above is set to Static.

****

Configure IPv6 Support

****

IPv6 Address Status

This feature displays the status of the IPv6 address.

IPv6 Support (Available when "Update BMC LAN Configuration" is set to Yes)

Use this feature to enable IPv6 support. The options are **Enabled** and Disabled.

Configuration Address Source (Available when "IPv6 Support" is set to Enabled)

Use this feature to select the source of the IPv6 connection. If Static Configuration is selected, note the IP address of IPv6 connection and enter it to the system manually in the field. If the other two options are selected, the BIOS will search for a DHCP server in the network that is attached to and request the next available IP address for this computer. The options are Static Configuration, **DHCPv6 Stateless**, and DHCPv6 Stateful.

IPv6 Address ("Static," "DHCPv6 Stateless," or "DHCPv6 Stateful," depending on the option you selected for "Configuration Address Source" above)

This feature displays the station IPv6 address.

Prefix Length

This feature displays the prefix length. It is available for configuration when "Configuration Address Source" above is set to Static Configuration.

Gateway IP

This feature displays the IPv6 gateway IP address. It is available for configuration when "Configuration Address Source" above is set to Static Configuration.

Advanced Settings (Available when "Configuration Address Source" is set to DHCPv6 Stateless)

Use this feature to set the DNS server IP. The default setting allows this system to obtain the DNS server IP automatically. The options are **Auto obtain DNS server IP** and Manually obtain DNS server IP.

Preferred DNS server IP (Available when "Advanced Settings" above is set to Manually obtain DNS server IP)

This feature displays the preferred DNS server IP. It can be configured via Redfish.

Alternative DNS server IP (Available when "Advanced Settings" above is set to Manually obtain DNS server IP)

This feature displays the alternative DNS server IP. It can be configured via Redfish.

****

Configure VLAN Support

****

VLAN Support (Available when "Update BMC LAN Configuration" is set to Yes)

Use this feature to enable the virtual LAN (VLAN) support. The options are Enabled and **Disabled**.

VLAN ID (Available when "VLAN Support" is set to Enabled)

Use this feature to create a new VLAN ID. The valid range is 1–4094. The default setting is **1**.

8.5 Event Logs

Use this menu to configure Event Logs settings.

Note: After you've made any changes in this section, please be sure to reboot the system for the changes to take effect.

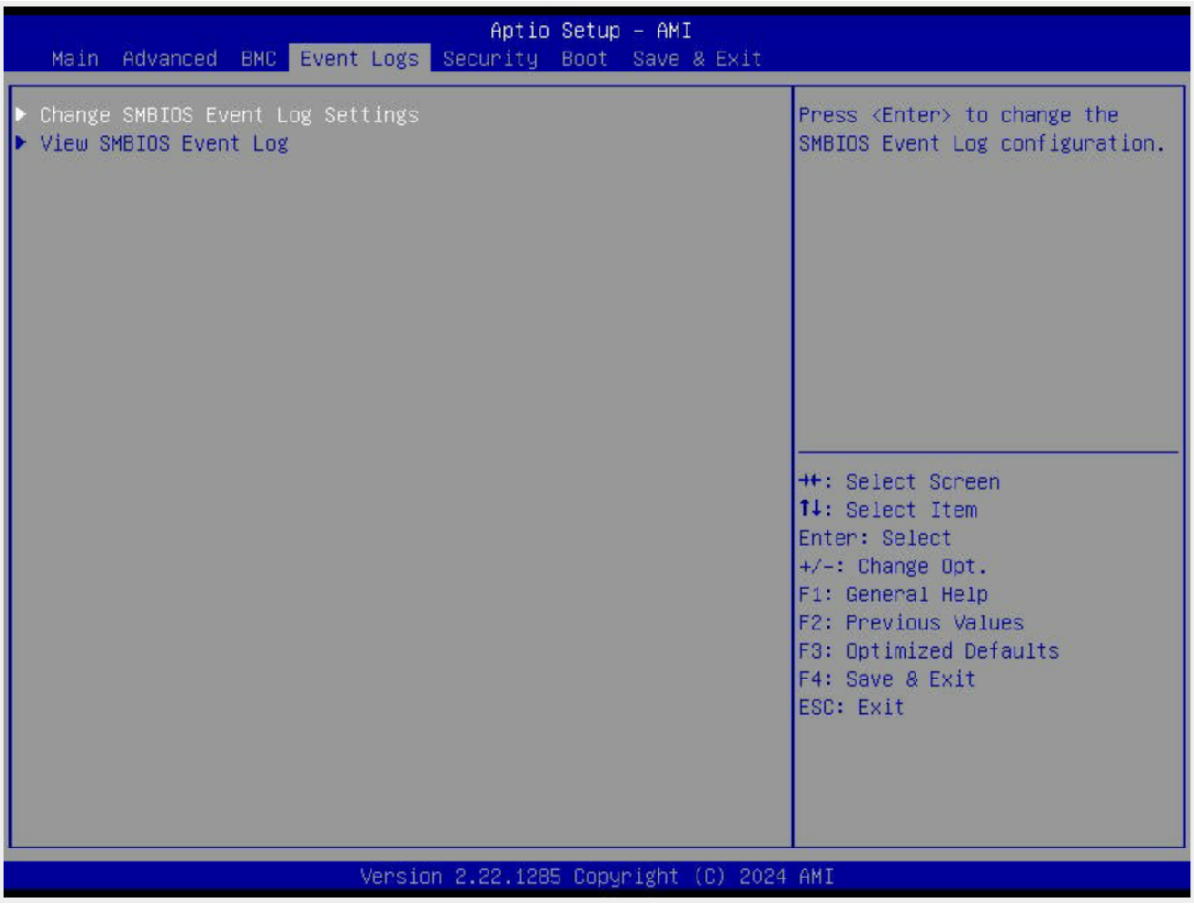


Figure 8-4. Event Logs Tab Screen

►Change SMBIOS Event Log Settings

Note: Reboot the system for the changes in this section to take effect.

Enabling/Disabling Options

SMBIOS Event Log

Select Enabled to enable System Management BIOS (SMBIOS) Event Logging during system boot. The options are Disabled and **Enabled**.

Erasing Settings

Erase Event Log (Available when "SMBIOS Event Log" is set to Enabled)

Select No to keep the event log without erasing it upon next system bootup. Select (Yes, Next reset) to erase the event log upon next system reboot. The options are **No**, (Yes, Next reset), and (Yes, Every reset).

When Log is Full (Available when "SMBIOS Event Log" is set to Enabled)

Select Erase Immediately to immediately erase all errors in the SMBIOS event log when the event log is full. Select Do Nothing for the system to do nothing when the SMBIOS event log is full. The options are **Do Nothing** and Erase Immediately.

SMBIOS Event Log Standard Settings

Log System Boot Event (Available when "SMBIOS Event Log" is set to Enabled)

Select Enabled to log system boot events. The options are Enabled and **Disabled**.

MECI (Available when "SMBIOS Event Log" is set to Enabled)

Enter the increment value for the multiple event counter. Enter a number between 1 and 255. The default setting is **1**. (MECI is the abbreviation for Multiple Event Count Increment.)

METW (Available when "SMBIOS Event Log" is set to Enabled)

Use this feature to determine how long (in minutes) should the multiple event counter wait before generating a new event log. Enter a number between 0 and 99. The default value is **60**. (METW is the abbreviation for Multiple Event Count Time Window.)

►View SMBIOS Event Log

Use this feature to view the event in the system event log. Select this feature and press <Enter> to view the status of an event in the log. The following information is displayed: DATE / TIME / ERROR CODE / SEVERITY.

8.6 Security

This menu allows you to configure the following security settings for the system.

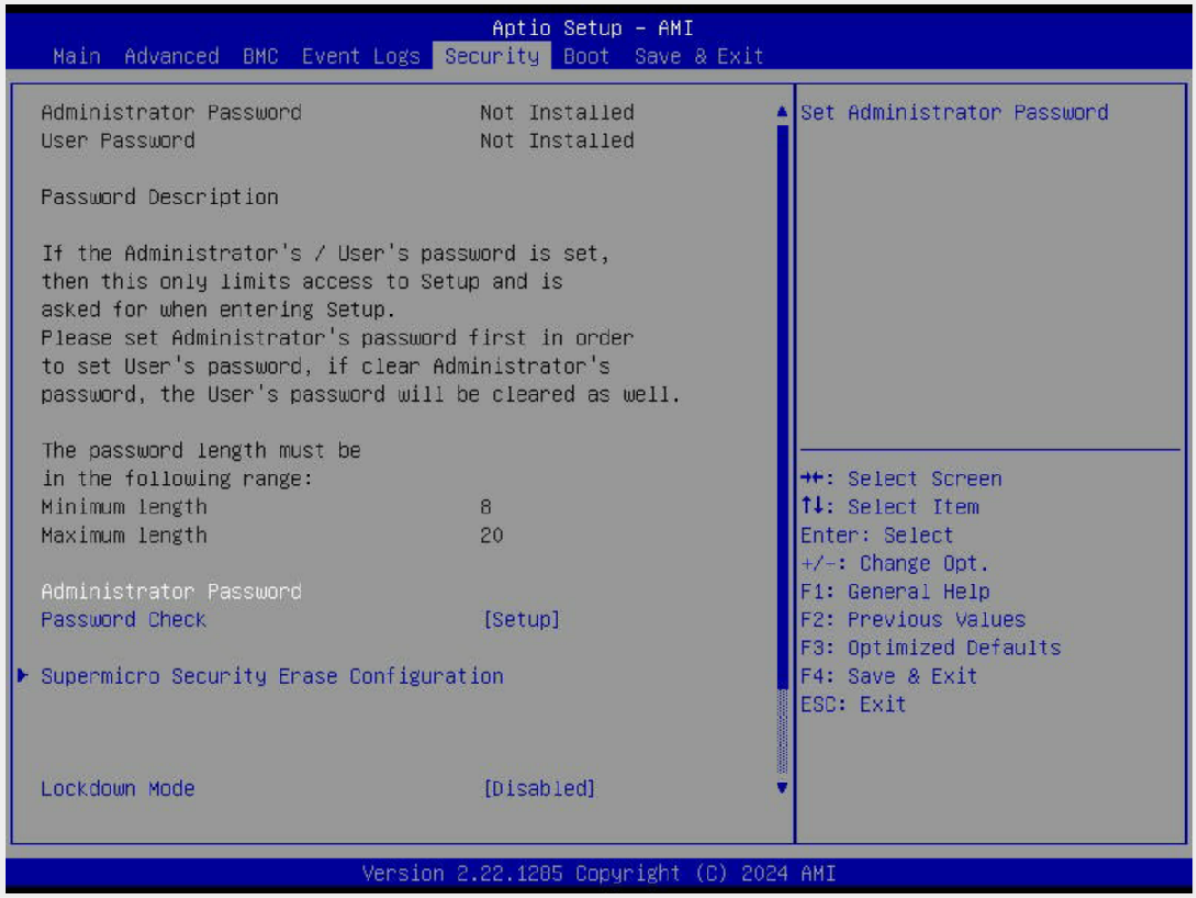


Figure 8-5. Security Tab Screen

Disable Block Sid and Freeze Lock (Available when your storage devices support TCG)

Select Enabled to allow SID authentication to be performed in TCG storage devices. The options are **Disabled** and Enabled.

The following information is displayed:

- Administrator Password
- User Password
- Password Description

Administrator Password

This feature indicates if an administrator password has been installed. Use this feature to set the administrator password, which is required to enter the BIOS Setup utility. The length of the password can be between three and 20 characters long.

User Password (Available when "Administrator Password" has been set)

This feature indicates if a user password has been installed. Use this feature to set the user password which is required to enter the BIOS Setup utility. The length of the password can be between three and 20 characters long.

Password Check

Select Setup for the system to check for a password upon entering the BIOS Setup utility. Select Always for the system to check for the passwords needed at bootup and upon entering the BIOS Setup utility. The options are **Setup** and Always.

Hard Drive Security Frozen

Select Enabled to freeze the Lock Security feature for HDD to protect key data in hard drives from being altered. The options are **Disabled** and Enabled.

Lockdown Mode (Available when the DCMS key is activated)

Select Enabled to support the Lockdown Mode, which prevents the existing data or keys stored in the system from being altered or changed in an effort to preserve system integrity and security. The options are **Disabled** and Enabled.

8.7 Boot

Use this menu to configure Boot settings.

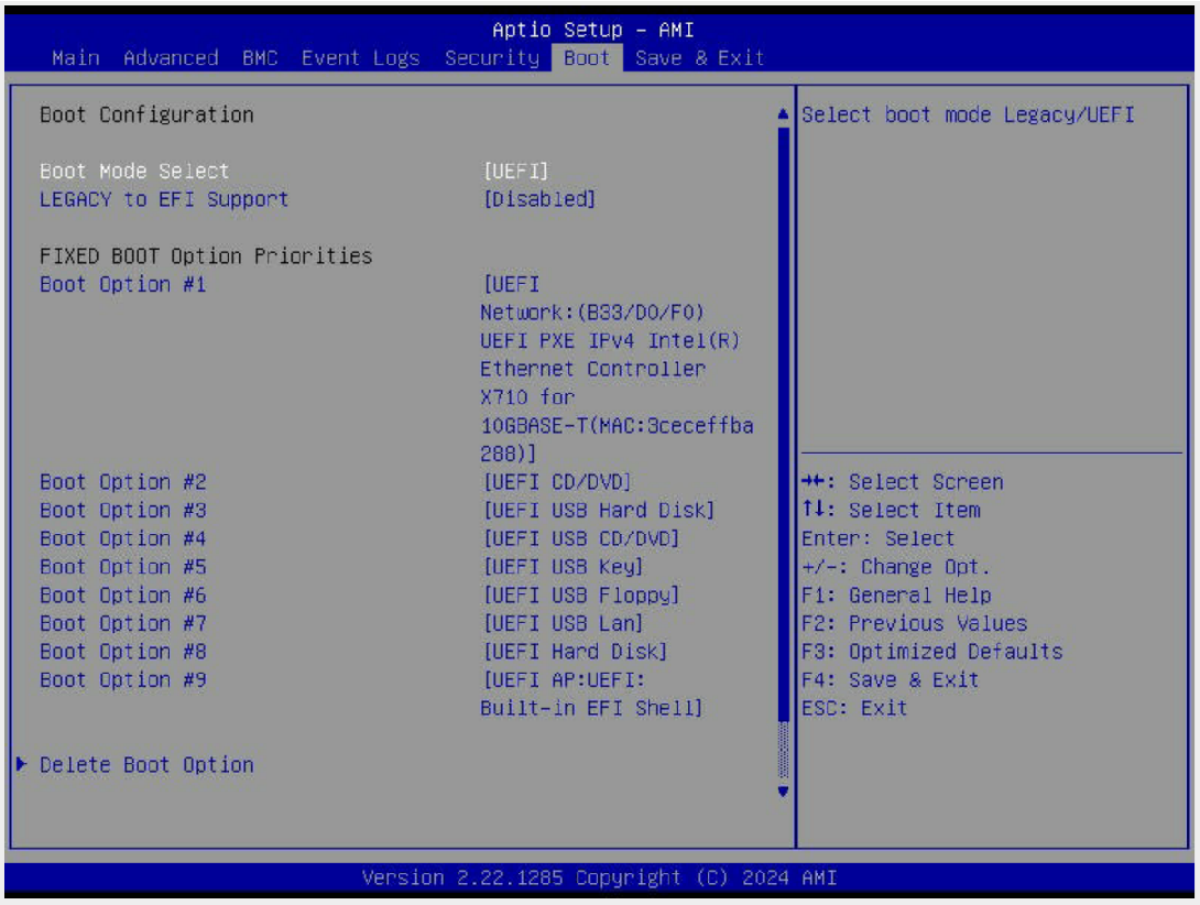


Figure 8-6. Boot Tab

Boot Configuration

Boot Mode Select

Use this feature to select boot mode. The options are Legacy, **UEFI**, and Dual.

Legacy to EFI Support

Use this feature to enable system to boot to EFI OS after boot failed from legacy boot order. The options are **Disabled** and Enabled.

Fixed Boot Order Priorities

Use this feature to prioritize the order of a bootable device from which the system will boot. Press <Enter> on each item sequentially to select the device.

- Boot Option #1 – Boot Option #9

►Add New Boot Option

Use this feature to add a new boot option to the boot priority features for system boot.

Note: This submenu is available when any storage device is detected by the BIOS.

Add boot option

Use this feature to specify the name for the new boot option.

Path for boot option

Use this feature to enter the path for the new boot option in the format fsx:\path\filename.efi.

Boot option File Path

Use this feature to specify the file path for the new boot option.

Create

After setting the name and the file path for the boot option, press <Enter> to create the new boot option in the boot priority list.

►Delete Boot Option

Use this feature to remove an EFI boot option from the boot order

Delete Boot Option

Use this feature to remove an EFI boot option from the boot priority list.

8.8 Save & Exit

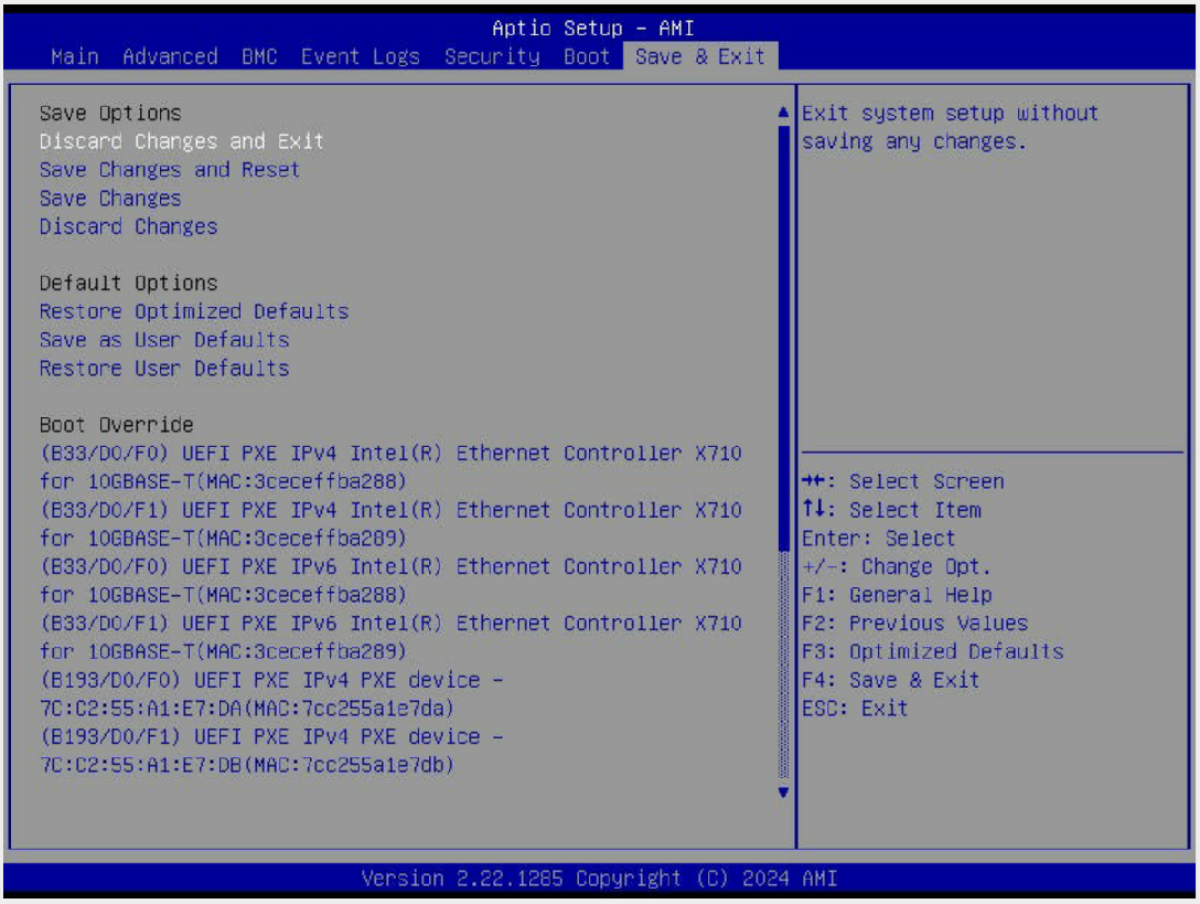


Figure 8-7. Save & Exit Tab

Save Options

Discard Changes and Exit

Use this feature to exit from the BIOS Setup utility without making any permanent changes to the system configuration and reboot the computer.

Save Changes and Reset

On completing the system configuration changes, use this feature to exit the BIOS Setup utility and reboot the computer for the new system configuration parameters to take effect.

Save Changes

On completing the system configuration changes, use this feature to save all changes made. This will not reset (reboot) the system.

Discard Changes

Select this feature and press <Enter> to discard all changes made and return to the BIOS Setup utility.

Default Options

Restore Optimized Defaults

Select this feature and press <Enter> to load manufacturer optimized default settings, which are intended for maximum system performance but not for maximum stability.

Note: After pressing <Enter>, reboot the system for the changes to take effect, which ensures that this system has the optimized default settings.

Save as User Defaults

Select this feature and press <Enter> to save all changes as the default values specified to the BIOS Setup utility for future use.

Restore User Defaults

Select this feature and press <Enter> to retrieve user-defined default settings that have been saved previously.

Boot Override

Note: Use this section to override the Boot priorities sequence in the Boot menu, and immediately boot the system with a device specified here instead of the one specified in the boot list. This is a one-time boot override.

Appendix A:

BIOS Codes

For information about BIOS codes for the AS -1116CS-TN server, refer to the following content.

BIOS Error POST (Beep) Codes

During the Power-On Self-Test (POST) routines, which are performed each time the system is powered on, errors may occur.

Non-fatal errors are those which, in most cases, allow the system to continue the boot up process. The error messages normally appear on the screen.

Fatal errors are those which will not allow the system to continue the boot up process. If a fatal error occurs, you should consult with your system manufacturer for possible repairs.

These fatal errors are usually communicated through a series of audible beeps that can be heard on an external buzzer connected to JD1. The table shown below lists some common errors and their corresponding beep codes encountered by users.

BIOS Beep (POST) Codes		
Beep Code	**Error Message**	**Description**
1 beep	Refresh	Circuits have been reset (Ready to power up)
5 short, 1 long	Memory error	No memory detected in system
5 short, 2 long	Display memory read/write error	Video adapter missing or with faulty memory
1 long continuous	System OH	System overheat condition

Additional BIOS POST Codes

The AMI BIOS supplies additional checkpoint codes, which are documented online at https://www.supermicro.com/support/manuals ("AMI BIOS POST Codes User's Guide").

For information on AMI updates, refer to https://www.ami.com/products.

Appendix B:

Standardized Warning Statements for AC Systems

The following statements are industry standard warnings, provided to warn the user of situations which have the potential for bodily injury. Should you have questions or experience difficulty, contact Supermicro's Technical Support department for assistance. Only certified technicians should attempt to install or configure components.

Read this section in its entirety before installing or configuring components in the Supermicro AS -1116CS-TN server.

These warnings may also be found on our website at the following page:

https://www.supermicro.com/about/policies/safety_information.cfm

Warning Definition



Warning! This warning symbol means danger. You are in a situation that could cause bodily injury. Before you work on any equipment, be aware of the hazards involved with electrical circuitry and be familiar with standard practices for preventing accidents.

この警告サインは危険を意味します。

人身事故につながる可能性がありますので、いずれの機器でも動作させる前に、

電気回路に含まれる危険性に注意して、標準的な事故防止策に精通して下さい。

此警告符号代表危险。

您正处于可能受到严重伤害的工作环境中。在您使用设备开始工作之前、必须充分意识到触电的危险、并熟练掌握防止事故发生的标准工作程序。请根据每项警告结尾的声明号码找到此设备的安全性警告说明的翻译文本。

此警告符號代表危險。

您正處於可能身體可能會受損傷的工作環境中。在您使用任何設備之前、請注意觸電的危險、並且要熟悉預防事故發生的標準工作程序。請依照每一注意事項後的號碼找到相關的翻譯說明內容。

WICHTIGE SICHERHEITSHINWEISE

Dieses Warnsymbol bedeutet Gefahr. Sie befinden sich in einer Situation, die zu Verletzungen führen kann. Machen Sie sich vor der Arbeit mit Geräten mit den Gefahren elektrischer Schaltungen und den üblichen Verfahren zur Vorbeugung vor Unfällen vertraut. Suchen Sie mit der am Ende jeder Warnung angegebenen Anweisungsnummer nach der jeweiligen Übersetzung in den übersetzten Sicherheitshinweisen, die zusammen mit diesem Gerät ausgeliefert wurden.

BEWAHREN SIE DIESE HINWEISE GUT AUF.

INSTRUCCIONES IMPORTANTES DE SEGURIDAD

Este símbolo de aviso indica peligro. Existe riesgo para su integridad física. Antes de manipular cualquier equipo, considere los riesgos de la corriente eléctrica y familiarícese con los procedimientos estándar de prevención de accidentes. Al final de cada advertencia encontrará el número que le ayudará a encontrar el texto traducido en el apartado de traducciones que acompaña a este dispositivo.

GUARDE ESTAS INSTRUCCIONES.

IMPORTANTES INFORMATIONS DE SÉCURITÉ

Ce symbole d'avertissement indique un danger. Vous vous trouvez dans une situation pouvant entraîner des blessures ou des dommages corporels. Avant de travailler sur un équipement, soyez conscient des dangers liés aux circuits électriques et familiarisez-vous avec les procédures couramment utilisées pour éviter les accidents. Pour prendre connaissance des traductions des avertissements figurant dans les consignes de sécurité traduites qui accompagnent cet appareil, référez-vous au numéro de l'instruction situé à la fin de chaque avertissement.

CONSERVEZ CES INFORMATIONS.

תקנון הצהרות אזהרה

הצהרות הבאות הן אזהרות על פי תקני התעשייה, על מנת להזהיר את המשתמש מפני חבלה

פיזית אפשרית. במידה ויש שאלות או היתקלות בבעיה כלשהי, יש ליצור קשר עם מחלקת תמיכה

טכנית של סופרמיקרו. טכנאים מוסמכים בלבד רשאים להתקין או להגדיר את הרכיבים.

יש לקרוא את הנספח במלואו לפני התקנת או הגדרת הרכיבים במארזי סופרמיקרו.

ا كً ف حالة وٌكي أى تتسبب ف اصابة جسذ ةٌ هذا الز هز عٌ خطز !تحذ زٌ.

قبل أى تعول على أي هعذات،كي على علن بالوخاطز ال اجٌّوة عي الذوائز

الكهزبائ ةٍ

وكي على درا ةٌ بالووارسات النقائ ةٍ لو عٌ وقنع أي حادث

استخذم رقن الب إى الو صٌنص ف هًا ةٌ كل تحذ زٌ للعثٌر تزجوتها

안전을 위한 주의사항

이 경고 기호는 위험이 있음을 알려 줍니다. 작업자의 신체에 부상을 야기 할 수 있는 상태에 있게 됩니다. 모든 장비에 대한 작업을 수행하기 전에 전기회로와 관련된 위험요소들을 확인하시고 사전에 사고를 방지할 수 있도록 표준 작업절차를 준수해 주시기 바랍니다.

해당 번역문을 찾기 위해 각 경고의 마지막 부분에 제공된 경고문 번호를 참조하십시오

BELANGRIJKE VEILIGHEIDSINSTRUCTIES

Dit waarschuwings symbool betekent gevaar. U verkeert in een situatie die lichamelijk letsel kan veroorzaken. Voordat u aan enige apparatuur gaat werken, dient u zich bewust te zijn van de bij een elektrische installatie betrokken risico's en dient u op de hoogte te zijn van de standaard procedures om ongelukken te voorkomen. Gebruik de nummers aan het eind van elke waarschuwing om deze te herleiden naar de desbetreffende locatie.

BEWAAR DEZE INSTRUCTIES

Installation Instructions

Warning! Read the installation instructions before connecting the system to the power source.

警告!

システムを電源に接続する前に、設置手順書をお読み下さい。

警告!

将此系统连接电源前、请先阅读安装说明。

警告!

將系統與電源連接前、請先閱讀安裝說明。

Warnung!

Vor dem Anschließen des Systems an die Stromquelle die Installationsanweisungen lesen.

¡Advertencia!

Lea las instrucciones de instalación antes de conectar el sistema a la red de alimentación.

Attention!

Avant de brancher le système sur la source d'alimentation, consulter les directives d'installation.

אַזהָרָה!

יש לקרוא את הוראות התקנה לפני חיבור המערכת למקור מתח.

تحذير!

اقر إرشادات التركيب قبل توصيل النظام إلى مصدر للطاقة

경고!

시스템을 전원에 연결하기 전에 설치 안내를 읽어주십시오.

Waarschuwing!

Raadpleeg de installatie-instructies voordat u het systeem op de voedingsbron aansluit.

Circuit Breaker



Warning! This product relies on the building's installation for short-circuit (overcurrent) protection. Ensure that the protective device is rated not greater than: 250 V, 20 A.

警告!

この製品は、短絡(過電流)保護装置がある建物での設置を前提としています。

保護装置の定格が250 V、20 Aを超えないことを確認下さい。

警告!

此产品的短路(过载电流)保护由建筑物的供电系统提供,确保短路保护设备的额定电流不大于 250 V、20 A。

警告!

此產品的短路(過載電流)保護由建築物的供電系統提供,確保短路保護設備的額定電流不大於 250 V、20 A。

Warnung!

Dieses Produkt ist darauf angewiesen, dass im Gebäude ein Kurzschluss bzw. Überstromschutz installiert ist. Stellen Sie sicher, dass der Nennwert der Schutzvorrichtung nicht mehr als: 250 V, 20 A beträgt.

¡Advertencia!

Este equipo utiliza el sistema de protección contra cortocircuitos (o sobrecorrientes) del edificio. Asegúrese de que el dispositivo de protección no sea superior a: 250 V, 20 A.

Attention!

Pour ce qui est de la protection contre les courts-circuits (surtension), ce produit dépend de l'installation électrique du local. Vérifiez que le courant nominal du dispositif de protection n'est pas supérieur à :250 V, 20 A.

אזהרה!

מוצר זה מסתמך על הגנה המותקנת במבנים למניעת קצר חשמלי. יש לוודא כי

המכשיר המגן מפני הקצר החשמלי הוא לא יותר מ-250 V, 20 A

!تحذير

هذا المنتج يعتمد على معداث الحمايت مه الدوائر القصيرة التي تم تثبيتها في

المبنى

تأكد من أن تقييم الجهاز الوقائي ليس أكثر من : 20 A, 250 V

경고!

이 제품은 전원의 단락(과전류)방지에 대해서 전적으로 건물의 관련 설비에 의존합니다. 보호장치의 정격이 반드시 250 V(볼트), 20 A(암페어)를 초과하지 않도록 해야 합니다.

Waarschuwing!

Dit product is afhankelijk van de kortsluitbeveiliging (overspanning) van uw electrische installatie. Controleer of het beveiligde aparaat niet groter gedimensioneerd is dan 250 V, 20 A.

Power Disconnection Warning



Warning! The system must be disconnected from all sources of power and the power cord removed from the power supply module(s) before accessing the chassis interior to install or remove system components (except for hot-swap components).

警告!

システムコンポーネントの取り付けまたは取り外しのために、シャーシー内部にアクセスするには、

システムの電源はすべてのソースから切断され、電源コードは電源モジュールから取り外す必要があります。

警告!

在你打开机箱并安装或移除内部器件前、必须将系统完全断电、并移除电源线。

警告!

在您打開機殼安裝或移除內部元件前、必須將系統完全斷電、並移除電源線。

Warnung!

Das System muss von allen Quellen der Energie und vom Netzanschlusskabel getrennt sein, das von den Spg.Versorgungsteilmodulen entfernt wird, bevor es auf den Chassisinnenraum zurückgreift, um Systemsbestandteile anzubringen oder zu entfernen.

¡Advertencia!

El sistema debe ser disconnected de todas las fuentes de energía y del cable eléctrico quitado de los módulos de fuente de alimentación antes de tener acceso el interior del chasis para instalar o para quitar componentes de sistema.

Attention!

Le système doit être débranché de toutes les sources de puissance ainsi que de son cordon d'alimentation secteur avant d'accéder à l'intérieur du chassis pour installer ou enlever des composants de systéme.

אזהרה!

יש לנתק את המערכת מכל מקורות החשמל ויש להסיר את כבל החשמלי מהספק

לפני גישה לחלק הפנימי של המארז לצורך התקנת או הסרת רכיבים.

!تحذير

يجب فصم انتظاو من جميع مصادر انطاقت وإزانت سهك انكهرباء من وحدة امداد

انطاقت قبم

انصسل إنى انمناطق انداخهيت نههيكم نتثبيج أو إزانت مكنناث الجهاز

경고!

시스템에 부품들을 장착하거나 제거하기 위해서는 섀시 내부에 접근하기 전에 반드시 전원 공급장치로부터 연결되어있는 모든 전원과 전기코드를 분리해주어야 합니다.

Waarschuwing!

Voordat u toegang neemt tot het binnenwerk van de behuizing voor het installeren of verwijderen van systeem onderdelen, dient u alle spanningsbronnen en alle stroomkabels aangesloten op de voeding(en) van de behuizing te verwijderen

Equipment Installation



Warning! Only authorized personnel and qualified service persons should be allowed to install, replace, or service this equipment.

警告!

トレーニングを受け認定された人だけがこの装置の設置、交換、またはサービスを許可されています。

警告!

只有经过培训且具有资格的人员才能进行此设备的安装、更换和维修。

警告!

只有經過受訓且具資格人員才可安裝、更換與維修此設備。

Warnung!

Nur autorisiertes Personal und qualifizierte Servicetechniker dürfen dieses Gerät installieren, austauschen oder warten.

¡Advertencia!

Sólo el personal autorizado y el personal de servicio calificado deben poder instalar, reemplazar o dar servicio a este equipo.

Attention!

Seul le personnel autorisé et le personnel de maintenance qualifié doivent être autorisés à installer, remplacer ou entretenir cet équipement.

אזהרה!

יש לאפשר רק צוות מורשה ואנשי שירות מוסמכים להתקין, להחליף או לטפל בציוד זה.

تحذير!

ينبغي السماح فقط للموظفين المعتمدين وأفراد الخدمة المؤهلين بتركيب هذا الجهاز أو استبداله أو صيانته.

경고!

승인된 직원과 자격을 갖춘 서비스 담당자만이 이 장비를 설치, 교체 또는 서비스할 수 있습니다.

Waarschuwing!

Alleen geautoriseerd personeel en gekwalificeerd onderhoudspersoneel mag deze apparatuur installeren, vervangen of onderhouden.

Rack Stability Hazard

Warning! Stability hazard. The rack may tip over causing serious personal injury. Before extending the rack to the installation position, read the installation instructions. Do not put any load on the slide-rail mounted equipment in the installation position. Do not leave the slide-rail mounted equipment in the installation position.

警告!

安定性に危険があります。ラックが転倒して、重大な人身事故を引き起こす可能性があります。ラックを設置位置まで伸ばす前に、設置手順をお読みください。設置位置にあるスライドレールに取り付けられた機器に負荷をかけないでください。スライドレールに取り付けられた機器を設置位置に放置しないでください。

警告!

稳定性危险。机架可能会翻倒、造成严重的人身伤害。在将机架延伸到安装位置之前、请阅读安装说明。请勿在安装位置对滑轨安装的设备施加任何负载。请勿将滑轨安装的设备留在安装位置。

警告!

穩定性危險。機架可能會翻倒、造成嚴重的人身傷害。將機架延伸至安裝位置前、請先閱讀安裝說明。請勿在安裝位置的滑軌安裝設備上放置任何負載。請勿將滑軌安裝設備留在安裝位置。

Warnung!

Gefahr der Instabilität. Das Rack kann umkippen und schwere Verletzungen verursachen. Lesen Sie die Installationsanweisungen, bevor Sie das Rack in die Einbauposition ausfahren. Belasten Sie die auf den Gleitschienen montierten Geräte nicht in der Einbauposition. Lassen Sie die auf den Gleitschienen montierten Geräte nicht in der Einbauposition.

¡Advertencia!

Peligro de inestabilidad. El rack podría volcarse y causar lesiones personales graves. Antes de extender el rack a la posición de instalación, lea las instrucciones de instalación. No coloque ninguna carga sobre el equipo montado sobre rieles deslizantes en la posición de instalación. No deje el equipo montado sobre rieles deslizantes en la posición de instalación.

Attention!

Danger d’instabilité. Le rack peut basculer et provoquer des blessures corporelles graves. Avant d’étendre le rack en position d’installation, lire les instructions d’installation. Ne pas charger l’équipement monté sur rail de glissière en position d’installation. Ne pas laisser l’équipement monté sur rail de glissière en position d’installation.

אזהרה!

סכנת חוסר יציבות

המתלה עלול להתהפך ולגרום לפציעה חמורה

לפני הארכת המתלה למצב ההתקנה, קרא את הוראות ההתקנה

אין להעמיס כל עומס על הציוד המותקן על מסילת ההחלקה במצב ההתקנה

אל תשאיר את הציוד המותקן על מסילת ההחלקה במצב ההתקנה

تحذير!

خطر عدم الاستقرار.

قد ينقلب الرف مسبباً إصابات جسدية خطيرة.

قبل تمديد الرف إلى موضع التركيب، اقرأ تعليمات التركيب.

لا تضع أي حمولة على الجهاز المثبت على سكة الانزلاق في موضع التركيب.

لا تترك الجهاز المثبت على سكة الانزلاق في موضع التركيب.

경고!

안정성 위험. 랙이 넘어져 심각한 개인 부상을 입을 수 있습니다. 랙을 설치 위치까지 확장하기 전에 설치 지침을 읽으십시오. 설치 위치에서 슬라이드 레일 장착 장비에 하중을 가하지 마십시오. 슬라이드 레일 장착 장비를 설치 위치에 두지 마십시오.

Waarschuwing!

Gevaar voor instabiliteit. Het rek kan kantelen en ernstig persoonlijk letsel veroorzaken. Lees de installatie-instructies voordat u het rek uitschuift naar de installatiepositie. Plaats geen last op de op de glijrail gemonteerde apparatuur in de installatiepositie. Laat de op de glijrail gemonteerde apparatuur niet in de installatiepositie staan.

Restricted Area

Warning! This unit is intended for installation in restricted access areas. A restricted access area can be accessed only through the use of a special tool, lock and key, or other means of security. (This warning does not apply to workstations).

警告!

このユニットは、アクセス制限区域に設置されることを想定しています。

アクセス制限区域は、特別なツール、鍵と錠前、その他のセキュリティの手段を用いてのみ出入りが可能です。

警告!

此部件应安装在限制进出的场所、限制进出的场所指只能通过使用特殊工具、锁和钥匙或其它安全手段进出的场所。

警告!

此裝置僅限安裝於進出管制區域、進出管制區域係指僅能以特殊工具、鎖頭及鑰匙或其他安全方式才能進入的區域。

Warnung!

Diese Einheit ist zur Installation in Bereichen mit beschränktem Zutritt vorgesehen. Der Zutritt zu derartigen Bereichen ist nur mit einem Spezialwerkzeug, Schloss und Schlüssel oder einer sonstigen Sicherheitsvorkehrung möglich.

¡Advertencia!

Esta unidad ha sido diseñada para instalación en áreas de acceso restringido. Sólo puede obtenerse acceso a una de estas áreas mediante la utilización de una herramienta especial, cerradura con llave u otro medio de seguridad.

Attention!

Cet appareil doit être installée dans des zones d'accès réservés. L'accès à une zone d'accès réservé n'est possible qu'en utilisant un outil spécial, un mécanisme de verrouillage et une clé, ou tout autre moyen de sécurité.

אזהרה!

יש להתקין את היחידה באזורים שיש בהם הגבלת גישה. הגישה ניתנת בעזרת

'כלי אבטחה בלבד (מפתח, מנעול וכד.)

!تحذير

اتخصيص هذه انحذة نترك بُها ف مناطق محظورة تم .

مَكن انصل إن منطقت محظورة فقط من خلال استخذاو أداة خاصت،

أو أ وس هُت أخري نلاأمما قفم ومفتاح

경고!

이 장치는 접근이 제한된 구역에 설치하도록 되어있습니다. 특수도구, 잠금 장치 및 키, 또는 기타 보안 수단을 통해서만 접근 제한 구역에 들어갈 수 있습니다.

Waarschuwing!

Dit apparaat is bedoeld voor installatie in gebieden met een beperkte toegang. Toegang tot dergelijke gebieden kunnen alleen verkregen worden door gebruik te maken van speciaal gereedschap, slot en sleutel of andere veiligheidsmaatregelen.

Battery Handling



CAUTION There is risk of explosion if the battery is replaced by an incorrect type. Replace the battery only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

警告!

バッテリーを間違ったタイプに交換すると爆発の危険があります。交換する電池はメーカーが推奨する型、または同等のものを使用下さい。使用済電池は製造元の指示に従って処分して下さい。

警告!

如果更换的电池类型不正确。请只使用同类电池或制造商推荐的功能相当的电池更换原有电池。请按制造商的说明处理废旧电池。

警告!

如果更換的電池類型不正確。請使用製造商建議之相同或功能相當的電池更換原有電池。請按照製造商的說明指示處理廢棄舊電池。

WARNUNG!

Es besteht Explosionsgefahr, wenn die Batterie durch einen falschen Typ ersetzt wird. Ersetzen Sie die Batterie nur durch den gleichen oder vom Hersteller empfohlenen Batterietyp. Entsorgen Sie die benutzten Batterien nach den Anweisungen des Herstellers.

¡ADVERTENCIA!

Existe riesgo de explosión si la batería se reemplaza por un tipo incorrecto. Reemplazar la batería exclusivamente con el mismo tipo o el equivalente recomendado por el fabricante. Desechar las baterías gastadas según las instrucciones del fabricante.

ATTENTION!

Il existe un risque d'explosion si la batterie est remplacée par un type incorrect. Ne la remplacer que par une pile de type semblable ou équivalent, recommandée par le fabricant. Jeter les piles usagées conformément aux instructions du fabricant.

אזהרה!

קיימת סכנת פיצוץ אם הסוללה תוחלף בסוג שגוי. יש להחליף

את הסוללה בסוג התואם מחברת יצרן מומלצת.

סילוק הסוללות המשומשות יש לבצע לפי הוראות היצרן.

!تحذير

.هناك خطر الانفجار إذا تم استبدال البطارية بنوع غير صحيح

اسحبذال البطارية

فقط بنفس النمع أو ما يعادلها مما أوصث به الشرمة المصنعة

جخلص من البطاريات المسحعملة وفقا لحعليمات الشرمة الصانعة

경고!

배터리를 잘못된 종류로 교체하면 폭발의 위험이 있습니다. 기존 배터리와 동일하거나 제조사에서 권장하는 동등한 종류의 배터리로만 교체해야 합니다. 제조사의 안내에 따라 사용된 배터리를 처리하여 주십시오.

WAARSCHUWING!

Er bestaat explosiegevaar als de batterij wordt vervangen door een verkeerd type. Vervang de batterij slechts met hetzelfde of een equivalent type die door de fabrikant aanbevolen wordt. Gebruikte batterijen dienen overeenkomstig fabrieksvoorschriften afgevoerd te worden.

Redundant Power Supplies



Warning! This unit might have more than one power supply connection. All connections must be removed to de-energize the unit.

警告!

このユニットは複数の電源装置が接続されている場合があります。

ユニットの電源を切るためには、すべての接続を取り外さなければなりません。

警告!

此部件连接的电源可能不止一个、必须将所有电源断开才能停止给该部件供电。

警告!

此裝置連接的電源可能不只一個、必須切斷所有電源才能停止對該裝置的供電。

Warnung!

Dieses Gerät kann mehr als eine Stromzufuhr haben. Um sicherzustellen, dass der Einheit kein trom zugeführt wird, müssen alle Verbindungen entfernt werden.

¡Advertencia!

Puede que esta unidad tenga más de una conexión para fuentes de alimentación. Para cortar por completo el suministro de energía, deben desconectarse todas las conexiones.

Attention!

Cette unité peut avoir plus d'une connexion d'alimentation. Pour supprimer toute tension et tout courant électrique de l'unité, toutes les connexions d'alimentation doivent être débranchées.

אזהרה!

ליחדה יש יותר מחיבור אחד של ספק. יש להסיר את כל החיבורים על מנת לרוקן

את היחידה.

تحذير!

قد يكون لهذا الجهاز عدة اتصالات بوحدات امداد الطاقة .

يجب إزالة كافة الاتصالات لعسل الوحدة عن الكهرباء

경고!

이 장치에는 한 개 이상의 전원 공급 단자가 연결되어 있을 수 있습니다. 이 장치에 전원을 차단하기 위해서는 모든 연결 단자를 제거해야만 합니다.

Waarschuwing!

Deze eenheid kan meer dan één stroomtoevoeraansluiting bevatten. Alle aansluitingen dienen verwijderd te worden om het apparaat stroomloos te maken.

Backplane Voltage



Warning! Hazardous voltage or energy is present on the backplane when the system is operating. Use caution when servicing.

警告!

システムの稼働中は危険な電圧または電力が、バックプレーン上にかかっています。

修理する際には注意ください。

警告!

当系统正在进行时、背板上有很危险的电压或能量、进行维修时务必小心。

警告!

當系統正在進行時、背板上有危險的電壓或能量、進行維修時務必小心。

Warnung!

Wenn das System in Betrieb ist, treten auf der Rückwandplatine gefährliche Spannungen oder Energien auf. Vorsicht bei der Wartung.

¡Advertencia!

Cuando el sistema está en funcionamiento, el voltaje del plano trasero es peligroso. Tenga cuidado cuando lo revise.

Attention!

Lorsque le système est en fonctionnement, des tensions électriques circulent sur le fond de panier. Prendre des précautions lors de la maintenance.

אזהרה!

קיימת סכנת מתח בפנל האחורי בזמן תפעול המערכת. יש להיזהר במהלך

העבודה.

!تحذير

هناك خطز مه التيار الكهزبائي أوالطاقة المىجىدة على اللىحة

عندما يكىن النظام يعمل كه حذرا عند خدمة هذا الجهاس

경고!

시스템이 동작 중일 때 후면판 (Backplane)에는 위험한 전압이나 에너지가 발생 합니다. 서비스 작업 시 주의하십시오.

Waarschuwing!

Een gevaarlijke spanning of energie is aanwezig op de backplane wanneer het systeem in gebruik is. Voorzichtigheid is geboden tijdens het onderhoud.

Comply with Local and National Electrical Codes



Warning! Installation of the equipment must comply with local and national electrical codes.

警告!

機器の取り付けはその地方および国の電気規格に準拠する必要があります。

警告!

设备安装必须符合本地与本国电气法规。

警告!

設備安裝必須符合本地與本國電氣法規。

Warnung!

Die Installation der Geräte muss den Sicherheitsstandards entsprechen.

¡Advertencia!

La instalacion del equipo debe cumplir con las normas de electricidad locales y nacionales.

Attention!

L'équipement doit être installé conformément aux normes électriques nationales et locales.

אזהרה!

התקנת הציוד חייבת להיות תואמת לחוקי החשמל המקומיים והארציים.

!تحذير

تركيب المعدات الكهربائية يجب أن يمتثل للقناويه المحلية والبطنية المتعلقة

بالكهرباء

경고!

현 지역 및 국가의 전기 규정에 따라 장비를 설치해야 합니다.

Waarschuwing!

Bij installatie van de apparatuur moet worden voldaan aan de lokale en nationale elektriciteitsvoorschriften.

Product Disposal

Warning! Ultimate disposal of this product should be handled according to all national laws and regulations.

警告!

この製品を廃棄処分する場合、国の関係する全ての法律・条例に従い処理する必要があります。

警告!

本产品的废弃处理应根据所有国家的法律和规章进行。

警告!

本產品的廢棄處理應根據所有國家的法律和規章進行。

Warnung!

Die Entsorgung dieses Produkts sollte gemäß allen Bestimmungen und Gesetzen des Landes erfolgen.

¡Advertencia!

Al deshacerse por completo de este producto debe seguir todas las leyes y reglamentos nacionales.

Attention!

La mise au rebut ou le recyclage de ce produit sont généralement soumis à des lois et/ou directives de respect de l'environnement. Renseignez-vous auprès de l'organisme compétent.

אזהרה!

סילוק סופי של מוצר זה חייב להיות בהתאם להנחיות וחוקי המדינה.

تحذير!

عند التخلص النهائي من هذا المنتج ينبغي التعامل معه وفقا لجميع القانين واللنائح البطنية

경고!

이 제품은 해당 국가의 관련 법규 및 규정에 따라 폐기되어야 합니다.

Waarschuwing!

De uiteindelijke verwijdering van dit product dient te geschieden in overeenstemming met alle nationale wetten en reglementen.

Fan Warning

Warning! Hazardous moving parts. Keep away from moving fan blades. The fans might still be turning when you remove the fan assembly from the chassis. Keep fingers, screwdrivers, and other objects away from the openings in the fan assembly's housing



警告!

警告！ 回転部品に注意。運転中は回転部(羽根)に触れないでください。シャーシから冷却ファン装置を取り外した際、ファンがまだ回転している可能性があります。ファンの開口部に、指、ドライバー、およびその他のものを近づけないで下さい。

警告!

警告！ 危险的可移动性零件。请务必与转动的风扇叶片保持距离。当您从机架移除风扇装置，风扇可能仍在转动。小心不要将手指、螺丝起子和其他物品太靠近风扇

警告!

危險的可移動性零件。請務必與轉動的風扇葉片保持距離。當您從機架移除風扇裝置，風扇可能仍在轉動。小心不要將手指、螺絲起子和其他物品太靠近風扇。

Warnung!

Gefährlich Bewegende Teile. Von den bewegenden Lüfterblätter fern halten. Die Lüfter drehen sich u. U. noch, wenn die Lüfterbaugruppe aus dem Chassis genommen wird. Halten Sie Finger, Schraubendreher und andere Gegenstände von den Öffnungen des Lüftergehäuses entfernt.

¡Advertencia!

Riesgo de piezas móviles. Mantener alejado de las aspas del ventilador. Los ventiladores podran dar vuelta cuando usted quite ell montaje del ventilador del chasis. Mandtenga los dedos, los destornilladores y todos los objetos lejos de las aberturas del ventilador.

Attention!

Pieces mobiles dangereuses. Se tenir a l'ecart des lames du ventilateur Il est possible que les ventilateurs soient toujours en rotation lorsque vous retirerez le bloc ventilateur du châssis. Prenez garde à ce que doigts, tournevis et autres objets soient éloignés du logement du bloc ventilateur.

אזהרה!

חלקים נעים מסוכנים. התרחק מלהבי המאוורר בפעולהכאשר מסירים את חלקי

המאוורר מהמארז, יתכן והמאווררים עדיין עובדים. יש להרחיק למרחק בטוח את

האצבעות וכלי עבודה שונים מהפתחים בתוך המאוורר

!تحذير

تحذير! أجزاء متحركة خطرة. ابتعد عن شفرات المروحة المتحركة.من الممكن أن

المراوح لا تزال تدور عند إزالة كتلة المروحة من الهيكل يجب إبقاء الأصابع

ومفكات البراغي وغيرها من الأشياء بعيدا عن الفتحات في كتلة المروحة.

경고!

움직이는 위험한 부품. 회전하는 송풍 날개에 접근하지 마세요. 섀시로부터 팬 조립품을 제거할 때 팬은 여전히 회전하고 있을 수 있습니다. 팬 조림품 외관의 열려있는 부분들로부터 손가락 및 스크류드라이버, 다른 물체들이 가까이 하지 않도록 배치해 주십시오.

Waarschuwing!

Gevaarlijk bewegende onderdelen. Houd voldoende afstand tot de bewegende ventilatorbladen. Het is mogelijk dat de ventilator nog draait tijdens het verwijderen van het ventilatorsamenstel uit het chassis. Houd uw vingers, schroevendraaiers en eventuele andere voorwerpen uit de buurt van de openingen in de ventilatorbehuizing.

Power Cable and AC Adapter



Warning! When installing the product, use the provided or designated connection cables, power cables and AC adaptors. Using any other cables and adaptors could cause a malfunction or a fire. Electrical Appliance and Material Safety Law prohibits the use of UL or CSA -certified cables (that have UL/CSA shown on the cord) for any other electrical devices than products designated by Supermicro only.

警告!

製品を設置する場合、提供または指定および購入された接続ケーブル、電源コードとACアダプターを該当する地域の条例や安全基準に適合するコードサイズやプラグと共に使用下さい。他のケーブルやアダプタを使用すると故障や火災の原因になることがあります。電気用品安全法は、ULまたはCSA認定のケーブル(UL/CSAマークがコードに表記) をSupermicro が指定する製品以外に使用することを禁止しています。

警告!

安装此产品时,请使用本身提供的或指定的或采购的连接线、电源线和电源适配器、包含遵照当 地法规和安全要求的合规的电源线尺寸和插头。使用其它线材或适配器可能会引起故障或火灾。除了Supermicro所指定的产品、电气用品和材料安全法律规定禁止使用未经UL或CSA认证的线材。(线材上会显示UL/CSA符号) 。

警告!

安裝此產品時,請使用本身提供的或指定的或採購的連接線、電源線和電源適配器、包含遵照當 地法規和安全要求的合規的電源線尺寸和插頭。使用其它線材或適配器可能會引起故障或火災。除了Supermicro所指定的產品、電氣用品和材料安全法律規定禁止使用未經UL或CSA認證的線材。(線材上會顯示UL/CSA符號) 。

Warnung!

Nutzen Sie beim Installieren des Produkts ausschließlich die von uns zur Verfügung gestellten Verbindungskabeln, Stromkabeln und/oder Adapater, die Ihre örtlichen Sicherheitsstandards einhalten. Der Gebrauch von anderen Kabeln und Adapter können Fehlfunktionen oder Feuer verursachen. Die Richtlinien untersagen das Nutzen von UL oder CAS zertifizierten Kabeln (mit UL/CSA gekennzeichnet), an Geräten oder Produkten die nicht mit Supermicro gekennzeichnet sind.

¡Advertencia!

Cuando instale el producto, utilice la conexión provista o designada o procure cables, Cables de alimentación y adaptadores de CA que cumplan con los códigos locales y los requisitos de seguridad, incluyendo el tamaño adecuado del cable y el enchufe. El uso de otros cables y adaptadores podría causar un mal funcionamiento o un incendio. La Ley de Seguridad de Aparatos Eléctricos y de Materiales prohíbe El uso de cables certificados por UL o CSA (que tienen el certificado UL / CSA en el código) para cualquier otros dispositivos eléctricos que los productos designados únicamente por Supermicro.

Attention!

Lors de l'installation du produit, utilisez les cables de connection fournis ou désigné ou achetez des cables, cables de puissance et adaptateurs respectant les normes locales et les conditions de securite y compris les tailles de cables et les prises electriques appropries. L'utilisation d'autres cables et adaptateurs peut provoquer un dysfonctionnement ou un incendie. Appareils électroménagers et la Loi sur la Sécurité Matériel interdit l'utilisation de câbles certifies- UL ou CSA (qui ont UL ou CSA indiqué sur le code) pour tous les autres appareils électriques sauf les produits désignés par Supermicro seulement.

אזהרה!

ךרוצל ומאתוה וא ושכרנ רשא AC ימאתמו יקפס ,ילבכב שמתשהל שי ,רצומה תא יניקתמ רשאכ לכב שומיש . עקתהו לבכה לש הנוכנ הדימ ללוכ ,תוימוקמה תוחיטבה תושירדל ומאתוה רשאו ,הנקתהה למשחה ירישכמב שומישה יקוחל םאתהב .ילמשח רצק וא הלקתל סורגל לולע ,רחא גוסמ םאתמ וא לבכ לש דוק סהילע עיפומ רשאכ) CSA- ב וא UL - ב יכמסומה ילבכב שמתשהל רוסיא ייק ,תוחיטבה יקוחו דבלב Supermicro י"ע מאתוה רשא רצומב קר אלא ,רחא ילמשח רצומ לכ רובע UL/CSA).

!تحذير

تالباكلا ءارشب مق وأ ةددحملا وأ ةرفوتملا تاليصوتلا مادختساب مق ،جتنملا بيكرت دنع

كلذ يف امب ةيلحملا ةمالسلا تابلطتمو نيناوقب مازتلالا عم ددرتملا رايتلا تالوحمو ةيئابر هكلا

قيرح وأ لطع يف ببستي دق برخأ تالوحمو تالباك يأ مادختسا .ميلسلا سباقلاو لصوملا مجح.

CSA وأ UL لبق نم ةدمتعملا تالباكلا مادختسا تادعملاو ةيئابر هكلا تز هجألل ةمالسلا نوناق رظحي

Supermicro لبق نم ةددحملاو ةينعملا تاجتنملا ريغ برخأ تادعم يأ عم (UL/CSA) ةمالع لمحت يتلاو.

경고!

제품을 설치할 때 현지 코드 및 적절한 굵기의 코드와 플러그를 포함한 안전 요구 사항을 준수하여 제공되거나 지정된 연결 혹은 구매 케이블, 전원 케이블 및 AC 어댑터를 사용하십시오.

다른 케이블이나 어댑터를 사용하면 오작동이나 화재가 발생할 수 있습니다. 전기 용품 안전법은 UL 또는 CSA 인증 케이블 (코드에 UL / CSA가 표시된 케이블)을 Supermicro 가 지정한 제품 이외의 전기 장치에 사용하는 것을 금지합니다.

Waarschuwing!

Bij het aansluiten van het Product uitsluitend gebruik maken van de geleverde Kabels of een andere geschikte aan te schaffen Aansluitmethode, deze moet altijd voldoen aan de lokale voorschriften en veiligheidsnormen, inclusief de juiste kabeldikte en stekker. Het gebruik van niet geschikte Kabels en/of Adapters kan een storing of brand veroorzaken. Wetgeving voor Elektrische apparatuur en Materiaalveiligheid verbied het gebruik van UL of CSA - gecertificeerde Kabels (met UL/CSA in de code) voor elke andere toepassing dan de door Supermicro hiervoor beoogde Producten.

Appendix C:

System Specifications

Processors
Single AMD EPYC™ 9005/9004-series processors in Socket SP5 with a Thermal Design Power (TDP) unit up to 500 W **Note:** Dependent on thermal validation and system configuration. Contact a Supermicro representative for details.
Chipset
System on Chip (SoC)
BIOS
512 Mb AMI BIOS® SPI Flash BIOS ACPI 6.5, SMBIOS 3.7 or later, Plug-and-Play (PnP), RTC (Real Time Clock) wakeup, Riser Card Auto-Detection support
Memory
12 DIMM slots with 1DPC that support up to 3 TB of ECC DDR5/3DS RDIMM at 6400 MT/s (9005 Series CPU) or 3 TB of ECC DDR5/3DS RDIMM at 4800 MT/s (9004 Series CPU) Note: For detail, please refer to "Memory Support and Installation" on page 53.
Storage Drives
Up to 12 2.5" front hot-swap NVMe/SAS/SATA drive bays (Drive options require additional parts) Up to two M.2 NVMe PCIe 3.0 x4 M-Key slots in 2280 and 22110 form factors (M.2 support requires an optional DC-MHS M.2 Boot Board)
PCI Expansion Slots
Two expansion slots (PCIe 5.0 x16, FHHL) One AIOM slot (PCIe 5.0 x16), OCP 3.0 compatible
Input/Output
One display port by DC-SCM One USB 3.2 Gen1 port by CD-SCM One USB 2.0 (SMC debug port) by DC-SCM One TPM header
Motherboard
H14SHM; proprietary (WxL) 8.27" x 12.03" (21.01 x 30.56 cm)
Chassis
CSE-MD101TS-R000NDP; (WxHxD) 17.2" x 1.7" x 29.4" (437 x 43 x 747 mm)
System Cooling
Up to eight counter-rotating 4-cm heavy duty fans with optimal fan speed control One air shroud

Power Supply
Optional: Two 1000/2000 W CRPS redundant Titanium Level (96%) power supplies (Refer to the table at the end of this section for details on this system's power supply options.) **Note:** Power supply redundancy is based on configuration and application load.
Operating Environment
Operating Temperature: 10º to 35º C (50º to 95º F); Operating temperature based on configurations Non-operating Temperature: -40º to 60º C (-40º to 140º F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Regulatory Compliance
FCC, ICES, CE, UKCA, VCCI, RCM, NRTL, CB
Certified Safety Models
MD101-R10H14, MD101-10, MD101-R20H14, MD101-20, MD101-R16H14, MD101-16

Applied Directives, Standards

Directives:

EMC/EMI: 2014/30/EU (EMC Directive)

Electromagnetic Compatibility Regulations 2016

FCC Part 15 Subpart B

ICES-003

VCCI-CISPR 32

AS/NZS CISPR 32

CISPR 32

CISPR 35

BS/EN 55032

BS/EN 55035

BS/EN 61000-3-2

BS/EN 61000-3-3

BS/EN 61000-4-2

BS/EN 61000-4-3

BS/EN 61000-4-4

BS/EN 61000-4-5

BS/EN 61000-4-6

BS/EN 61000-4-8

BS/EN 61000-4-11

Environment:

Delegated Directive (EU) 2015/863

Directive 2011/65/EU (RoHS)

REACH Regulation EC 1907/2006

WEEE Directive 2012/19/EU

California Proposition 65

Product Safety:

2014/35/EU (LVD Directive)

UL/CSA 62368-1 (USA and Canada)

Electrical Equipment (Safety) Regulations 2016

IEC/BS/EN 62368-1

Perchlorate Warning

California Best Management Practices Regulations for Perchlorate Materials: This Perchlorate warning applies only to products containing CR (Manganese Dioxide) Lithium coin cells. Perchlorate Material-special handling may apply. See https://www.dtsc.ca.gov/hazardouswaste/perchlorate

Power Supply Options

Model PWS-1K04A-1R: Two 1000 W Redundant (1 + 1) Titanium Level (96%) power supplies
AC Input
800 W: 100 VAC – 127 VAC / 50 Hz – 60 Hz
1000 W: 200 VAC – 240 VAC / 50 Hz – 60 Hz
DC Output
+12 V
Max: 66.7 A (100 VAC – 127 VAC)
Max: 83 A (200 VAC – 240 VAC)
12 V SB
Max: 2.1 A
Model PWS-2K09A-1R: Two 2000 W Redundant (1 + 1) Titanium Level (96%) power supplies
AC Input:
1000 W: 100 VAC – 127 VAC / 50 Hz – 60Hz
1800 W: 200 VAC – 220 VAC / 50 Hz – 60Hz
1980 W: 220 VAC – 230 VAC / 50 Hz – 60Hz
2000 W: 230 VAC– 240Vac / 50 – 60 Hz
2000 W: 220 VAC – 240 VAC / 50 – 60 Hz (for UL only)
2000 W: 230 VDC –240 VDC / 50 – 60 Hz (for CQC only)
DC Output
+12V
Max: 83 A / Min: 0 A (100 VAC – 127 VAC)
Max: 150 A / Min: 0 A (200 VAC – 220 VAC)
Max: 165 A / Min: 0 A (220VAC – 230VAC)
Max: 166 A / Min: 0 A (230 VAC – 240 VAC)
12V SB
Max: 3.5 A / Min: 0 A

Appendix D:

Particulate and Gaseous Contamination Limits

Data centers should meet the following requirements to maintain proper air quality.

Particulate Contamination Specifications

All sources of dust inside data centers should be reduced or eliminated. Dust having a deliquescent relative humidity of less than the maximum allowable relative humidity should be filtered out.

The cleanliness of data centers must adhere to ISO Standard 14644-1 Class 8 (ISO 2015) to be within 95% of the levels specified below:

1. Each cubic meter of air should contain no more than 3,520,000 particles that are equal to or greater than 0.5 µm in diameter.
2. Each cubic meter of air should contain no more than 832,000 particles that are equal to or greater than 1 µm in diameter.
3. Each cubic meter of air should contain no more than 29,300 particles that are equal to or greater than 5 µm in diameter.

This level of cleanliness can generally be achieved by an appropriate filtration scheme as outlined below:

1. The room air should be continuously filtered with MERV 8 filters, as recommended by AHRI Standard 1360 (2017).
2. The air entering the data center should be filtered with MERV 11 to MERV 13 filters.

Gaseous Contamination Specifications

The total gaseous contamination, i.e., copper and silver corrosion rates, should not exceed ANSI/ISA Standard 71.04-2013, severity level G1 (mild) as described below:

1. A copper reactivity rate of less than 300 Å/month.
2. A silver reactivity rate of less than 200 Å/month.

Appendix E:

Statement of Volatility (SOV)

The Statement of Volatility provides information about volatile and non-volatile components of the AS -1116CS-TN server. When power is removed from the system, non-volatile components retain their data, while volatile components lose their data.

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
MBD-H14SHM				
CPU0 VDDCR_CPU0 & VDDCR_SOC VRM	UPA16	NON-VOLATILE	NO	NO ACTION REQUIRED
CPU0 VDDCR_CPU1 & VDDIO VRM	UPB8	NON-VOLATILE	NO	NO ACTION REQUIRED
CPU0 VDD11_SUS VRM	UQ8	NON-VOLATILE	NO	NO ACTION REQUIRED
CPLD	U30	NON-VOLATILE	NO	USE PROGRAMMER TO ERASE

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
PWS-1K04A-1R				
UCD3138064RGCR	U601	NON-VOLATILE	NO	USE PROGRAMMER TO CLEAR
UCD3138RHAR	U104	NON-VOLATILE	NO	USE PROGRAMMER TO CLEAR

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
PWS-2K09A-1R				
UCD3138064RGCR	U601	NON-VOLATILE	NO	USE PROGRAMMER TO CLEAR
UCD3138RHAR	U13	NON-VOLATILE	NO	USE PROGRAMMER TO CLEAR

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
RSC-MR-6G5-UP				
FRU EEPROM	U2	NON-VOLATILE	NO	USE PROGRAMMER TO ERASE

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
RSC-M-6G5-UP				
FRU EEPROM	U2	NON-VOLATILE	NO	USE PROGRAMMER TO ERASE

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
AOM-DCPDB-H101-P				
CPLD	U1	NON-VOLATILE	NO	USE PROGRAMMER TO ERASE
E-FUSE	UF2 UF10	NON-VOLATILE	NO	USE PROGRAMMER TO ERASE

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
AOM-DC201-FAN				
EEPROM	U2			

SMC Product Number (Customer Product Number, if Applicable)				
Device	**Reference**	**Volatility**	**User Data**	**Procedure to Clear for User Data**
AOM-SCM-DCX6				
BIOS SPI Flash	UM16	NO	NO	Use Software and Utility to erase
BMC EMMC U	UM10	NO	NO	Use Software and Utility to erase
BMC SPI Flash	UM7	NO	NO	Use Software and Utility to erase