



# Windows Storage Server 2012 R2 on Supermicro High-Capacity 3U Cluster-in-a-Box

Supermicro's 3U SuperStorage Bridge Bay running Windows Storage Server 2012 R2 Standard is a fully redundant, fault-tolerant Cluster-in-a-Box designed for mission-critical, enterprise storage.

## Mission-Critical, Enterprise Storage at an Affordable Price

Part of Supermicro's SuperStorage Bridge Bay (Super SBB) line, the SSG-6037B-CIB032 is designed to provide reliable, enterprise-grade storage for SMB and remote office environments at an affordable price. Key features and benefits include:

- **Hot-swappable modules for all active components** – including storage controllers, power supplies, and disk drives.
- **Ready-to-deploy** – delivered with Windows Storage Server 2012 R2 Standard preinstalled and Failover Clustering preconfigured across the two compute nodes.
- **Native integration with Active Directory** – enabling fast and easy deployment in existing Windows Server-based IT infrastructures.
- **Easily expanded** – built-in expansion ports make it easy to connect up to four Super SBB 937R-E2JB JBODs, each of which supports 16x 3.5" SAS2/SATA3 drives.


With the SSG-6037B-CIB032 running Windows Storage Server 2012 R2 Standard, you'll have access to the latest storage innovations from Microsoft, including:

- **Data Deduplication and Storage Spaces** – for maximizing and scaling your storage capacity.
- **Storage Tiers, SMB Direct, SMB Multichannel, and NIC Teaming** – for maximum performance.
- **Enhancements to Failover Clustering and Hyper-V** – for improved reliability.

For more information on all the capabilities built into Windows Storage Server 2012 R2 Standard, visit [www.microsoft.com/windowsserver](http://www.microsoft.com/windowsserver).

## Typical Deployment Model

The following diagram shows a typical deployment model for the SSG-6037B-CIB032 running Windows Storage Server 2012 R2 Standard in a datacenter environment.

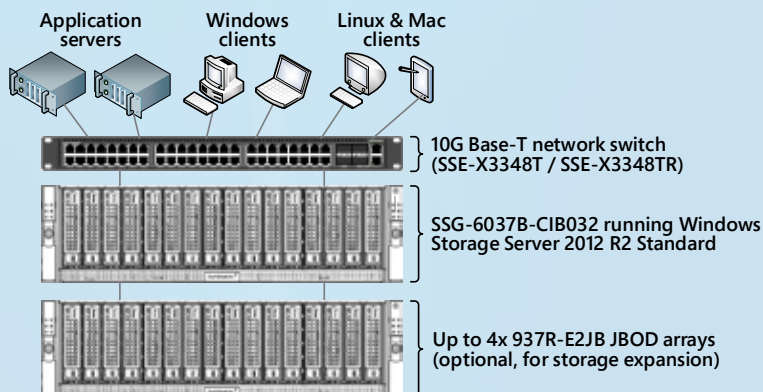

## SSG-6037B-CIB032 AT-A-GLANCE

- Two hot-pluggable systems (nodes) in a 3U form factor
- 2 Intel Xeon E5-2403 v2 1.8GHz processors per node
- 32TB raw storage capacity (user expandable)
- Windows Storage Server 2012 R2 Standard preinstalled on internal SATA DOM (one DOM per node)
- 32GB system memory per node (user expandable)
- 3x PCI-E 3.0 x8 slots per node
- 6 Gbps LSI 2308 SAS2 controller per node (daughtercard on motherboard)
- 2 hot-plug JBOD expansion ports per node

## Base System Specifications

The SSG-6037B-CIB032 is a preconfigured system, built to the following specifications. Full specifications can be found at: <http://www.supermicro.com/products/system/3U/6037/SSG-6037B-DE2R16L.cfm>

PRODUCT SKU	
SSG-6037B-CIB032	SuperServer 6037B-CIB032 (Black)
MOTHERBOARD (PER NODE)	
1x Super X9DBS-F	
PROCESSOR / CACHE (PER NODE)	
CPU	2x Intel® Xeon® E5-2403 v2 processors (1.8GHz)
Cache	10MB/processor
System Bus	6.4GT/s QPI
SYSTEM MEMORY (PER NODE)	
Memory Capacity	<ul style="list-style-type: none"> <li>6x 240-pin DIMM sockets</li> <li>32GB installed (2x 16GB DIMMs)</li> <li>Memory Mirroring supported</li> </ul>
Memory Type	1600 ECC Registered / ECC DDR3 SDRAM 72-bit, 240-pin gold-plated DIMMs
Memory Voltage	1.35V
EXPANSION SLOTS (PER NODE)	
PCI-Express	3x PCI-E 3.0 x8 slots (on riser)
NETWORKING (PER NODE)	
LAN Ports	2x GbE LAN ports (One for IPMI 2.0)
Server Management	<ul style="list-style-type: none"> <li>Intelligent Platform Management Interface (IPMI 2.0) with internal node to node link</li> <li>Virtual media and KVM-over-LAN support</li> </ul> See <a href="http://www.supermicro.com/products/info/IPMI.cfm">www.supermicro.com/products/info/IPMI.cfm</a> for more information

CHASSIS AND DIMENSIONS	
Form Factor	3U Rackmount
H x W x D	5.2" (132mm) x 17.2" (437mm) x 25.5" (648mm)
INTEGRATED STORAGE	
Hot-swap	<ul style="list-style-type: none"> <li>32TB raw capacity (16x hot-swap 3.5" drive bays populated with 8x 4TB 7200 RPM nearline SAS drives)</li> <li>SAS or enterprise SATA HDD only recommended</li> <li>SATA drives require LSI interposer</li> </ul>
Internal	64GB SATA DOM (disk on module) per node with Windows Storage Server 2012 R2 Standard preinstalled
JBOD EXPANSION	
2x SAS2 expansion ports per node (mini-SAS HD)	
BACKPLANE	
SAS2 dual expander backplane, featuring: <ul style="list-style-type: none"> <li>Scalability through cascading</li> <li>6Gb SAS2/SATA3 HDD support</li> <li>Inband SES-2 enclosure management</li> <li>Redundancy dual ported SAS architecture</li> <li>Robust AirMax server node connections (SBB specification)</li> </ul>	
SYSTEM COOLING	
Fans	12x PWM Fans
POWER SUPPLY WITH POWER DISTRIBUTOR	
920W high-efficiency AC-DC Redundant power supplies with PMBus and I2C	

## Networking Options

The high capacity provided by this model makes it ideal for workloads such as archiving or traditional file serving. For faster data transfer and more bandwidth, the following Supermicro networking cards are supported and can be added in pairs to the PCI expansion slots:

DESCRIPTION	SUPERMICRO PART NUMBER
Quad-port 1G	AOC-ST-i4
Dual-port 10G Base-T	AOC-STG-i2T
Dual-port 10G SPF Plus	AOC-STGN-i2S

More information on Supermicro networking products can be found at [www.supermicro.com/products/info/networking.cfm](http://www.supermicro.com/products/info/networking.cfm).



## Easy Expansion

The use of Data Deduplication in Windows Storage Server 2012 R2 Standard can provide a significant increase in storage efficiency for many common storage workloads. After maximum capacity is reached, the SSG-6037B-CIB032 can easily be expanded by connecting its built-in JBOD expansion port to a Super SBB JBOD (Supermicro P/N SYS-937R-E2JB), which supports 16x 3.5" SAS2/SATA3 drives. Up to four JBODs can be attached, providing up to an additional 384TB of raw disk capacity when populated with 6TB nearline SAS drives.

For more information, call your Supermicro sales representative and ask about P/N SSG-6037B-CIB032.