

Storage SuperServer SSG-229J-5BE36JBF

2U front-loading all-flash Modular Bluefield-3 based SDS Storage enclosure with 36 hot-swap 2.5" NVMe bays and PCIe 5.0 with GPU/DPU support for LLM applications



More details here

Key Applications

Big Data Analytics and AI, HPC and Big Data, Data Center Enterprise Applications, Artificial Intelligence, Low Power, Cost effective, NVMe Over Fabrics Solution, Large Language Model (LLM),

Key Features

- Two **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following:;
- IPMI management with dedicated LAN BF3 management with shared LAN;
- Up to 3 PCIe 5.0 x16 FHFL slots Up to 2 DPU and 1 GPU per node;
- Up to 36 front hot-swap E3.S 1T NVMe drive bays;
- 2 Redundant 2000W Titanium Level power supplies;




Form Factor	2U Rackmount Enclosure: 449.4 x 88 x 762mm (17.7" x 3.47" x 30") Package: 670 x 245 x 1100mm (26.37" x 9.64" x 43.3")
Drive Bays Configuration	Default: Total 36 bays <ul style="list-style-type: none">• 36 front hot-swap E3.S 1T NVMe drive bays M.2: 2 M.2 PCIe 5.0 x4 NVMe slots (M-key 2280/22110)
Expansion Slots	Default <ul style="list-style-type: none">• 3 PCIe 5.0 x16 FHFL slots
On-Board Devices	Chipset: System on Chip Network Connectivity: 2 QSFP+ 200GbE with NVIDIA® BlueField®-3 1 RJ45 1GbE with Realtek

(Front View - System)



Drive Bay	Description
1 - 30	36 Hot-swap E3.5 NVMe Drive Bays

(Rear View - System)

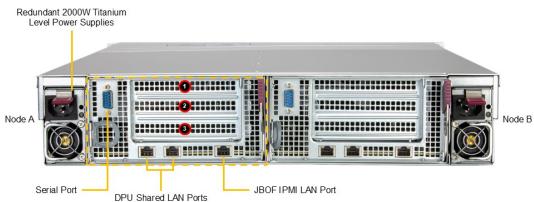

Slot Description
PCIe 5.0 x16 FHHL for DPU
PCIe 5.0 x16 FHFL for GPU

System Cooling

Fans: Up to 6 Heavy Duty 60mm Fan(s)

Power Supply

2x 2000W Redundant Titanium Level (96%) power supplies

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

Dimensions and Weight

Weight: Gross Weight: 94.8 lbs (43 kg)

Net Weight: 71.88 lbs (32.6 kg)

Available Color: Silver

Operating Environment

RoHS Compliant

Operating Temperature: 10°C to 35°C (50°F to 95°F)

Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)

Operating Relative Humidity: 8% to 90% (Non-Condensing)

Non-operating Relative Humidity: 5% to 95% (Non-Condensing)

Motherboard

[**Super BPN-NVME5-229PL-J**](#)

Chassis

CSE-229ES-R000RCNDP