

# BigTwin SuperServer SYS-621BT-HNTR

2U 4-Node BigTwin with 3 hot-swap 3.5" NVMe/SATA drives per node



More details here

## Key Applications


Hyperconverged Infrastructure, Container Storage, Scale-Out File Server,

## Key Features


- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;:
- Socket E (LGA 4677) support 5th/4th Gen Intel® Xeon® Scalable processors;
- Intel® C741;
- 16 DIMM Slots supporting up to 4TB of memory; ECC RDIMMs up to DDR5-5600;
- Internal PCIe 4.0 x8 for 2 M.2 NVMe support onboard  
2 PCIe 5.0 x16 (LP) slot; Tool-less support  
Optional M.2 (22x80) HW RAID1 NVMe Boot Controller via SCC-A2NM2241G3-B1;
- Network connectivity via AIOM (OCP 3.0 compliant);
- 3 hot-swap 3.5" drive bays (2x PCIe 5.0 NVMe/SATA and 1x PCIe 4.0 NVMe/SATA);
- Liquid Cooling Support  
4 cooling fans per 2U enclosure, 14.9K RPM; Shared Cooling Design;
- 3000W Redundant Power Supplies Titanium Level (96%+); Shared Power Design;



<b>Form Factor</b>	2U Rackmount Enclosure: 449 x 88 x 774mm (17.68" x 3.47" x 30.5") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28")
<b>Processor</b>	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon®/4th Gen Intel® Xeon® Scalable processors Supports Intel Xeon CPU Max Series with high bandwidth memory (HBM) Up to 64C/128T; Up to 320MB Cache per CPU
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM
<b>Drive Bays Configuration</b>	Default: Total 3 bays <ul style="list-style-type: none"> <li>• 2 front hot-swap 3.5" PCIe 5.0 NVMe/SATA drive bays</li> <li>• 1 front hot-swap 3.5" PCIe 4.0 NVMe/SATA drive bay</li> </ul> M.2: 2 M.2 PCIe 4.0 x4 NVMe slots (M-key 22110(default); VROC required for RAID)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x16 LP slots</li> <li>• 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible)</li> </ul>
<b>On-Board Devices</b>	Via AIOM
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 Gen2 Type-A ports(Rear) Video: 1 VGA port

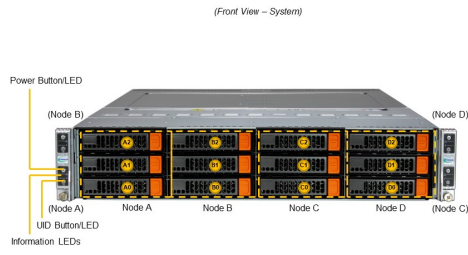

Drive Bay (Node A-D)	Description
0-1	2x 3.5" Hot-Swap NVMe Gen5 (CPU)/SATA Drive Bays
2	1x 3.5" Hot-Swap NVMe Gen4 (CPU)/SATA Drive Bays

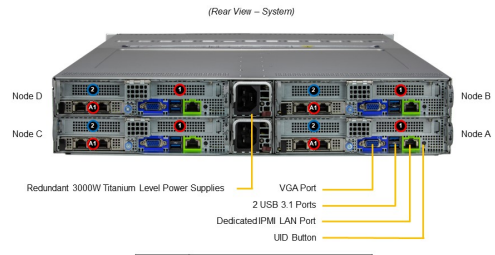

Slot (Node A-D)	Description
0	PCIe 5.0 x16 AOM Slot
1	PCIe 5.0 x16 (LP) Slot
2	PCIe 5.0 x16 (LP) Slot

CPU1 CPU2

System Cooling	Fans: Up to 4x 14.9K RPM Heavy Duty 8cm Fan(s) Air Shroud: 4 Air Shrouds Liquid Cooling: Direct to Chip (D2C) Cold Plate (optional)
Power Supply	2x 3000W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB Flash ROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 8+4 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory. FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment
Dimensions and Weight	Weight: Gross Weight: 96.6 lbs (43.8 kg) Net Weight: 66.1 lbs (30 kg) Available Color: Black front & silver body
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing)
Motherboard	<a href="#">Super X13DET-B</a>
Chassis	<a href="#">CSE-827BQ2-R3K04P</a>