



SUPERMICR® SuperServer® SSG-122B-NE316R Quick Reference Guide

Front Features

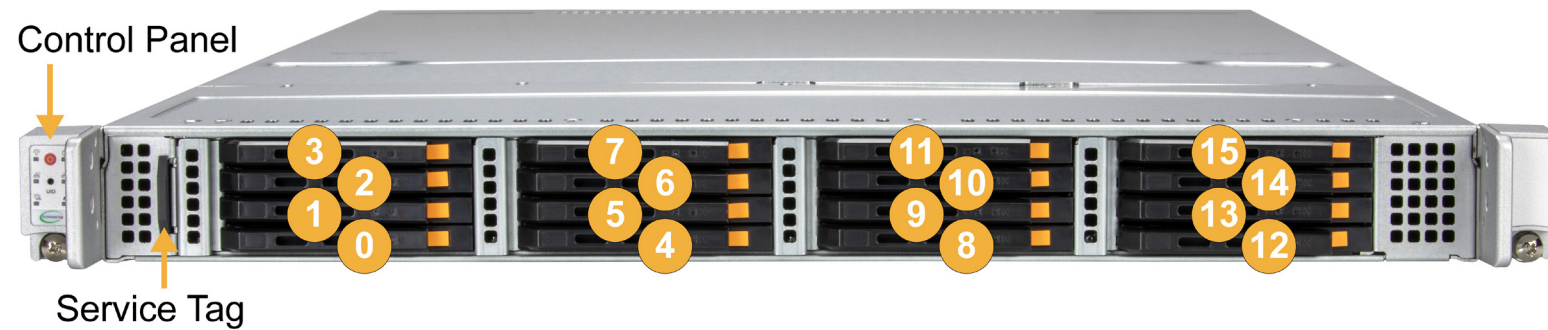


Front Features	
Feature	Description
Control Panel	One front control panel with power button and LEDs
Service Tag	Service tag with BMC admin password
0-15	16 E3.S (7.5 mm) drive bays

Control Panel

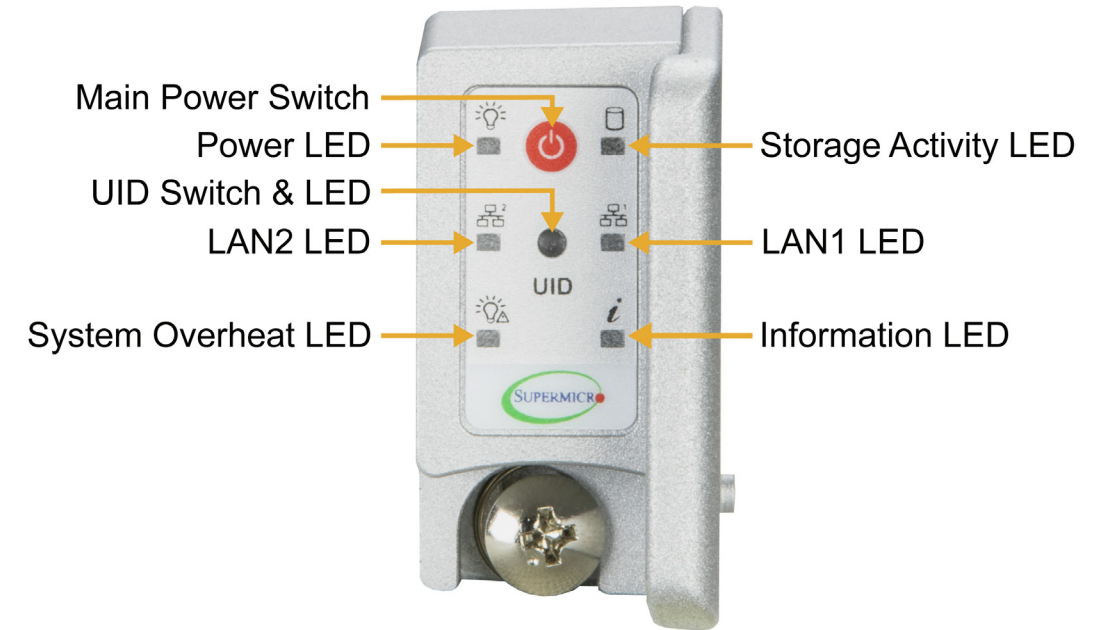

UID Switch/BMC Button: The unit identification (UID) button turns on or off the blue light function of the Information LED. This button can also be used to reset the BMC.

Rear Features

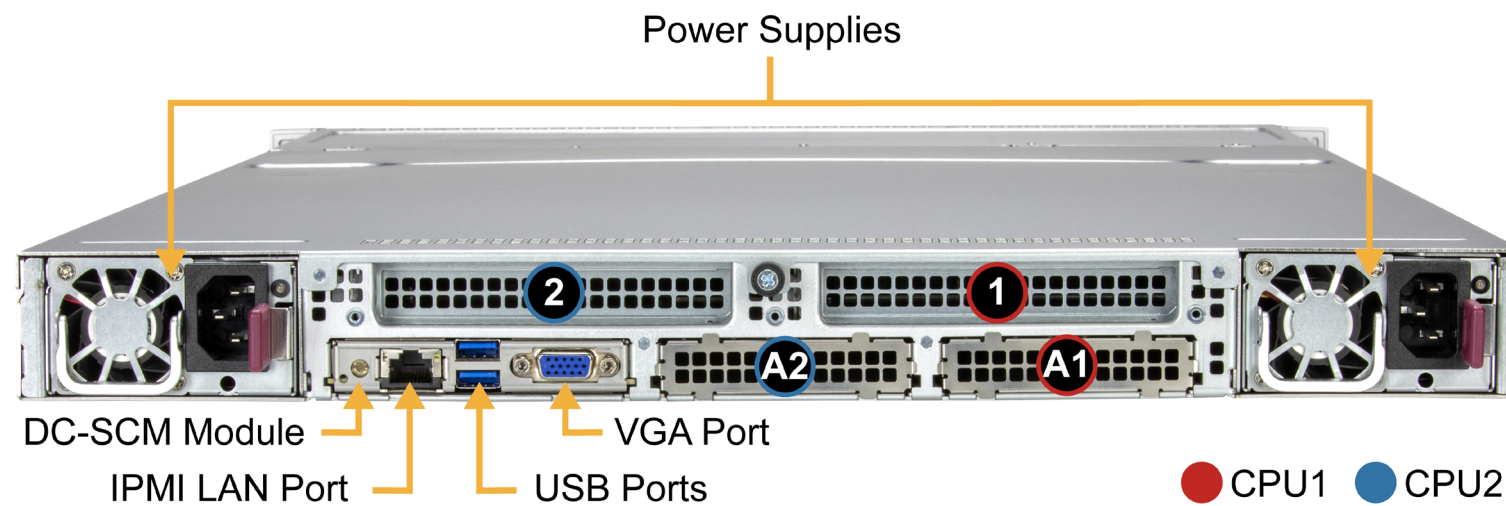

Rear Features	
Feature	Description
Power Supplies	Two redundant 2000 W system power supply modules
DC-SCM Module	One AOM-SCM-DCX6 module
VGA Port	One video port
IPMI LAN Ports	One dedicated IPMI LAN port
USB Ports	Two USB 3.0 ports
1, 2	Two full-height, half-length (FHHL) PCIe expansion slots
A1, A2	Two PCIe 5.0 x16 AIOM slots (OCP 3.0 compatible)

Information LED

Color, Status	Description
Red, solid	An overheat condition has occurred
Red, blinking at 1 Hz	Fan failure; check for an inoperative fan
Red, blinking at 0.25 Hz	Power failure; check for an inoperative power supply
Red, solid with Power LED blinking green	Fault detected
Blue and red, blinking at 10 Hz	Recovery mode
Blue, solid	UID has been activated locally to locate the server in a rack environment
Blue, blinking at 1 Hz	UID has been activated via BMC to locate the server in a rack environment
Blue, blinking at 2 Hz	BMC is resetting
Blue, blinking at 4 Hz	BMC is setting factory defaults
Blue, blinking at 10 Hz with Power LED blinking green	BMC/BIOS firmware is updating

BMC Password

Each system comes with a unique default password for the ADMIN user. This can be found on a sticker on the motherboard and another on the chassis service tag. If necessary, the password can be reset.

For more information, please visit <https://www.supermicro.com/en/solutions/management-software/bmc-resources>

Product Page



MNL-2753-QRG-100

© 2025 Supermicro Computer Inc. All rights reserved. Reproduction of this document, whether in part or in whole, is strictly prohibited without Supermicro's written consent. All trademarks are property of their respective entities. All information provided is deemed accurate at the time of printing, however, it is not guaranteed.