


SUPERMICR SuperServer F627R3-RTB+/R72B+ Quick Reference Guide

Board Layout

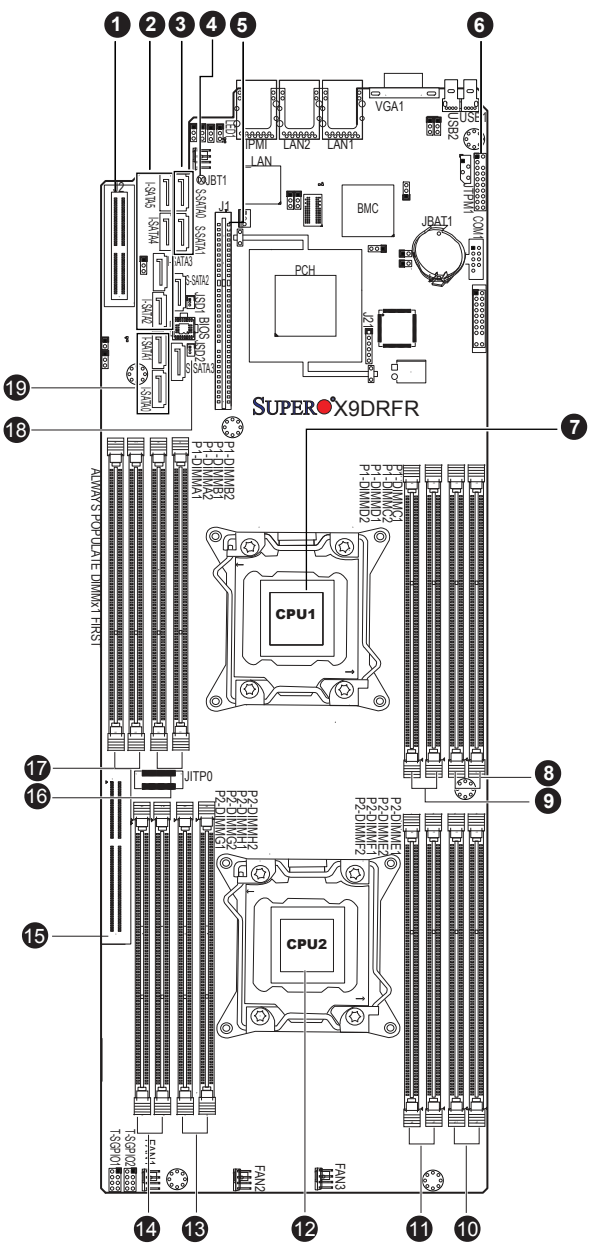

No.	Description	No.	Description
1	CPU1 Slot1 PCI-E 3.0 x8 Micro Low-Profile	11	P2-DIMMF1 (Blue Slot) / DIMMF2
2	I-SATA2~5: SATA 2.0 Ports	12	CPU2 Socket
3	S-SATA0~1: SATA 2.0 Ports	13	P2-DIMMH1 (Blue Slot) / DIMMH2
4	JBT1: CMOS Clear	14	P2-DIMMG1 (Blue Slot) / DIMMG2
5	CPU1 Slot1 PCI-E 3.0 x16	15	CPU2 Slot1 PCI-E 3.0 x8 Slot for SMC-Proprietary Add-On Card
6	JTPM1: Trusted Platform Module Header	16	P1-DIMMB1 (Blue Slot) / DIMMB2
7	CPU1 Socket	17	P1-DIMMA1 (Blue Slot) / DIMMA2
8	P1-DIMMC1 (Blue Slot) / DIMMC2	18	JSD2: Disk-On-Module power connector
9	P1-DIMMD1 (Blue Slot) / DIMMD2	19	I-SATA 0/1: SATA 3.0 Ports
10	P2-DIMME1 (Blue Slot) / DIMME2		

Memory


Processors and their Corresponding Memory Modules						
CPU#	Corresponding DIMM Modules					
CPU 1	P1-DIMMA1	P1-DIMMB1	P1-DIMMC1	P1-DIMMA2	P1-DIMMB2	P1-DIMMD2
CPU 2	P2-DIMME1	P2-DIMMF1	P2-DIMMG1	P2-DIMMH1	P2-DIMME2	P2-DIMMH2

Processors and Memory Module Population for Optimal Performance	
Number of CPUs + DIMMs	CPU and Memory Population Configuration Table (For memory to work properly, follow the instructions below)
1 CPU & 2 DIMMs	CPU1 & P1-DIMMA1/P1-DIMMB1
1 CPU & 4 DIMMs	CPU1 & P1-DIMMA1/P1-DIMMB1, P1-DIMMC1/P1-DIMMD1
1 CPU & 5~8 DIMMs	CPU1 & P1-DIMMA1/P1-DIMMB1, P1-DIMMC1/P1-DIMMD1 + Any memory pairs in P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2 slots
2 CPUs & 4 DIMMs	CPU1 + CPU2 & P1-DIMMA1/P1-DIMMB1, P2-DIMME1/P2-DIMMF1
2 CPUs & 6 DIMMs	CPU1 + CPU2 & P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1
2 CPUs & 8 DIMMs	CPU1 + CPU2 & P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1
2 CPUs & 10~16 DIMMs	CPU1 + CPU2 & P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1 + Any memory pair in P1, P2 DIMM slots
2 CPUs & 16 DIMMs	CPU1 + CPU2 & P1-DIMMA1/P1-DIMMB1/P1-DIMMC1/P1-DIMMD1, P2-DIMME1/P2-DIMMF1/P2-DIMMG1/P2-DIMMH1, P1-DIMMA2/P1-DIMMB2/P1-DIMMC2/P1-DIMMD2, P2-DIMME2/P2-DIMMF2/P2-DIMMG2/P2-DIMMH2


Installing RDIMM Memory							
Intel E5-2600 v2 Series Processor RDIMM Memory Support							
Ranks per DIMM & Data Width	Memory Capacity Per DIMM (See the Note below)			Speed (MT/s) and Voltage Validated by Slot per Channel (SPC) and DIMM Per Channel (DPC)			
				2 Slots Per Channel			
				1DPC		2DPC	
				1.35V	1.5V		1.35V
SRx8	1GB	2GB	4GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600
DRx8	2GB	4GB	8GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600
SRx4	2GB	4GB	8GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600
DRx4	4GB	8GB	16GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600
QRx4	8GB	16GB	32GB	800	800, 1066	800	800
QRx8	4GB	8GB	16GB	800	800, 1066	800	800

Installing UDIMM (ECC/non-ECC) Memory							
Intel E5-2600 v2 Series Processor UDIMM Memory Support							
Ranks per DIMM & Data Width	Memory Capacity Per DIMM (See the Note below)			Speed (MT/s) and Voltage Validated by Slot per Channel (SPC) and DIMM Per Channel (DPC)			
				2 Slots Per Channel			
				1DPC		2DPC	
				1.35V	1.5V	1.35V	1.5V
SRx8 Non-ECC	1GB	2GB	4GB	NA	1066, 1333, 1600, 1866	NA	1066, 1333, 1600
DRx8 Non-ECC	2GB	4GB	8GB	NA	1066, 1333, 1600, 1866	NA	1066, 1333, 1600
SRx16 Non-ECC	512MB	1GB	2GB	NA	1066, 1333, 1600, 1866	NA	1066, 1333, 1600
SRx8 ECC	1GB	2GB	4GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600
QRx8 ECC	2GB	4GB	8GB	1066, 1333	1066, 1333, 1600, 1866	1066, 1333	1066, 1333, 1600


Nodes and Corresponding Hard Drives

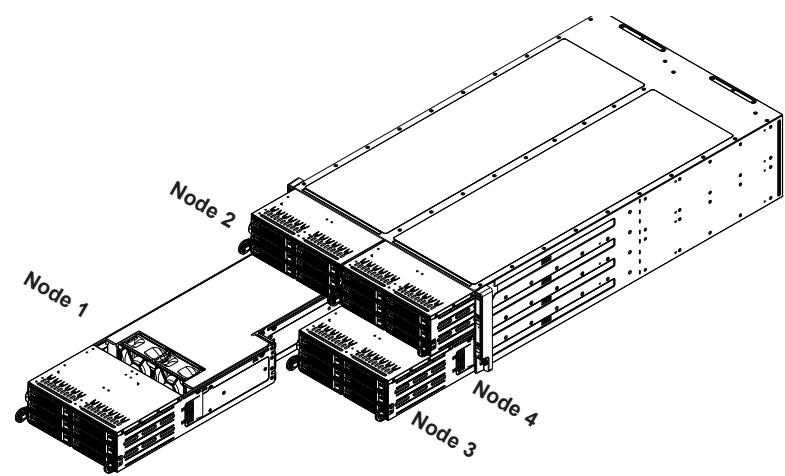

Front View & Interface

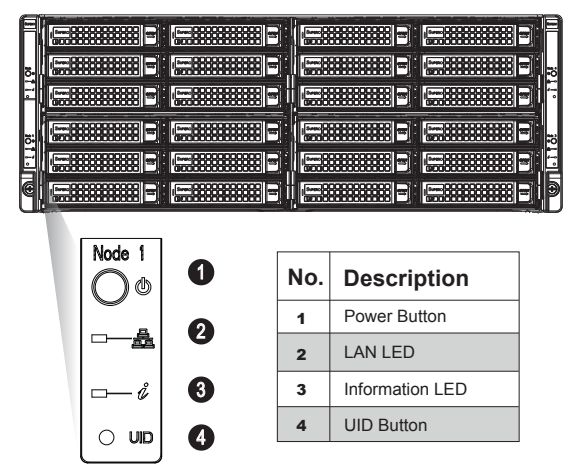


Rear View

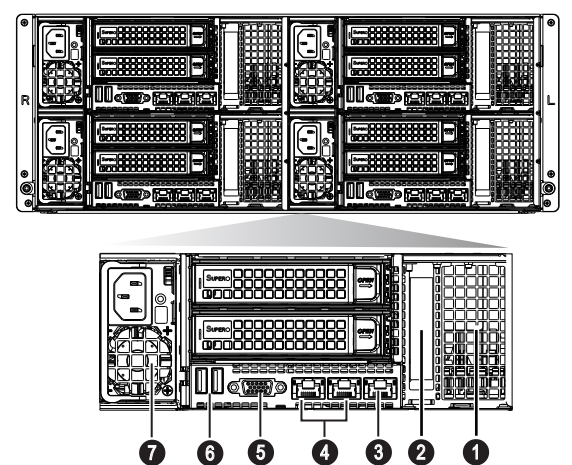


No.	Description
1	Micro-Low Profile Card
2	Low-Profile PCI-E Expansion Slot
3	Dedicated LAN for IPMI
4	GbE LAN1/LAN2 Ports
5	VGA Port
6	USB 0/1 Ports
7	Power Supply Module

Node Locations in the Chassis	
Node 2 Controls six front 3.5" HDDs, B1-B6 and two rear 3.5" HDDs B7-B8	Node 4 Controls six front 3.5" HDDs, D1-D6 and two rear 3.5" HDDs D7-D8
Node 1 Controls six front 3.5" HDDs, A1-A6 and two rear 3.5" HDDs A7-A8	Node 3 Controls six front 3.5" HDDs, C1-C6 and two rear 3.5" HDDs C7-C8

CPU Installation

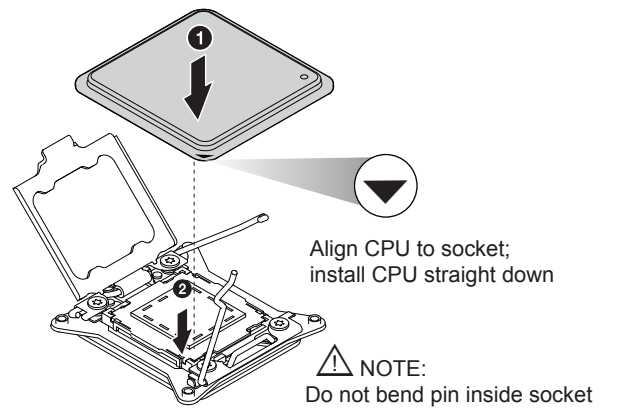

Heatsink Installation

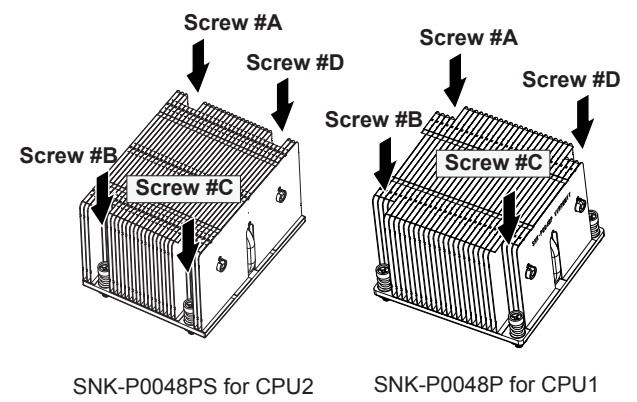

Caution

SAFETY INFORMATION
IMPORTANT: See installation instructions and safety warning before connecting system to power supply.
http://www.supermicro.com/about/policies/safety_information.cfm

WARNING:
To reduce risk of electric shock/damage to equipment, disconnect power from server by disconnecting all power cords from electrical outlets.
If any CPU socket empty, install protective plastic CPU cap

CAUTION:
Always be sure all power supplies for this system have the same power output. If mixed power supplies are installed, the system will not operate.

For more information go to :
<http://www.supermicro.com/support>

