




# AOC-UIBF-m1

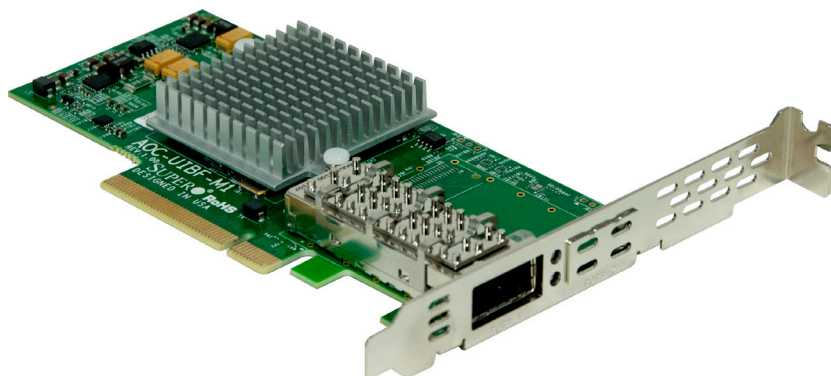

## User's Guide

Revision 1.0a

---

The information in this User's Guide has been carefully reviewed and is believed to be accurate. The vendor assumes no responsibility for any inaccuracies that may be contained in this document, and makes no commitment to update or to keep current the information in this user's guide, or to notify any person or organization of the updates. **Please Note: For the most up-to-date version of this user's guide, please see our Website at [www.supermicro.com](http://www.supermicro.com).**

Super Micro Computer, Inc. ("Supermicro") reserves the right to make changes to the product described in this user's guide at any time and without notice. This product, including software and documentation, is the property of Supermicro and/or its licensors, and is supplied only under a license. Any use or reproduction of this product is not allowed, except as expressly permitted by the terms of said license.

IN NO EVENT WILL SUPER MICRO COMPUTER, INC. BE LIABLE FOR DIRECT, INDIRECT, SPECIAL, INCIDENTAL, SPECULATIVE OR CONSEQUENTIAL DAMAGES ARISING FROM THE USE OR INABILITY TO USE THIS PRODUCT OR DOCUMENTATION, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN PARTICULAR, SUPER MICRO COMPUTER, INC. SHALL NOT HAVE LIABILITY FOR ANY HARDWARE, SOFTWARE, OR DATA STORED OR USED WITH THE PRODUCT, INCLUDING THE COSTS OF REPAIRING, REPLACING, INTEGRATING, INSTALLING OR RECOVERING SUCH HARDWARE, SOFTWARE, OR DATA.

---

Any disputes arising between the manufacturer and the customer shall be governed by the laws of Santa Clara County in the State of California, USA. The State of California, County of Santa Clara shall be the exclusive venue for the resolution of any such disputes. Supermicro's total liability for all claims will not exceed the price paid for the hardware product.

---

FCC Statement: This equipment has been tested and found to comply with the limits for a Class A digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the manufacturer's instruction manual, may cause harmful interference with radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case you will be required to correct the interference at your own expense.

---

California Best Management Practices Regulations for Perchlorate Materials: This Perchlorate warning applies only to products containing CR (Manganese Dioxide) Lithium coin cells. "Perchlorate Material-special handling may apply. See [www.dtsc.ca.gov/hazardouswaste/perchlorate](http://www.dtsc.ca.gov/hazardouswaste/perchlorate)".

**WARNING:** Handling of lead solder materials used in this product may expose you to lead, a chemical known to the State of California to cause birth defects and other reproductive harm.

---

User's Guide Revision 1.0a

Release Date: December 5, 2014

Unless you request and receive written permission from Super Micro Computer, Inc., you may not copy any part of this document.

Information in this document is subject to change without notice. Other products and companies referred to herein are trademarks or registered trademarks of their respective companies or mark holders.

Copyright © 2014 by Super Micro Computer, Inc.  
All rights reserved.

**Printed in the United States of America**

## Preface

### About this User's Guide

This user's guide is written for system integrators, PC technicians and knowledgeable PC users. It provides information for the installation and use of the AOC-UIBF-m1 add-on card.

### About this Add-on Card

The AOC-UIBF-m1 is the most compact, powerful InfiniBand adapter on the market. Based on the Mellanox ConnectX-3 with Virtual Protocol Interconnect (VPI), it provides the most high performance, flexible interconnect solution for servers used in enterprise data centers and high-performance computing. The AOC-UIBF-m1 simplifies system development by providing both InfiniBand (56Gb/s) and Ethernet (40Gb/s) support in one hardware design. The AOC-UIBF-m1 is designed to fit within Supermicro UIO server systems.

### An Important Note to the User

All images and layouts shown in this user's guide are based upon the latest PCB Revision available at the time of publishing. The card you have received may or may not look exactly the same as the graphics shown in this user's guide.

### Returning Merchandise for Service

A receipt or copy of your invoice marked with the date of purchase is required before any warranty service will be rendered. You can obtain service by calling your vendor for a Returned Merchandise Authorization (RMA) number. When returning the motherboard to the manufacturer, the RMA number should be prominently displayed on the outside of the shipping carton, and the shipping package is mailed prepaid or hand-carried. Shipping and handling charges will be applied for all orders that must be mailed when service is complete. For faster service, You can also request a RMA authorization online (<http://www.supermicro.com/RmaForm/>).

This warranty only covers normal consumer use and does not cover damages incurred in shipping or from failure due to the alternation, misuse, abuse or improper maintenance of products.

During the warranty period, contact your distributor first for any product problems.

## Conventions Used in the User's Guide

Pay special attention to the following symbols for proper system installation and to prevent damage to the system or injury to yourself:



**Warning:** Important information given to ensure proper system installation or to prevent damage to the components or injury to yourself.



**Note:** Additional information given to differentiate between various models or provides information for correct system setup.

**AOC-STGN-i2S**  
 1 - 2 3 4 - 5 6 7

Character	Representation	Options
1st	Product Family	<b>AOC:</b> Add On Card
2nd	Form Factor	<b>U:</b> UIO, <b>S:</b> Standard, <b>P:</b> Proprietary, <b>C:</b> MicroLP
3rd	Product Type/Speed	<b>G:</b> GbE (1Gb/s), <b>TG:</b> 10GbE (10Gb/s), <b>IBF:</b> IB FDR (56Gb/s) <b>IBQ:</b> IB QDR (40Gb/s), <b>INF:</b> InfiniBand DDR (20Gb/s)
4th	Chipset Model (Optional)	<b>N:</b> Niantec (82599ES), <b>P:</b> Ploverville (i350)
5th	Chipset Manufacturer	<b>i:</b> Intel, <b>m:</b> Mellanox
6th	Number of Ports	<b>1:</b> 1 port, <b>2:</b> 2 ports, <b>4:</b> 4 ports
7th	Connector Type (Optional)	<b>S:</b> SFP+, <b>T:</b> 10GBase-T

## SMC Networking Add-on Cards

Model	Type	Form Factor	Interface	Controller	Connection	Dimension (without Brackets) (H x L)
<b>SG-i2</b>	GbE	Standard LP	PCI-E x4	Intel® 82575EB	2 RJ45 (1Gb/port)	5.2" (13.2cm) x 2.5" (6.4cm)
<b>SG-i4</b>	GbE	Standard LP	PCI-E x8	Intel® 82576EB	4 RJ45 (1Gb/port)	5.8" (14.7cm) x 2.5" (6.4cm)
<b>SGP-i4</b>	GbE	Standard LP	PCI-E x4	Intel® i350	4 RJ45 (1Gb/port)	3.9" (9.9cm) x 2.5" (6.4cm)
<b>STG-i2T</b>	10GbE	Standard LP	PCI-E x8	Intel® X540	2 RJ45 (10Gb/port)	5.4" (13.7cm) x 2.5" (6.4cm)
<b>STGN-i2S</b>	10GbE	Standard LP	PCI-E x8	Intel® 82599ES	2 SFP+ (10Gb/port)	5.4" (13.7cm) x 2.5" (6.4cm)
<b>STG-i2</b>	10GbE	Standard LP	PCI-E x8	Intel® 82598EB	2 CX4 (10Gb/port)	5.6" (14.1cm) x 2.5" (6.4cm)
<b>PG-i2+</b>	GbE	Proprietary LP	PCI-E x4	Intel® 82576EB	2 RJ45 (1Gb/port)	3.8" (9.6cm) x 2.5" (6.4cm)
<b>UG-i4</b>	GbE	UIO FH	PCI-E x8	Intel® 82571EB	4 RJ45 (1Gb/port)	6.6" (16.7cm) x 3.9" (9.8cm)
<b>UTG-i2</b>	10GbE	UIO FH	PCI-E x8	Intel® 82598EB	2 CX4 (10Gb/port)	6.6" (16.7cm) x 3.9" (9.8cm)
<b>UIBF-m1</b>	FDR IB	UIO LP	PCI-E x8	Mellanox® ConnectX-3	1 QSFP (56Gb/port)	5.6" (14.0cm) x 2.5" (6.4cm)
<b>UINF-m2</b>	DDR IB	UIO LP	PCI-E x8	Mellanox® ConnectX-2	2 CX4 (20Gb/port)	5.5" (14.0cm) x 2.5" (6.4cm)
<b>UIBQ-m1</b>	QDR IB	UIO LP	PCI-E x8	Mellanox® ConnectX-2	1 QSFP (40Gb/port)	5.6" (14.3cm) x 2.5" (6.4cm)
<b>UIBQ-m2</b>	QDR IB	UIO LP	PCI-E x8	Mellanox® ConnectX-2	2 QSFP (40Gb/port)	5.6" (14.3cm) x 2.5" (6.4cm)
<b>CGP-i2</b>	GbE	MicroLP	PCI-E x4	Intel® i350	2 RJ45 (1Gb/port)	4.5" (11.3cm) x 1.3" (3.4cm)
<b>CG-i2</b>	GbE	MicroLP	PCI-E x4	Intel® 82580	2 RJ45 (1Gb/port)	4.5" (11.3cm) x 1.3" (3.4cm)
<b>CIBF-m1</b>	FDR IB	MicroLP	PCI-E x8	Mellanox® ConnectX-3	1 QSFP (56Gb/port)	4.5" (11.3cm) x 1.3" (3.4cm)
<b>CTG-i1S</b>	10GbE	MicroLP	PCI-E x8	Intel® 82599EN	1 SFP+ (10Gb/port)	4.5" (11.3cm) x 1.3" (3.4cm)

## Contacting Supermicro

### Headquarters

Address: Super Micro Computer, Inc.  
980 Rock Ave.  
San Jose, CA 95131 U.S.A.

Tel: +1 (408) 503-8000

Fax: +1 (408) 503-8008

Email: [marketing@supermicro.com](mailto:marketing@supermicro.com) (General Information)  
[support@supermicro.com](mailto:support@supermicro.com) (Technical Support)

Website: [www.supermicro.com](http://www.supermicro.com)

### Europe

Address: Super Micro Computer B.V.  
Het Sterrenbeeld 28, 5215 ML  
's-Hertogenbosch, The Netherlands

Tel: +31 (0) 73-6400390

Fax: +31 (0) 73-6416525

Email: [sales@supermicro.nl](mailto:sales@supermicro.nl) (General Information)  
[support@supermicro.nl](mailto:support@supermicro.nl) (Technical Support)  
[rma@supermicro.nl](mailto:rma@supermicro.nl) (Customer Support)

Website: [www.supermicro.nl](http://www.supermicro.nl)

### Asia-Pacific

Address: Super Micro Computer, Inc.  
3F, No. 150, Jian 1st Rd.  
Zhonghe Dist., New Taipei City 235  
Taiwan (R.O.C)

Tel: +886-(2) 8226-3990

Fax: +886-(2) 8226-3992

Email: [support@supermicro.com.tw](mailto:support@supermicro.com.tw)

Website: [www.supermicro.com.tw](http://www.supermicro.com.tw)

# Table of Contents

## ***Preface***

### ***Chapter 1 Overview***

1-1	Overview .....	1-1
1-2	Key Features .....	1-1
1-3	Specifications .....	1-1

### ***Chapter 2 Hardware Components***

2-1	Add-On Card Image and Layout .....	2-1
2-2	Major Components .....	2-1
2-3	Connectors: QSPF Port and LEDs .....	2-2
	QSPF Port .....	2-2
	QSPF Port LEDs .....	2-2

### ***Chapter 3 Installation***

3-1	Static-Sensitive Devices .....	3-1
	Precautions .....	3-1
	Unpacking .....	3-1
3-2	Before Installation .....	3-2
3-3	Installing the Add-on Card .....	3-2
3-4	Installing the Windows Operating System .....	3-3
3-5	Installing Drivers and Firmware .....	3-3
	Linux Drivers .....	3-3
	Windows Drivers .....	3-4
	Firmware Update Procedures .....	3-5

# Chapter 1

## Overview

### 1-1 Overview

Congratulations on purchasing your add-on card from an acknowledged leader in the industry. Supermicro products are designed with the utmost attention to detail to provide you with the highest standards in quality and performance. For product support and updates, please refer to our website at <http://www.supermicro.com/products/nfo/networking.cfm#adapter>.

### 1-2 Key Features

The key features of this add-on card include the following:

- Single QSFP (Quad Small Form Factor Pluggable) Connector
- Low-profile UIO Form Factor
- PCI Express 3.0 (up to 8GT/s)
- Virtual Protocol Interconnect (VPI)
- Up to 56Gbps InfiniBand or 40Gbps Ethernet
- CPU offload of transport operations
- Application offload
- GPU communication acceleration
- End-to-end QoS and congestion control
- Hardware-based I/O virtualization
- Ethernet encapsulation (EoIB)
- RoHS compliant 6/6

### 1-3 Specifications General

- Mellanox® ConnectX-3 FDR controller

- Compact size UIO form factor
- Single QSFP port
- PCI-E 3.0 x8 (8GT/s) interface

## **Connectivity**

- Interoperable with InfiniBand or 10/40GbE switches
- Passive copper cable with ESD protection
- Powered connectors for optical and active cable support

## **InfiniBand**

- IBTA Specification 1.2.1 compliant
- Hardware-based congestion control
- 16 million I/O channels
- 256 to 4Kbyte MTU, 1Gbyte messages

## **Enhanced InfiniBand**

- Hardware-based reliable transport
- Collective operations offloads
- GPU communication acceleration
- Hardware-based reliable multicast
- Extended Reliable Connected transport
- Enhanced Atomic operations

## **Ethernet**

- IEEE Std 802.3ae 10 Gigabit Ethernet



- IEEE Std 802.3ba 40 Gigabit Ethernet
- IEEE Std 802.3ad Link Aggregation and Failover
- IEEE Std 802.3az Energy Efficient Ethernet
- IEEE Std 802.1Q, .1p VLAN tags and priority
- IEEE Std 802.1Qau Congestion Notification
- IEEE P802.1Qaz D0.2 ETS
- IEEE P802.1Qbb D1.0 Priority-based Flow Control
- Jumbo frame support (9.6KB)

### **Hardware-based I/O Virtualization**

- Single Root IOV
- Address translation and protection
- Dedicated adapter resources
- Multiple queues per virtual machine
- Enhanced QoS for vNICs
- VMware NetQueue support

### **Manageability Features**

- RDMA over Converged Ethernet
- TCP/UDP/IP stateless offload
- Intelligent interrupt coalescence

### **Flexboot™ Technology**

- Remote boot over InfiniBand

- Remote boot over Ethernet
- Remote boot over iSCSI

## **Protocol Support**

- Open MPI, OSU MVAPICH, Intel MPI, MS MPI, PLATFORM MPI
- TCP,UDP, EoIB, IPoIB, SDP, RDS
- SRP, iSER, NFS RDMA
- uDAPL

## **Operating Systems/Distributions**

- Novell SLES, Red Hat Enterprise Linux (RHEL), and other Linux distributions
- Microsoft Windows Server 2008/CCS 2003, HPC Server 2008
- OpenFabrics Enterprise Distribution (OFED)
- OpenFabrics Windows Distribution (WinOF)
- VMware ESX Server 3.5, vSphere 4.0/4.1

## **Physical Dimensions**

- Card PCB dimensions (without end brackets): 14.29cm (5.63in) x 6.35cm (2.50in) (LxW)
- Height of end brackets: Standard - 12cm (4.73in), Low Profile - 7.94cm (3.13in)

## **Operating Condition**

- Operating temperature: 0°C to 55°C (32°F to 131°F)

## **Compliance/Environmental**

- RoHS Compliant 6/6, Pb Free



## **Supported Platforms**

- Supermicro UIO Server Systems with UIO slot


# Notes

## Chapter 2


### Hardware Components

#### 2-1 Add-On Card Image and Layout

The AOC-UIBF-m1 Image

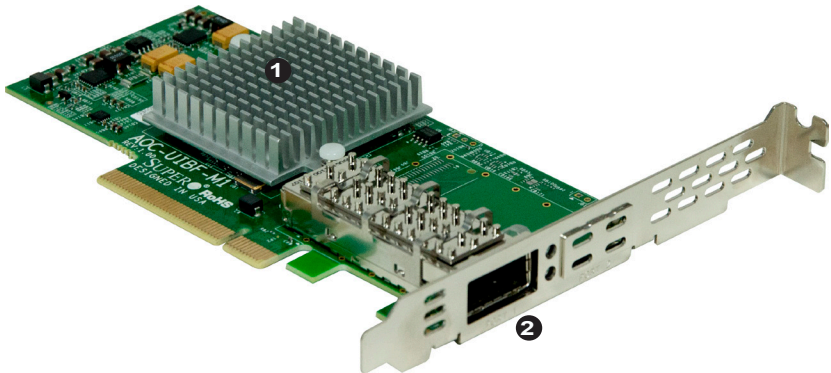

The AOC-UIBF-m1 Layout

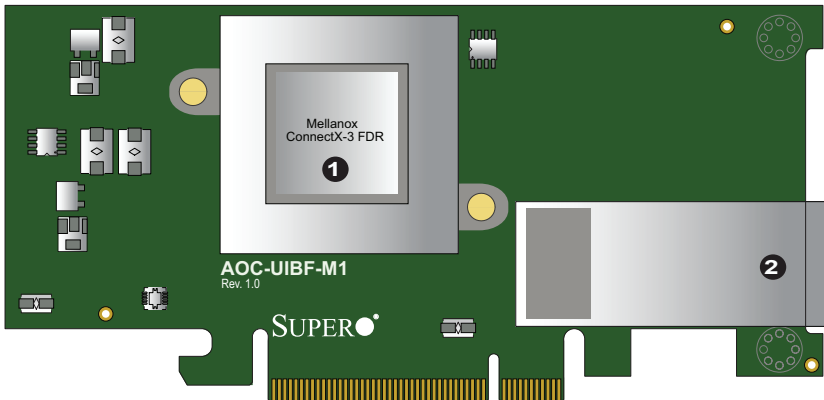

#### 2-2 Major Components


The following major components are installed on the AOC-UIBF-m1:

1. Mellanox ConnectX-3 FDR Controller
2. QSFP (Quad Small Form Factor Pluggable) Port

## 2-3 Connectors: QSFP Port and LEDs


### QSFP Port

A single QSFP port is located on the add-on card. Connect a QSFP cable to the port to provide Infiniband (56Gb/s) and Ethernet (40Gbp/s) communication. Refer to the add-on card layout on Page 2-1 for the location of the QSFP port.



### QSFP Port LEDs

Two LEDs are located to the right of the QSFP port. A blinking yellow LED on the top indicates activity. A solid green, yellow or off LED on the bottom indicates the type of link-up connection. See the table to the right for more information.



QSFP Port LEDs		
LED	Color	Definition
Activity	Yellow (Blinking)	Port activity
Link	Yellow	Logical Link-up
	Green	Physical Link-up
	Off	No Connection

## Chapter 3

### Installation

#### 3-1 Static-Sensitive Devices

Electrostatic Discharge (ESD) can damage electronic components. To avoid damaging your add-on card, it is important to handle it very carefully. The following measures are generally sufficient to protect your equipment from ESD.

##### Precautions

- Use a grounded wrist strap designed to prevent static discharge.
- Touch a grounded metal object before removing the add-on card from the antistatic bag.
- Handle the add-on card by its edges only; do not touch its components, or peripheral chips.
- Put the add-on card back into the antistatic bags when not in use.
- For grounding purposes, make sure that your system chassis provides excellent conductivity between the power supply, the case, the mounting fasteners and the add-on card.

##### Unpacking

The add-on card is shipped in antistatic packaging to avoid static damage. When unpacking your component or your system, make sure that the person handling it is static protected.



**Warning:** To avoid damaging your components and to ensure proper installation, be sure to always connect the power cord last, and always remove it before adding, removing or changing any hardware components.

## **3-2 Before Installation**

To install the add-on card properly, be sure to follow the instructions below.

1. Power down the system.
2. Remove the power cord from the wall socket.
3. Use industry standard anti-static equipment (such as gloves or wrist strap) and follow the instructions listed on Page 3-1 to avoid damage caused by ESD.
4. Familiarize yourself with the server, motherboard, and/or chassis documentation.
5. Confirm that your operating system includes the latest updates and hotfixes.

## **3-3 Installing the Add-on Card**

Follow the steps below to install the add-on card into your system.

1. Remove the server cover and, if necessary, set aside any screws for later use.
2. Remove the add-on card slot cover. If the case requires a screw, place the screw aside for later use.
3. Position the add-on card in the slot directly over the connector, and gently push down on both sides of the card until it slides into the PCI connector.
4. Secure the add-on card to the chassis. If required, use the screw that you previously removed.
5. Attach any necessary external cables to the add-on card.
6. Replace the chassis cover.
7. Plug the power cord into the wall socket, and power up the system.



### 3-4 Installing the Windows Operating System

Follow the steps below to install the drivers needed for your Windows OS support. The controller comes with a driver on the CD-ROM CDR-NIC.

1. Run the CDR-NIC. (If you do not have a product CD-ROM, download drivers from the Supermicro Support Website and then transfer them to your system.)
2. When the SUPERMICRO window appears, click on the computer icon next to the product model.

 **Note:** If the *FOUND NEW HARDWARE WIZARD* screen displays on your system, click CANCEL.



3. Click on INSTALL DRIVERS AND SOFTWARE.
4. Follow the prompts to complete the installation.

### 3-5 Installing Drivers and Firmware

Use the procedures below to install both drivers and firmware for the AOC-UIBF-m1 add-on card for both Linux and Windows.

#### Linux Drivers

Use the following procedures for installing AOC-UIBF-m1 drivers for the Linux operating system.

#### *Installing InfiniBand Drivers for the Linux Operating System*

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > InfiniBand > Linux.

2. Choose the *InfiniBand Linux* driver package file.
3. Install the driver by entering the following commands:

```
tar xzvf OFED-<ver>.tgz  
cd OFED-<ver>  
./install.pl
```

This installs the Linux drivers to your system.

### ***Installing 10G Drivers for the Linux Operating System***

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > ConnectX\_EN > Linux.
2. Choose the *10G Linux* driver package file.
3. Install the driver by entering the following commands:

```
tar xzvf mlnx_en-<ver>.tgz  
cd mlnx_en-<ver>  
./install.sh
```

This installs the 10G drivers to your system.

## **Windows Drivers**

Use the following procedures for installing AOC-UIBF-m1 add-on card drivers for the Windows operating system.

### ***Installing InfiniBand Drivers for the Windows Operating System***

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > InfiniBand > Windows.
2. Choose the desired InfiniBand Windows driver package file.
3. Double-click to run and install the driver package file.

### ***Installing 10G Drivers for the Windows Operating System***

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > ConnectX\_EN > Windows.
2. Choose the desired 10G Windows driver package file.
3. Double-click to run and install the driver package file.

### **Firmware Update Procedures**

Use the following procedures for updating the AOC-UIBF-m1 add-on card firmware for both the Linux and Windows operating systems.

#### ***Updating Firmware for the Linux Operating System***

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > Firmware\_Tool > Linux.
2. Choose the *MFT Linux* package file and untar the package file.
3. Install the package by entering the following command:

```
cd mft-<ver>
./install.sh
```

4. Install the firmware by the following commands:

```
mst start

mst status    *write down the pci_cr0 device name*

flint -d <pci_cr0 device name> -i <firmware file name>.bin b
```

#### ***Updating Firmware for the Windows Operating System***

1. From the CDR-NIC LAN driver CD or FTP site, go to the following directory:  
Mellanox > Firmware\_Tool > Windows
2. Choose the desired MFT Windows package file.
3. Double-click to run and install the MFT package file.

4. Open the DOS command prompt and locate the MFT folder.
5. Install the firmware by entering the following commands:

```
mst start
```

```
mst status    *write down the pci_cr0 device name*
```

```
flint -d <pci_cr0 device name> -i <firmware file name>.bin b
```

(Disclaimer Continued)

The products sold by Supermicro are not intended for and will not be used in life support systems, medical equipment, nuclear facilities or systems, aircraft, aircraft devices, aircraft/emergency communication devices or other critical systems whose failure to perform be reasonably expected to result in significant injury or loss of life or catastrophic property damage. Accordingly, Supermicro disclaims any and all liability, and should buyer use or sell such products for use in such ultra-hazardous applications, it does so entirely at its own risk. Furthermore, buyer agrees to fully indemnify, defend and hold Supermicro harmless for and against any and all claims, demands, actions, litigation, and proceedings of any kind arising out of or related to such ultra-hazardous use or sale.