

# MegaDC SuperServer SSG-610P-ACR12N4L

1U internal-mounted storage server with 12 3.5" SAS/SATA + 4 EDSFF short + 2 2.5" 7mm bays and PCIe 4.0



More details here

## Key Applications


Database Applications, Hyperscale Data Center, Object Storage, Big Data Analytics, Scale-Out Density, Hadoop & Ceph storage solutions, Scale-out NAS,

## Key Features

- Up to 4TB ECC DDR4-3200: LRDIMM/RDIMM;
- 2x 25G SFP+ Ports Onboard;
- 12x 3.5" hot-swap SAS/SATA, 4x hot-swap E1.S (EDSFF Short) drive bays, 2x 2.5" 7mm NVMe/SATA drive bays;
- Host Bus Adapter via Broadcom® 3224;
- PCIe 4.0 x16 AIOM Support + 3 PCIe 4.0 LP Slots;



<b>Form Factor</b>	1U Rackmount Enclosure: 447.04 x 43.18 x 939.8mm (17.6" x 1.7" x 37") Package: 685.8 x 304.8 x 1350.01mm (27" x 12" x 53.15")
<b>Processor</b>	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 38C/76T; Up to 57MB Cache per CPU
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM
<b>Drive Bays Configuration</b>	Default: Total 16 bays <ul style="list-style-type: none"> <li>• 12 internal hot-swap 3.5" SAS/SATA drive bays</li> <li>• 4 front hot-swap E1.S NVMe drive bays</li> </ul> M.2: 2 M.2 NVMe/SATA slots (M-key)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 2 PCIe 4.0 x16 LP slots</li> <li>• 1 PCIe 4.0 x8 LP slot</li> <li>• 1 PCIe 4.0 x16 AIOM slot (OCP 3.0 compatible)</li> </ul>
<b>On-Board Devices</b>	2 SFP28 25GbE with Mellanox®
<b>Input / Output</b>	LAN: 2 SFP28 25 GbE LAN ports 1 RJ45 1 GBASE-T Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) 2 USB 2.0 ports(front) Video: 1 VGA port Serial: 1 port

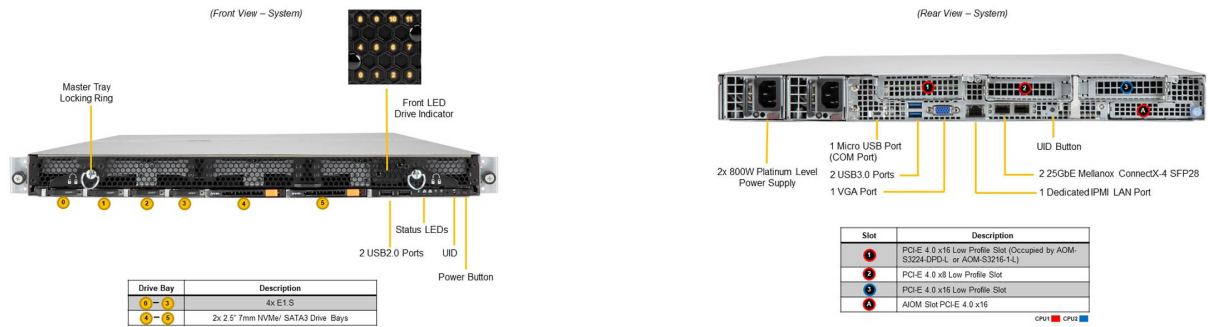

System Cooling	Fans: Up to 6 Heavy Duty 4cm Fan(s)
Power Supply	2x 800W Redundant (1 + 1) Platinum Level (94%) power supplies
System BIOS	BIOS Type: AMI 128MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 4+1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 58 lbs (26.3 kg) Net Weight: 39.5 lbs (17.9 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	<b><u><a href="#">Super X12DPD-A6M25</a></u></b>
Chassis	<b>CSE-802ETS-R804AMP</b>