

# Storage SuperServer SSG-640SP-E1CR90

4U top-loading storage server with 90 hot-swap 3.5" SAS/SATA bays and PCIe 4.0



More details here

## Key Applications



Big Data & Analytics, Data Lake, HPC and AI/ML Workloads, Telco & Cloud Service Providers, Financial Services & Healthcare Image Archives, Content Repositories, Government Data Protection,

## Key Features

- Dual socket 3rd Gen Intel® Xeon® Scalable processors, up to 72 Cores;
- 16 ECC DDR4-3200: LRDIMM/RDIMM;
- 3 x PCIe 4.0 x16 HHHL PCIe slots;
- 90 3.5"/2.5" Hot-swap SAS3/SATA3 drives, 2x Fixed slim SATA SSD, 2x NVMe M.2 (form factor: 2280 and 22110);
- 6 x 8cm hot-swap counter-rotate redundant PWM cooling fans;
- 2600W Redundant Power Supplies Titanium Level (96%);
- Server remote management: IPMI 2.0 / KVM over LAN / Media over LAN Drive Controller support via Broadcom® 3916 or 3616;



<b>Form Factor</b>	4U Rackmount Enclosure: 447 x 177 x 1099mm (17.6" x 6.96" x 43.3")
<b>Processor</b>	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 36C/72T; Up to 54MB Cache per CPU
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM
<b>Drive Bays Configuration</b>	Default: Total 96 bays <ul style="list-style-type: none"> <li>• 2 rear hot-swap 2.5" SATA drive bays</li> <li>• 4 rear hot-swap 2.5" NVMe* drive bays</li> <li>• 90 top-loading hot-swap 3.5"/2.5" SAS/SATA drive bays</li> </ul> (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 NVMe slots (M-key)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 3 PCIe 4.0 x16 LP slots</li> </ul>
<b>On-Board Devices</b>	2 RJ45 10GBASE-T
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GBASE-T LAN ports USB: 2 USB 3.0 ports(rear) Video: 1 VGA port DOM: 2 SuperDOM (Disk on Module) ports

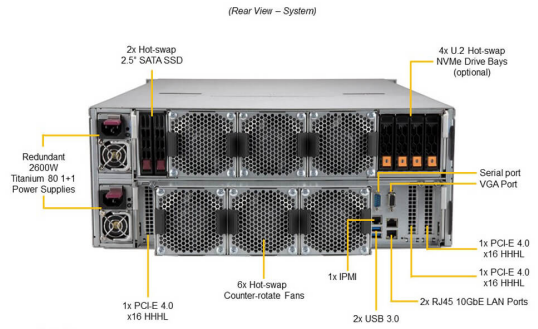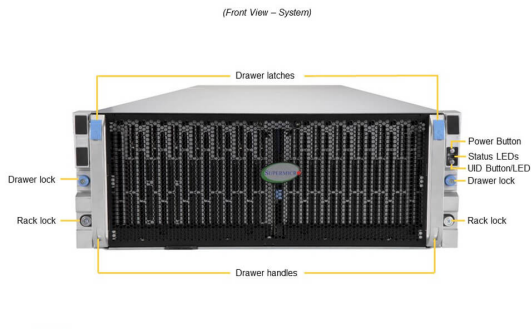

System Cooling	Fans: Up to 6 Heavy Duty 8cm Fan(s) Air Shroud: 1 Air Shroud
Power Supply	2x 2600W Redundant Titanium Level (96%) Hot-plug power supplies
System BIOS	BIOS Type: AMI 128MB SPI Flash EEPROM
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 4+1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 225 lbs (102.06 kg) Net Weight: 130 lbs (58.97 kg) Available Color: N/A
Operating Environment	RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	<a href="#">Super X12DSC-6</a>
Chassis	CSE-947HTS-R2K63P