

IoT SuperServer SYS-E302-12D-8C

Embedded Mini-ITX Fanless Box with Intel Xeon D processor



More details here

Key Applications

IoT Gateway, Embedded Networking Applications, Industrial Automation, Retail, Artificial Intelligence, Machine Learning (ML), Networking Security Appliance, SD-WAN,

Key Features

- Wall Mount Bracket;
- Intel® Ice Lake Xeon D-1736NT 15MB 8 Cores 2.7GHz QAT 20G, 67W;
- Up to DDR4 2933MHz 256GB RDIMM or 128GB RDIMM;
- 6 Networking Interface (2 x25G SFP28, 4 x 1GbE)
 - 1 Dedicated IPMI LAN;
- 1x 2.5" SATA drives and 1x M.2 M-Key 2280;
- Fanless Cooling
 - Operating Temperature: 0°C to 35°C (32°F to 95°F);
- 180W 12V Lockable DC Power Adapter;




Form Factor	Fanless Embedded Enclosure: 295 x 76 x 206mm (11.6" x 3" x 8.1") Package: 418 x 305 x 194mm (16.45" x 12" x 7.6")
Processor	Single FCBGA-2227 Intel® Xeon® Processor D-1736NT Up to 8C/16T; Up to 15MB Cache
System Memory	Slot Count: 4 DIMM slots Max Memory (2DPC): Up to 256GB 2933MT/s ECC DDR4 RDIMM
Drive Bays Configuration	Default: Total 1 bay <ul style="list-style-type: none"> • 1 internal fixed 2.5" NVMe/SATA drive bay M.2: 1 M.2 PCIe 3.0 x4 NVMe/SATA slot (M-key 2280)
Expansion Slots	1 M.2 PCIe 3.0 x1 NVMe slot (E-key 2230) 1 M.2 PCIe 3.0 x2 NVMe/SATA slot (B-key 2280/3042/3052)
On-Board Devices	4 RJ45 1GBASE-T 2 SFP28 25GbE
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 SFP28 25 GbE LAN ports 4 RJ45 1 GbE LAN ports USB: 2 USB 3.0 ports Video: 1 VGA port

(Front View – System)



(Rear View – System)

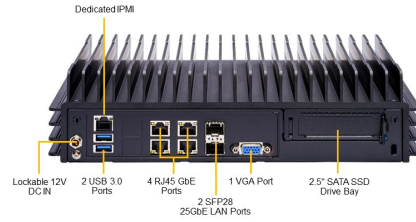

System Cooling	Fans: N/A
Power Supply	1x 180W power supply
System BIOS	<p>BIOS Type: AMI 32MB UEFI</p> <p>BIOS Features: ACPI 6.3</p> <p>UEFI 2.7</p> <p>SMBIOS 3.3</p> <p>PCI FW 3.0</p>
Management	<p>SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!</p>
Dimensions and Weight	<p>Weight: Gross Weight: 12 lbs (5.44 kg)</p> <p>Net Weight: 8 lbs (3.63 kg)</p> <p>Available Color: Black</p>
Operating Environment	<p>Operating Temperature: 0°C to 35°C (32°F to 95°F)</p> <p>Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)</p> <p>Operating Relative Humidity: 8% to 90% (non-condensing)</p> <p>Non-operating Relative Humidity: 5% to 95% (non-condensing)</p>
Motherboard	<u>Super X12SDV-8C-SP6F-01</u>
Chassis	CSE-E302iL