

# WIO A+ Server AS -1115SV-WTNRT

1U UP WIO with 10 hot-swap 2.5" NVMe/SAS/SATA (6 NVMe hybrid) bays and 3 PCIe 5.0 x16 slots



More details here

## Key Applications

Virtualization, Data Center Optimized, Firewall Applications, Database/Storage, Edge/Cloud Computing Services,


## Key Features

- Single Socket AMD EPYC™ 8004 Series Processor;
- 6 DIMM slots, DDR5-4800MHz memory, support up to 768GB;
- 2 PCIe 5.0 x16 FHFL; 1 PCIe 5.0 x16 LP;
- Single dedicated IPMI LAN, dual 10GbE BaseT LAN ports via Broadcom BCM57416 Controller;
- 10 Hot-swap 2.5" SATA(default)/NVMe/SAS drive bays or 6 SATA/NVMe hybrid + 4 SATA drive bays (optional cables or SAS controller card for NVMe and SAS drive bays);
- Dual 860W Redundant Titanium Level power supplies (Power supply full redundancy based on configuration and application load);




Form Factor	1U Enclosure: 437 x 43 x 597mm (17.2" x 1.7" x 23.5") Package: 597 x 197 x 800mm (23.5" x 7.75" x 31.5")
Processor	Single processor(s) AMD EPYC™ 8004 Series Processor Up to 64C/128T
GPU	Max GPU Count: Up to 1 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: L40, L4, A2
System Memory	Slot Count: 6 DIMM slots Max Memory (1DPC): Up to 768GB 4800MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 10 bays <ul style="list-style-type: none"> <li>• 10 front hot-swap 2.5" NVMe*/SAS*/SATA drive bays (*NVMe/SAS support may require additional storage controller and/or cables)</li> <li>• M.2: 2 M.2 PCIe 3.0 x4 NVMe slots (M-key 2280/22110)</li> </ul>
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 2 PCIe 5.0 x16 FHFL slots</li> <li>• 1 PCIe 5.0 x16 LP slot</li> </ul>
On-Board Devices	Chipset: System on Chip Network Connectivity: 2 RJ45 10GBASE-T with Broadcom® BCM57416
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GBASE-T LAN ports USB: 2 ports(front) 4 ports(rear) Video: 1 VGA port Serial: 1 COM port(Rear) TPM: 1 TPM Onboard/port 80

(Front View – System)

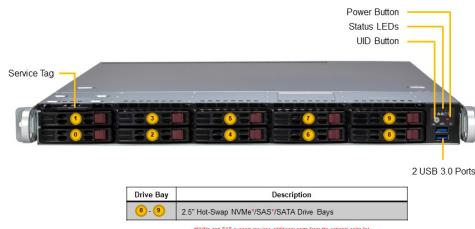

(Rear View – System)

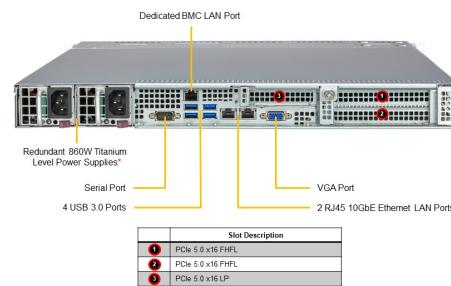**System Cooling**

Fans: Up to 6 Heavy duty counter-rotating 40x40x56mm Fan(s)  
 Air Shroud: 1 Air Shroud

**Power Supply**

2x 860W Redundant (1 + 1) Titanium Level (96%) power supplies

**System BIOS**

BIOS Type: AMI 32MB SPI Flash EEPROM  
 BIOS Features: ACPI 6.4  
 Plug and Play (PnP)  
 SMBIOS 3.5 or later  
 UEFI 2.8  
 USB Keyboard support

**Management**

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

**PC Health Monitoring**

FAN: Fans with tachometer monitoring  
 Status monitor for speed control  
 Pulse Width Modulated (PWM) fan connectors  
 Temperature: Monitoring for CPU and chassis environment  
 Thermal Control for fan connectors

**Dimensions and Weight**

Weight: Gross Weight: 33.5 lbs (15.2 kg)  
 Net Weight: 21 lbs (9.53 kg)  
 Available Color: Black

**Operating Environment**

Operating Temperature: 10°C to 35°C (50°F to 95°F)  
 Non-operating Temperature: -30°C to 60°C (-22°F to 140°F)  
 Operating Relative Humidity: 8% to 80% (non-condensing)  
 Non-operating Relative Humidity: 8% to 90% (non-condensing)

**Motherboard**

[Super H13SVW-NT](#)

**Chassis**

[CSE-116BTS-R000WNP](#)