

Storage SuperServer SSG-542B-DE1CR90-01-G2



4U 2-node top-loading storage server with 90 hot-swap 3.5" SAS/SATA bays and PCIe 5.0

Key Applications

Cloud-Scale Object Storage


Gold Configuration Details

- CPU: 1x Intel® Xeon® 6736P (36C/2GHz) per node
- Memory: 512GB DDR5-5200 per node
- Storage: 45x 24TB 3.5" SATA HDD per node
- M.2: 2x 960GB M.2 NVMe SSD per node
- NIC: 1x NVIDIA® ConnectX®-6 VPI dual 200G QSFP56 per node
- NIC: 1x dual 1GbE RJ45 per node
- Power: 2x 2600W Titanium Level
- Storage Controller: Broadcom® 3816 HBA



Base System Specs

Form Factor	4U Rackmount Enclosure: 447 x 177 x 1099mm (17.6" x 6.96" x 43.3")
Processor	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 86C/144T; Up to 108MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM
Drive Bays Configuration	(*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
Expansion Slots	2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
On-Board Devices	NVMe: NVMe; RAID 0/1 support Network Connectivity: No NIC option supported
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

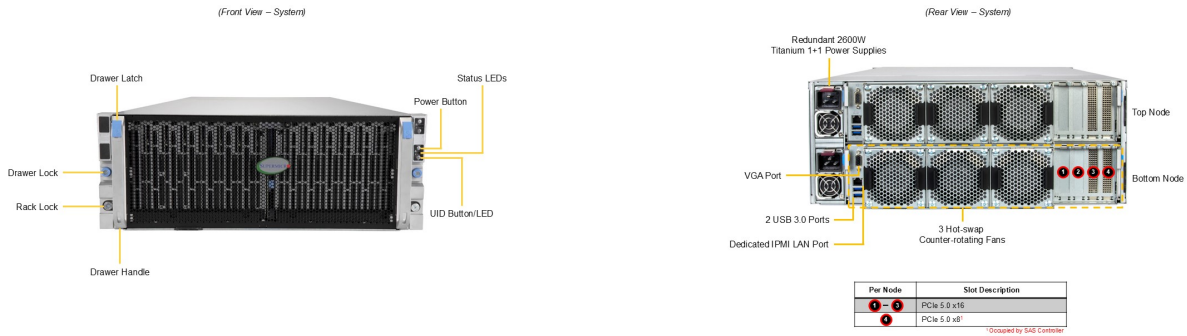

System Cooling	Fans: Up to 1 Counter Rotating 6cm Fan(s) Up to 6 Heavy Duty 8cm Fan(s)
Power Supply	2x 2600W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer® (SCC); Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory Fan: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 225 lbs (102.06 kg) Net Weight: 130 lbs (58.97 kg) Available Color: N/A
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	Super X14SBSC
Chassis	CSE-947HTS-R2K63P