

# Storage SuperServer SSG-542B-E1CR90

4U top-loading storage server with 90 hot-swap 3.5" SAS/SATA bays and PCIe 5.0



## Key Applications



Big Data & Analytics, Data Lake, HPC and AI/ML Workloads, Telco & Cloud Service Providers, Financial Services & Healthcare Image Archives, Content Repositories, Government Data Protection,

## Key Features

- Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores, Single Socket LGA-4710 (Socket E2) supported, CPU TDP supports Up to 350W TDP;
- Up to 16 DIMMs supporting up to 2TB DDR5-6400 in 1DPC or 2TB DDR5-5200 in 2DPC;
- Up to 1 PCIe 5.0 x8 HHHL + 3 PCIe 5.0 x16 HHHL slots;
- Up to 90 top-loading hot-swap 3.5"/2.5" SAS/SATA + 4 rear hot-swap 2.5" NVMe + 2 internal fixed 2.5" NVMe drive bays;
- 2 Redundant 2600W Titanium Level power supplies;
- 4U Rackmount chassis;



<b>Form Factor</b>	4U Rackmount Enclosure: 447 x 177 x 1099mm (17.6" x 6.96" x 43.3")
<b>Processor</b>	Single Socket E2 (LGA-4710) Intel® Xeon® 6700/6500 series processors with P-cores or 6700 series processors with E-cores P-cores: Up to 144C/144T; Up to 108MB Cache E-cores: Up to 144C/144T; Up to 108MB Cache
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 2TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 2TB 5200MT/s ECC DDR5 RDIMM
<b>Drive Bays Configuration</b>	Default: Total 90 bays <ul style="list-style-type: none"> <li>• 90 top-loading hot-swap 3.5"/2.5" SAS/SATA drive bays</li> </ul> Option A: Total 4 bays <ul style="list-style-type: none"> <li>• 4 rear hot-swap 2.5" PCIe 5.0 x4 NVMe* drive bays</li> </ul> Option B: Total 2 bays <ul style="list-style-type: none"> <li>• 2 internal fixed 2.5" PCIe 5.0 x4 NVMe* drive bays</li> </ul> (*NVMe support may require additional storage controller and/or cables, please see the optional parts list for details) M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
<b>Expansion Slots</b>	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> <li>• 1 PCIe 5.0 x8 (in x8) HHHL slot</li> <li>• 3 PCIe 5.0 x16 (in x16) HHHL slots</li> </ul> M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 2280/22110)
<b>On-Board Devices</b>	NVMe: NVMe; RAID 0/1 support Network Connectivity: No NIC option supported
<b>Input / Output</b>	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports(rear) Video: 1 VGA port

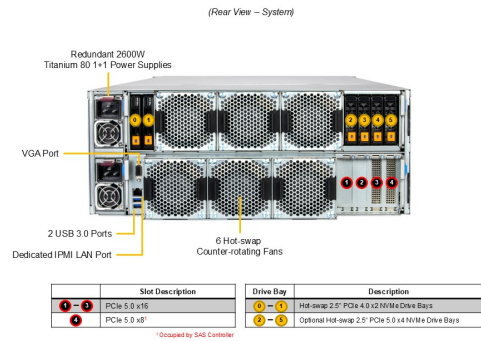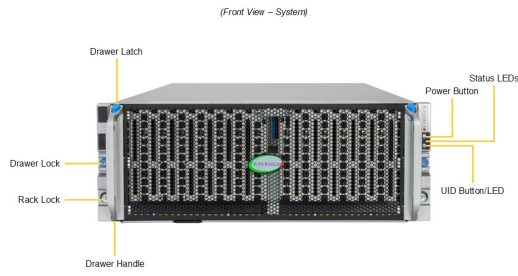

System Cooling	Fans: Up to 1 Counter Rotating 6cm Fan(s) Up to 6 Heavy Duty 8cm Fan(s)
Power Supply	2x 2600W Redundant (1 + 1) Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 64MB SPI Flash
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 225 lbs (102.06 kg) Net Weight: 130 lbs (58.97 kg) Available Color: N/A
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><b>Super X14SBSC</b></a>
Chassis	<b>CSE-947HTS-R2K63P</b>