

# AI Training SuperServer SYS-420GH-TNGR

4U GPU server supporting up to 8 double-width GPUs + 4 hot-swap 2.5" NVMe/SAS/SATA drives



More details here

## Key Applications


Computer Vision, Natural Language Processing, Recommendation, Purpose  
Built for AI/Deep Learning Training,

## Key Features

- Dual Intel® Xeon® Scalable Processors (Ice Lake) TDP up to 270W;
- Intel® C621A Chipset;
- 32x DIMM slots, up to 8TB Registered ECC DDR4 3200MHz SDRAM;
- 1x PCIe 4.0 x16 FHHL slot plus 2x PCIe 4.0 AIOM (OCP 3.0 superset) slots;
- 24x on-board 100GbE (via 6x QSFP-DDs) for scale-out and 1x 10GbE BaseT (dedicated IPMI port);
- 4x 2.5" SAS/SATA/NVMe Hybrid Hot-Swap Bays;
- 5x Removable Heavy-Duty Fan(s);
- 4x 3000W(54V+12V)/2000W(12V) redundant, Titanium Level power supplies;



Form Factor	4U Rackmount Enclosure: 447 x 178 x 813mm (17.6" x 7" x 32") Package: 693.4 x 381 x 1254.8mm (27.3" x 15" x 49.4")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T
GPU	Up to 8 double-width GPUs
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 RDIMM/LRDIMM
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 2.5" NVMe/SAS/SATA drive bays</li> </ul> M.2: 2 M.2 NVMe slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 1 PCIe 4.0 x16 FHFL slot</li> <li>• 2 PCIe 4.0 x16 AIOM slots (OCP 3.0 compatible)</li> </ul>
On-Board Devices	6 QSFP-DD 400GbE 1 RJ45 10GbE
Input / Output	LAN: 1 RJ45 1 GbE LAN port USB: 2 USB 3.0 ports Video: 1 VGA port

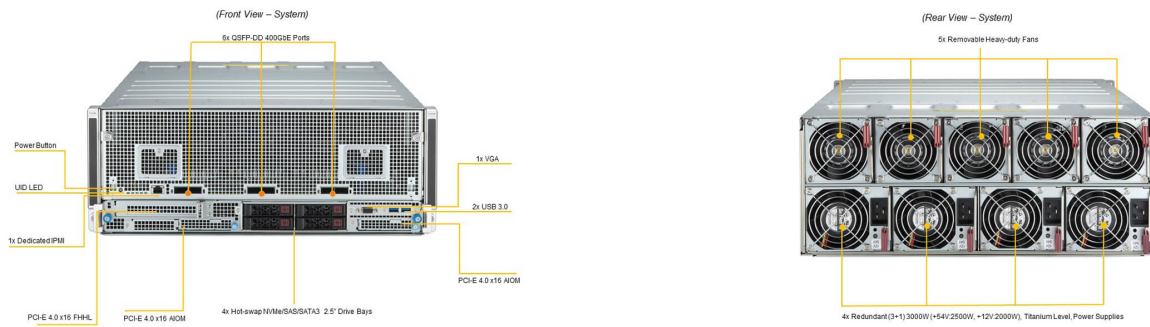

System Cooling	Fans: Up to 5 Removable Heavy-Duty 84x203.5x82.4mm Fan(s)
Power Supply	1x 3000W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: 7+1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 137 lbs (62 kg) Available Color: Silver
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#"><b>Super X12DPG-U6</b></a>
Chassis	<b>CSE-428G2</b>