

GPU SuperServer SYS-420GP-TNAR+

DP Intel System with NVIDIA HGX A100 8-GPU and 3000W Power Supplies



More details here

Key Applications

High Performance Computing, AI/Deep Learning Training,

Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- Intel® C621A Chipset;
- 32 DIMM Slots; Up to 8TB DRAM; Up to 8TB Intel® Optane™ Persistent Memory (up to 12TB with DRAM); 3200/2933/2666 ECC DDR4 LRDIMM; Intel® Optane™ Persistent Memory 200 series;
- AIOM/OCP 3.0 Support
- 10 PCIe Gen 4.0 x16 LP Slots;
- Flexible networking options;
- 6x 2.5" Hot-swap NVMe/SATA/SAS drive bays
- 2 M.2 NVMe and SATA for boot drive only;
- 4 heavy duty fans with optimal fan speed control;
- 4x 3000W redundant Titanium level power supplies;




Form Factor	4U Rackmount Enclosure: 446 x 174 x 900mm (17.6" x 6.9" x 35.4") Package: 695 x 750 x 1140mm (27.4" x 29.5" x 44.9")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU
GPU	Max GPU Count: 8 onboard GPUs Supported GPU: NVIDIA SXM: HGX A100 8-GPU (80GB) CPU-GPU Interconnect: PCIe 4.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: NVIDIA® NVLink™ with NVSwitch™
System Memory	Slot Count: 32 DIMM slots Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
Drive Bays Configuration	Default: Total 6 bays <ul style="list-style-type: none"> • 6 front hot-swap 2.5" NVMe/SAS/SATA drive bays M.2: 2 M.2 NVMe/SATA slots (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> • 10 PCIe 4.0 x16 LP slots
On-Board Devices	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GbE with Intel® X550-AT2 (optional)
Input / Output	1 VGA port

(Front View – System)



(Rear View – System)

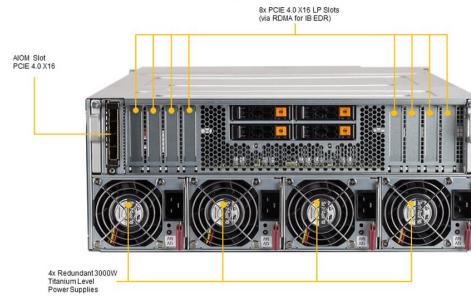

System Cooling

Fans: Up to 4 heavy duty fans with optimal fan speed control

Power Supply

1x 3000W Redundant Titanium Level (96%) power supply

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

Dimensions and Weight

Weight: Gross Weight: 225 lbs (102.1 kg)

Net Weight: 166 lbs (75.3 kg)

Available Color: Black Front & Silver Body

Operating Environment

Operating Temperature: 10°C to 35°C (50°F to 95°F)

Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)

Operating Relative Humidity: 8% to 90% (non-condensing)

Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

[Super X12DGO-6](#)

Chassis

CSE-438G