

Mainstream SuperServer SYS-621P-TR

2U Mainstream with 6 PCIe 5.0 slots and dual 1GbE LAN



More details here

Key Applications


Virtualization, Enterprise Server, Application and data serving, Compute Intensive Applications,

Key Features

- Dual Socket E (LGA-4677) 5th/4th Gen Intel® Xeon® Scalable processors, supports up to 300W TDP;
- 16 DIMM slots, Up to 4TB DDR5-5600MHz/4800MHz ECC Registered RDIMM;
- 4 PCIe 5.0 x16 Low Profile (LP), 2 PCIe 5.0 x8 Low Profile (LP);
- 1200W Redundant Titanium level Power Supplies;



Form Factor	2U Rackmount Enclosure: 437 x 89 x 647mm (17.2" x 3.5" x 25.5") Package: 678 x 290 x 876mm (26.7" x 11.4" x 34.5")
Processor	Dual Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors
System Memory	Slot Count: 16 DIMM slots Max Memory (1DPC): Up to 4TB 5600MT/s ECC DDR5 RDIMM
Drive Bays Configuration	Default: Total 8 bays <ul style="list-style-type: none">• 4 front hot-swap 3.5" NVMe*/SAS*/SATA drive bays• 4 front hot-swap 3.5" SAS*/SATA drive bays (*NVMe/SAS support may require additional storage controller and/or cables) M.2: 2 M.2 NVMe slots (M-key) Peripheral Bays: 1 slim DVD bay (optional)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none">• 2 PCIe 5.0 x8 LP slots• 4 PCIe 5.0 x16 LP slots M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key)
On-Board Devices	SATA: SATA (6Gbps) Chipset: Intel® C741 Network Connectivity: 2 RJ45 1GbE
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 2.0 ports(front) 4 USB 3.0 ports(rear) Video: 1 VGA port Serial: 1 COM port(Rear) 1 COM port(Front) DOM: 2 SuperDOM (Disk on Module) ports TPM: 1 TPM Onboard/port 80

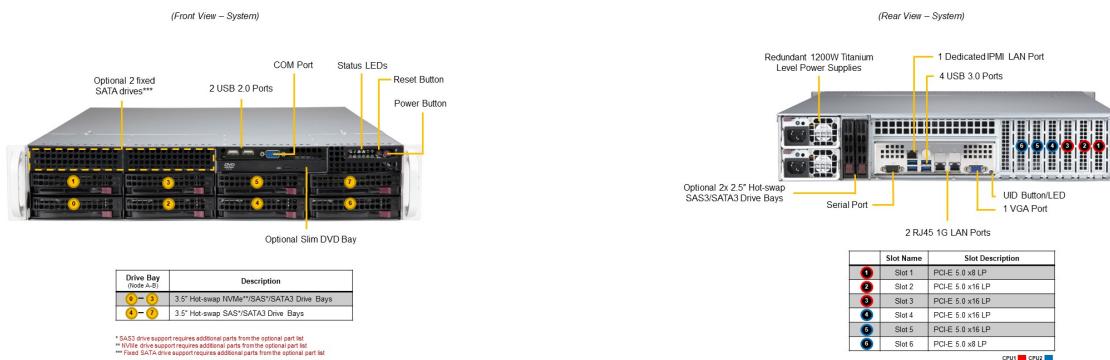

System Cooling

Fans: Up to 3 middle 8cm Fan(s)

Power Supply

2x 1200W Redundant (1 + 1) Titanium Level (96%) power supplies

System BIOS

BIOS Type: AMI 32MB SPI Flash EEPROM

Management

SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

PC Health Monitoring

CPU: Monitors for CPU Cores, Chipset Voltages, Memory

FAN: Fans with tachometer monitoring

Pulse Width Modulated (PWM) fan connectors

Status monitor for speed control

Temperature: Monitoring for CPU and chassis environment

Thermal Control for fan connectors

Dimensions and Weight

Weight: Gross Weight: 69 lbs (31.2 kg)

Net Weight: 36.38 lbs (16.5 kg)

Available Color: Black

Operating Environment

RoHS Compliant

Operating Temperature: 10°C to 35°C (50°F to 95°F)

Non-operating Temperature: -30°C to 60°C (-40°F to 140°F)

Operating Relative Humidity: 8% to 80% (non-condensing)

Non-operating Relative Humidity: 8% to 90% (non-condensing)

Motherboard

[Super X13DEI](#)

Chassis

[CSE-825BTS-R1K23LPP1](#)